


ROOF ACCESSORIES - ROOF HATCH RETROMOUNT SERIES - RHRM

The RetroMount series roof hatch has a low profile frame with integrated counterflash that is designed to mount on a roof curb. It is also a replacement option for a damaged roof hatch without re-roofing. Simply remove the existing hatch cover and reuse the existing curb.

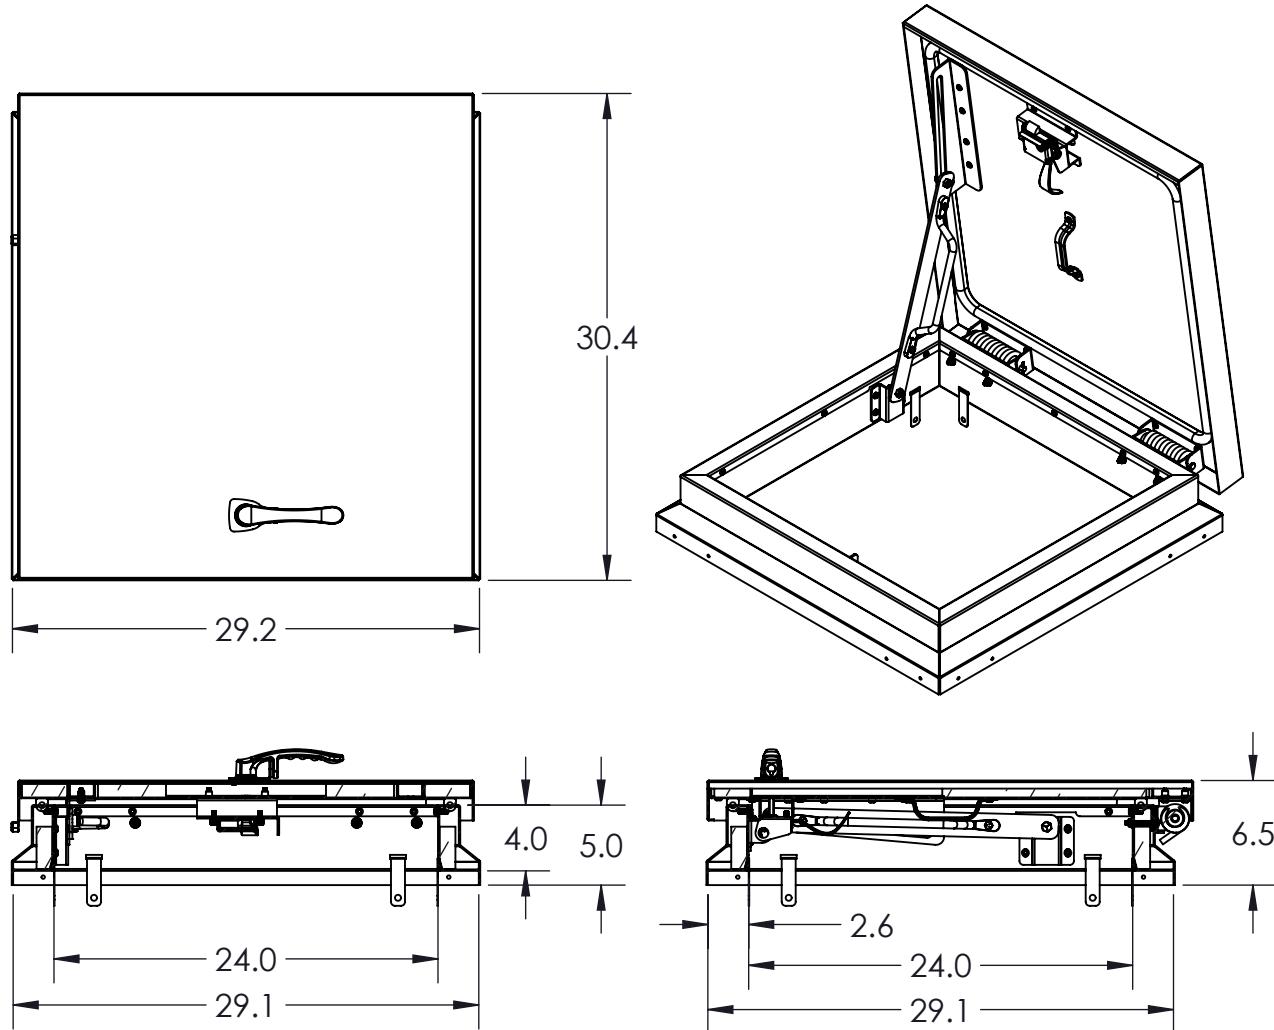

Specifications:

Material:

Frame: 11 gauge aluminum

Cover: 11 gauge with 18 gauge liner aluminum. Formed and welded cover with a liner. Supports a live load of 40psf.

Finish: Mill finish

Gasket: Continuous, weatherproof EPDM sponge rubber adhesivebacked seal

Insulation: 1" polyisocyanurate in curb and cover with thermal resistance R-6

Hold Open Arm: Clear zinc-plated automatic locking hold open arm with red vinyl grip for one handed door operation

Latch: Clear zinc-plated steel slam latch with inside and outside handles and padlock hasps. Holds covers closed against a 20psf wind uplift.

Hinge: Heavy duty zinc plated steel pintle hinge system

Springs: Powder coated, oil tempered, steel torsion spring provides counterbalanced door lift assistance

Hardware: Zinc-plated steel anchor tabs included with 1/4-20x3/4" Philips head, self-tapping sheet metal screws for securing to inside of existing curb

Size (W x L): 24" x 24" (where L is hinged side)

MODEL #: RHRMA-2424



CANADA ONLY: 604-433-4243 info@maxammetal.com maxammetal.com

© 2025 Activar Construction Products Group, Inc.

800-554-6077
sales@activarcpg.com
www.activarcpg.com

Distributor:	Project:	
Contractor:	Approved By:	
Date:	Architect:	
Scale: 1:12	Pages: 1 OF 1	Drawing #: RHRMA-2424-SUBMITTAL
REV: A	2/4/2026	

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.
 ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION IS PROHIBITED.