


## ROOF ACCESSORIES - ROOF HATCH RETROMOUNT SERIES - RHRM

The RetroMount series roof hatch has a low profile frame with integrated counterflash that is designed to mount on a roof curb. It is also a replacement option for a damaged roof hatch without re-roofing. Simply remove the existing hatch cover and reuse the existing curb.

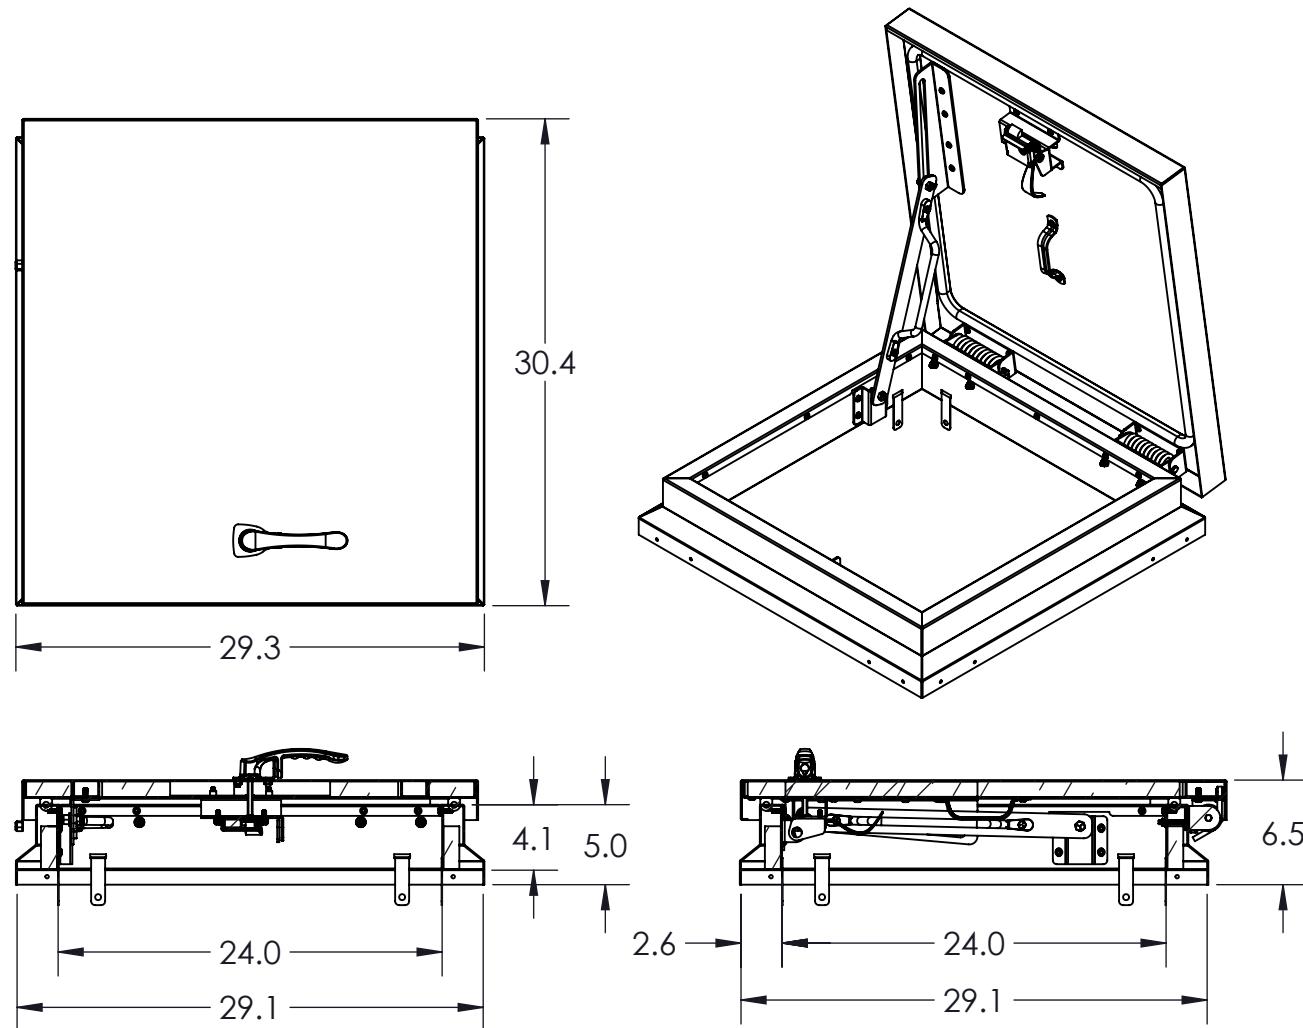

### Specifications:

#### Material:

**Frame:** 14 gauge galvannealed steel

**Cover:** 14 gauge with 22 gauge liner galvannealed steel. Formed and welded cover with a liner. Supports a live load of 40psf.

**Finish:** White textured powder coat paint on steel

**Gasket:** Continuous, weatherproof EPDM sponge rubber adhesivebacked seal

**Insulation:** 1" polyisocyanurate in curb and cover with thermal resistance R-6

**Hold Open Arm:** Clear zinc-plated automatic locking hold open arm with red vinyl grip for one handed door operation

**Latch:** Clear zinc-plated steel slam latch with inside and outside handles and padlock hasps. Holds covers closed against a 20psf wind uplift.

**Hinge:** Heavy duty zinc plated steel pintle hinge system

**Springs:** Powder coated, oil tempered, steel torsion spring provides counterbalanced door lift assistance

**Hardware:** Zinc-plated steel anchor tabs included with 1/4-20x3/4" Philips head, selftapping sheet metal screws for securing to inside of existing curb

**Size (W x L):** 24" x 24" (where L is hinged side)

**MODEL #:** RHRMG-2424WT



CANADA ONLY: 604-433-4243 info@maxammetal.com maxammetal.com

© 2025 Activar Construction Products Group, Inc.

800-554-6077  
[sales@activarcpg.com](mailto:sales@activarcpg.com)  
[www.activarcpg.com](http://www.activarcpg.com)

Distributor:	Project:	
Contractor:	Approved By:	
Date:	Architect:	

Scale: 1:12	Pages: 1 OF 1	Drawing #: RHRMG-2424WT-SUBMITTAL
		REV: A 2/5/2026

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.  
 ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION IS PROHIBITED.