


ROOF HATCH DEFLECTOR PLATE KIT: RHD-KIT-DEFLECTOR

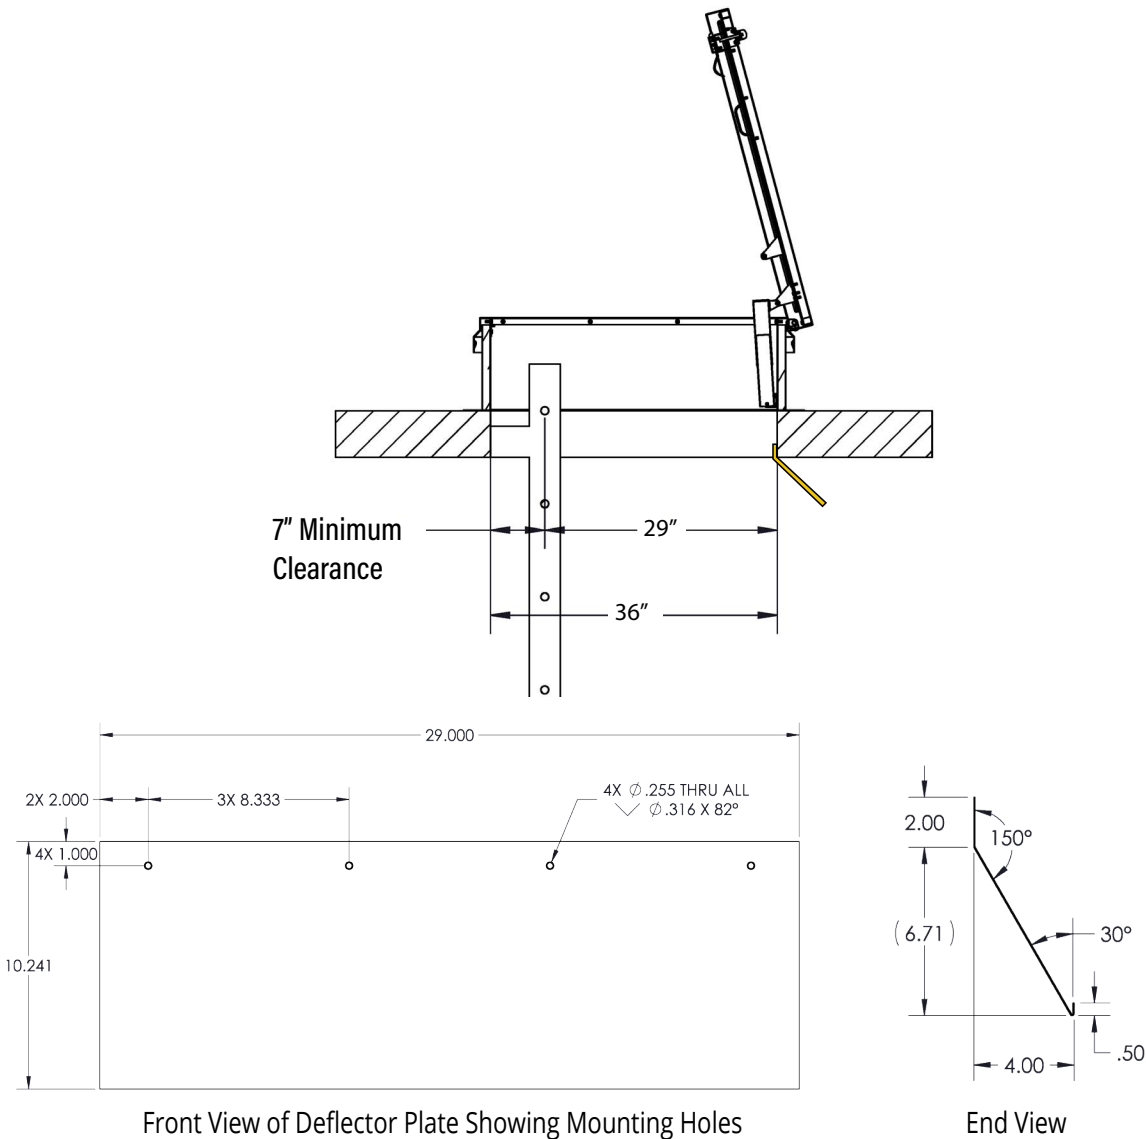

SPECIFICATIONS:

Material: 20 gauge cold rolled steel (CRS)


Finish: Yellow powder coat paint

Hardware: #8 flathead Philips screws

Notes:
OSHA 1910.23(d)(13)(ii) requires deflector plates for head hazards when the clearance is not sufficient. All ladder access roof hatches with widths greater than 37" require deflector plates, which includes industry standard roof hatch sizes like the 36"x30" model RHDG-1.


Installation Instructions:

1. Mount on hinged side.
2. Mount into wood blocking or other material supporting the roof hatch.

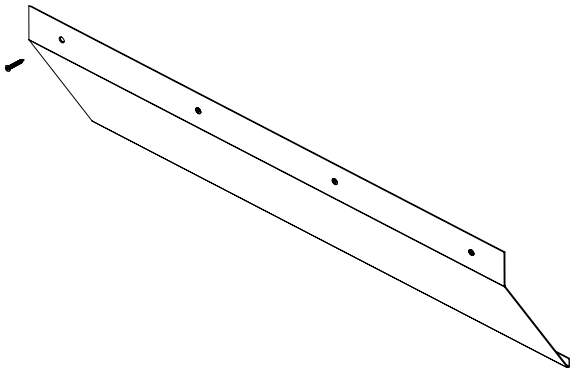



MODEL #: RHD-KIT-DEFLECTOR


It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.



JL INDUSTRIES
9702 Newton Avenue S, Bloomington, MN 55431

 800-554-6077

 sales@activarcpg.com

 www.activarcpg.com

Distributor:		Project:
Contractor:		Approved By:
Date:		Architect:
Scale: N/A	Pages: 1 of 1	Item #:

© 2024 Activar Construction Products Group, Inc.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION IS PROHIBITED.

Rev 15/2024