

# SUBMITTAL: ADJUSTABLE GATE FOR SAF-T-HATCH™ RAILING

This self-closing, telescoping rigid steel gate can help you comply with OSHA CFR 29 - 1910.29 by providing additional fall protection of rooftop openings. Can be easily installed on JL Saf-T-Hatch Safety Railings. The gate clamps to the upright post and the gate width can easily be adjusted to opening sizes from 24" to 36".

**SPECIFICATIONS:**

**Material:** 1.625" diameter galvalneal steel tubing. 1.5" x 1.5" square galvalneal steel tubing.

**Finish:** Safety yellow powder coat paint finish

**Hardware:** Zinc-plated steel threaded bolts, nuts, and washers.

**Hinge Clamp:** Designed to mount to 1.66 O.D. steel tubing.


**Fits Safety Railing Models:** SHWC 3036, 3054, 3096, 3636 and 4848


**Note:** Saf-T-Hatch™ Safety Railing sold separately from gate. See separate submittal.



Gate Installed on SHWC 3036 Safety Railing (Railing Sold Separately)

Qty	Model	Opening Size	Weight
	SHG-2436	30" x 36"	20 lbs

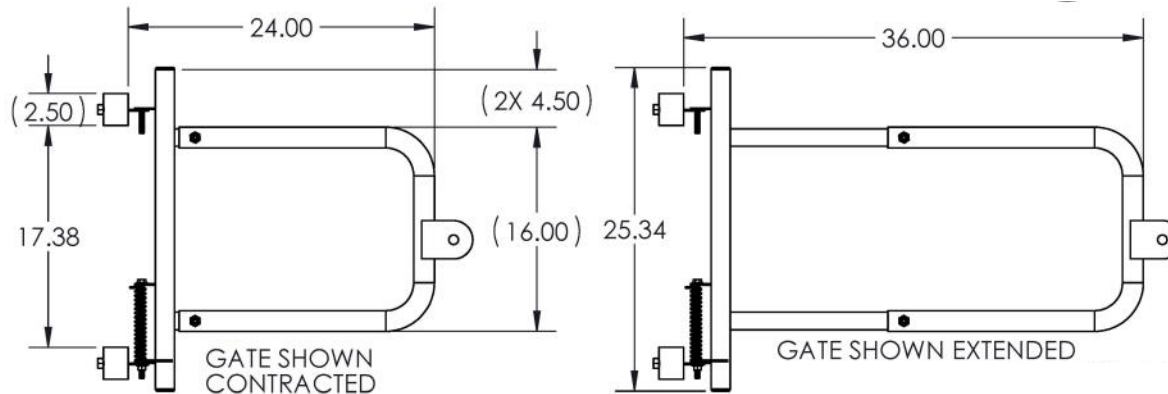

 <b>JL INDUSTRIES</b>	Distributor:	Quantity:
	Contractor:	Approved By:
	Model #:	Architect:
	Project:	Date: © 2022 Activar Construction Products Group, Inc.
<b>HEADQUARTERS:</b> 9702 NEWTON AV S, BLOOMINGTON, MN 55431 <b>PH:</b> 800-554-6077 <b>EMAIL:</b> SALES@ACTIVARCPG.COM <b>WWW.ACTIVARCPG.COM</b> <b>MANUFACTURING:</b> COMMERCE CA & BLOOMINGTON MN <b>WAREHOUSES:</b> SEE WEBSITE FOR LOCATIONS 11/16/2022		