

STANDARD VISION LITE FOR 5/16" - 1-11/16" GLASS & UP TO 3" DOOR: VLFEZIG LEADLINED


Beveled Profile Vision Lite for Glass Thicknesses up to 1-11/16". Several Lead Thicknesses Available, and Options for Leadlined Glass. Not a Fire-Rated Product.

SPECIFICATIONS:

Material:	20 gauge CRS frame. Min. size 4" x 4", max 60" x 104".
Construction:	1-1/4" trim with radius corners, mitered and welded. Continuous glass retainer, countersunk mounting holes either in the bevel or on the face of the non-corridor side, depending on thickness required. Frame projects 3/8".
Door:	For 1" - 3" thick. Specify door thickness: _____ Door cutout = order size.
Fasteners:	#8 x 1" flathead Phillips SMS to match finish.
Powder Coat Finishes:	<input type="checkbox"/> (B) Mineral Bronze (standard color) <input type="checkbox"/> (BK) Black <input type="checkbox"/> (FBK) Flat Black <input type="checkbox"/> (W) White <input type="checkbox"/> (SB) SC Beige <input type="checkbox"/> (SI) Silver <input type="checkbox"/> (BRA) Brass <input type="checkbox"/> (S) Sand <input type="checkbox"/> (G) Gray <input type="checkbox"/> (AB) AMS Beige View Colors Online
Glass:	_____ " Glass Thickness Will Be Used for this Order 5/16" - 1-11/16" glazing to be ordered separately from Glazing Section below. Visible light is 2" under rough opening size. <u>Glass size is 1" under order size.</u> Must specify glass thickness above. If glazing is being provided by a supplier other than Air Louvers, coordinate with the supplier to ensure compatibility with Air Louvers IG kits.
Lead Lining:	_____ 1/16" (.0625", 1.5875 mm) thickness lead sheeting applied to inside of frame.




Leadlining Shown Below in Yellow

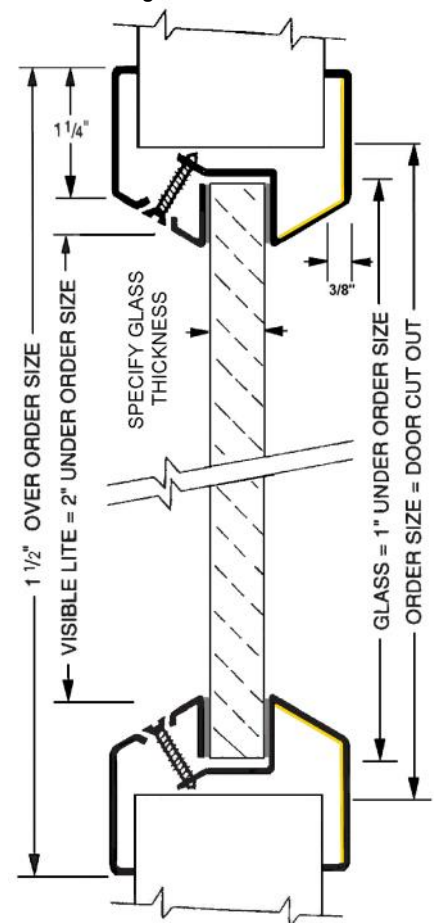

Note: customer must order x-ray glass and vision lite to the same protective shielding level as lead lined door. Consult local health physicist to determine lead requirements.

OPTIONS AT ADDITIONAL COST:

Lead Lining on Vision Kit:	<input type="checkbox"/> 5/64" (.0781", 1.9844 mm) thickness <input type="checkbox"/> 3/32" (.0937", 2.3812 mm) thickness <input type="checkbox"/> Other: Specify: _____
Finishes & Materials:	<input type="checkbox"/> (S) 18 Gauge Stainless Steel: #4 Finish. <input type="checkbox"/> (G) Galvanneal Sheet for Exterior Applications. <input type="checkbox"/> (E) Zinc Plated for Maximum Corrosion Resistance. <input type="checkbox"/> Optional colors. Please provide color chip & contact Customer Service.
Fasteners:	<input type="checkbox"/> Torx <input type="checkbox"/> Other: _____
LGSHIELD Leaded Glazing:	<input type="checkbox"/> 2.0 mm Lead Equivalent (.078") 5/16" glass (see separate data sheet for more information on LGSHIELD glazing) <input type="checkbox"/> 2.4 mm Lead Equivalent (.095") 5/16" glass <input type="checkbox"/> 3.2 mm Lead Equivalent (.126") 5/8" glass <input type="checkbox"/> 4.0 mm Lead Equivalent (.157") 5/8" glass <input type="checkbox"/> Other Lead Equivalent: _____ <input type="checkbox"/> Tinted or obscure patterns <input type="checkbox"/> Optically Clear Glass

 AIR LOUVERS <small>© 2023 ACTIVAR CONSTRUCTION PRODUCT GROUP, INC.</small>	Distributor: _____	Width: _____ x Height: _____
	Architect: _____	Quantity: _____
	Contractor: _____	Fill in Door Thickness and Glass Thickness Above:
	Project: _____	Date: _____
HEADQUARTERS: 9702 NEWTON AV S, BLOOMINGTON, MN 55431 PH: 800-554-6077 11/17/2023 EMAIL: SALES@ACTIVARCPG.COM • WWW.ACTIVARCPG.COM/AIR-LOUVERS • © 2017 ACTIVAR CONSTRUCTION PRODUCT GROUP, INC. MANUFACTURING: BLOOMINGTON MN/COMMERCE CA • WAREHOUSES: SEE WEBSITE FOR LOCATIONS		