## SUBMITTAL: CROWNLINE™ FIRE-FX2™ VALVE & HOSE CABINETS - STEEL PG 1 OF 2

Fire-Rated Crownline Cabinets Provide A Wide Selection of Door Styles, Glazing and Sizes. These Durable Cabinets are Designed to Industry Standards for Fire Department Valves, Fire Hose Rack Units and Extinguishers.


Door & Trim: Cold rolled steel with white powder coat finish standard. 1-3/4" Trim on face and door. Flush cabinet doors are mounted in a 5/8" door stop, are attached by a continuous hinge and are equipped with zinc-plated handle and roller catch for all non-locking doors. .

Trim Style and Depth: 1-3/4" face trim on frame and 1-1/4" trim on door. Recessed - 3/8" flat trim. Semirecessed - 1-1/4" Square Edge or 2-1/2" Rolled Edge. See separate submittal for trimless models.

**Tub:** The tub is constructed of cold rolled steel with white powder-coat finish standard. Tub forms a flange to cover cut edges of wallboard material. Fire-resistant material is attached to the exterior of the tub.

Knockouts: Knockouts are not provided on Fire-Rated Cabinets. Instructions for Knockouts in the field are provided and must be strictly adhered to, in order to maintain fire rating.


Fire Rating: Fire-FX2™ cabinets are UL listed and labeled as an approved membrane penetration firestop system for up to 2 hours in accordance with UL 1479 (ASTM-E814) and CAN/ULC-S115, when properly installed in a wall assembly according to installation instructions.



G - Full glass with pull handle and Saf-T-Lok (Not Shown)

D - Horizontal duo panel with pull E - Horizontal duo panel with pull and Saf -T-Lok. (Not Shown)

with pull W - Vertical duo panel with pull and Saf-T-Lok. (Not Shown)



S21 - Solid with pull L22 - Solid with pull and Saf-T-I ok L24 - Solid with cylinder key lock/no pull

B10 - Acrylic view window with pull. and Saf-T-Lok

A - Center duo panel Saf-T-Lok

## (L22,24 not shown) FIRE-FX2 CABINET WITH NEW LIGHTWEIGHT INSULATION -Span" Insulati Foil-Backed - 3/16" Typica L\_Tub TYPICAL INSTALLATION

## STEP 1: SELECT MODEL NUMBER, TRIM & QUANTITY (Refer to Chart on Page 2)

ST	EP 2	2: SELECT DOOR STYLE WITH HANDLE	(Check one box below)			
	F	Full Glazing		L22 Solid with SAF-T-LOK		
	G	Full Glazing with SAF-T-LOK		V Vertical Duo		
	D	Horizontal Duo Panel		W Vertical Duo with SAF-T-LOK		
	Е	Horizontal Duo Panel with SAF-T-LOK		<b>B10</b> Acrylic View Window with SAF-T-LOK		
	Α	Center Duo Panel with SAF-T-LOK		<b>L24</b> Solid with Cylinder Lock & No Handle		
S21 Solid Door				View Door Styles		
ST	EP 3	3: <u>SELECT DOOR GLAZING</u>		(Check one box below)		
	10 (	Clear Acrylic		16 Gray Acrylic		
	13 (	Clear Wire Glass with Wire Glass		17 Clear Tempered Glass		
	15 E	Bronze Acrylic		18 Laminated Safety Glass		

STEP 4: OPTIONAL FEATURES AT ADDITIONAL COST:							
	Optional Tub Color: BlackRed		(MC) Magnetic Catch—Replaces Roller Catch		Fire Extinguisher Lettering:		
	Optional Color: Red Black Sand		FDVO Decal Fire Department Valve Octagonal 6 x 6"		Black Vertical FE Letters LDCVBFE		
	AMS Beige SC Flat Beige Gray		<b>1403</b> Decal <b>Fire Hose</b> Black/Red Horiz. Letters 4 x 9		Red Vertical FE Letters LDCVRFE		
	Bronze Silver Flat Black		LDCHRFDV-R Diecut Fire Dept. Valve Horiz.10-1/4 x 4-3/8		White Vertical FE Letters LDCVWFE		
	CA Commander Alarm		LDCVRFDV Diecut Fire Dept Valve Vert. 3/4" x 211/2"		Black Horizontal FE Letters <b>LDCHBFE</b>		
	<b>BA</b> Brigadier Alarm		LDCVRFDV-R Diecut Fire Dept Valve Vert. Rever. 3/4" x 211/2"		Red Horizontal FE Letters LDCHRFE		
	Futura "Fire" HandleMillRedWhite		LDCHRFDV Diecut Fire Department Valve Ascend. 1" x 17"		White Horizontal FE Letters LDCHWFE		
	PRH Recessed Pull Handle		LDCVRFSCV-R Diecut Fire Sprinkler Cont. Valve Vert 3/4" x 18"		Shelf for 8000 Series, 12" from Top		
	PUCH Polished Chrome Handle		Etched Glass, Engraved Metal or Silkscreen Lettering (Check B	ox 8	& Attach Separate Submittal)		


It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.


	Distributor:	Quantity:
JL INDUSTRIES	Contractor:	Approved By:
	Model #:	Architect:
©2023 Activar Construction Products Group, Inc.	Project:	Date:

HEADQUARTERS: 9702 NEWTON AVE S, BLOOMINGTON, MN 55431 Ph: 800-554-6077 EMAIL: SALES@ACTIVARCPG.COM WWW.ACTIVARCPG.COM MANUFACTURING: BLOOMINGTON, MN & COMMERCE, CA WAREHOUSES: SEE WEBSITE FOR LOCATIONS 12/22/2023

## SUBMITTAL: CROWNLINE™ FIRE-FX2 VALVE & HOSE CABINETS - STEEL

**PG 2 OF 2** 



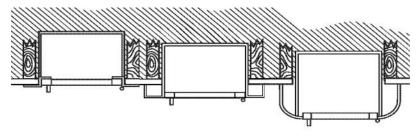

3/8" (.9cm) FLAT TRIM

1-1/4" (3.8cm) SQUARE TRIM

2-1/2" (6.4cm) ROLLED EDGE

CAB	INET	PRO	FIL	ES
-----	------	-----	-----	----

TRIM & DOOR MATERIAL & SERIES		TUB I.D. W x H x D in Inches			FRAME O.D.		RECESSED WALL OPENING DIMS.			RECOMMENDED HOSE RACK, FIRE DEPARTMENT VALVES &
QTY # TRIM STYLE		Α	В	С	Е	F	Width	Height	Depth	EXTINGUISHERS
	Cabinets with Hose Rack & Extinguisher or Fire Department Valve									
6015	FLAT TRIM 3/8"	24	30	6	27 3/8	33 3/8	26 5/16	32 5/16	6 15/16	HOSE RACK: 1- 1/2" x 1-1/2" Hose Rack Unit with 50 or
6016	1-1/4" SQUARE EDGE	24	30	6	27 3/8	33 3/8	26 5/16		5 15/16	75' Hose (HRA:050B, 050CH, 075B, 075CH)
6017	2-1/2" ROLLED EDGE	24	30	6	27 3/8	33 3/8	26 5/16	32 5/16	4 11/16	& Cosmic 2½ or Galaxy 2½- 5 lb Extinguisher
6215	FLAT TRIM 3/8"	24	34 3/4	6	27 3/8	38 1/8	26 5/16		6 15/16	HOSE RACK: 1- 1/2" x 1-1/2" Hose Rack Unit - 100'
6216	1-1/4" SQUARE EDGE	24	34 3/4	6	27 3/8	38 1/8	26 5/16		5 15/16	Hose (HRA 100B, HRA100CH)
6217	2-1/2" ROLLED EDGE	24	34 3/4	6	27 3/8	38 1/8	26 5/16		4 11/16	& Cosmic 2½ or Galaxy 2½- 5 lb Extinguisher
6115	FLAT TRIM 3/8"	24	30	8	27 3/8	33 3/8	26 5/16		8 15/16	HOSE RACK:
6116	1-1/4" SQUARE EDGE	24	30	8	27 3/8	33 3/8	26 5/16		7 15/16	2-1/2" x 1-1/2" Hose Rack Unit
6117	2-1/2" ROLLED EDGE	24	30	8	27 3/8	33 3/8	26 5/16		6 11/16	50 or 75' Hose (HRA050B-2.5, HRA075B-2.5)
6415	FLAT TRIM 3/8"	24	34 3/4	8	27 3/8	38 1/8	26 5/16		8 15/16	HOSE RACK:
6416	1-1/4" SQUARE EDGE	24	34 3/4	8	27 3/8	38 1/8	26 5/16		7 15/16	2-1/2" x 1-1/2" Hose
6417	2-1/2" ROLLED EDGE	24	34 3/4	8	27 3/8	38 1/8	26 5/16		6 11/16	Rack Unit 100' Hose (HRA100B-2.5)
6615	FLAT TRIM 3/8"	24	38 3/4	8	27 3/8	42 1/8	26 5/16		8 15/16	HOSE RACK:
6616	1-1/4" SQUARE EDGE	24	38 3/4	8	27 3/8	42 1/8	26 5/16		7 15/16	2-1/2" x 1-1/2" Hose
6617	2-1/2" ROLLED EDGE	24	38 3/4	8	27 3/8	42 1/8	26 5/16		6 11/16	Rack Unit 125' Hose (HRA125B-2.5)
6315	FLAT TRIM 3/8"	30	30	8	33 3/8	33 3/8	32 5/16		8 15/16	HOSE RACK & FD VALVE OR EXTINGUISHER:
6316	1-1/4" SQUARE EDGE	30	30	8	33 3/8	33 3/8	32 5/16		7 15/16	1-1/2" OR 2-1/2" Valve; 50' or 75' Hose Rack Unit
6317	2-1/2" ROLLED EDGE	30	30	8	33 3/8	33 3/8	32 5/16		6 11/16	Plus FD Valve, Cosmic or Galaxy Extinguisher
6515	FLAT TRIM 3/8"	32 3/4	34 3/4	8	36 1/8	38 1/8	35 1/16		8 15/16	HOSE RACK & FD VALVE OR EXTINGUISHER:
6516	1-1/4" SQUARE EDGE	32 3/4	34 3/4	8	36 1/8	38 1/8	35 1/16		7 15/16	1-1/2" OR 2-1/2" Valve, 100' Hose Rack Unit
6517	2-1/2" ROLLED EDGE	32 3/4	34 3/4	8	36 1/8	38 1/8	35 1/16		6 11/16	Plus FD Valve, Cosmic or Galaxy Extinguisher
7215	FLAT TRIM 3/8"	32 3/4	38 3/4	8	36 1/8	42 1/8	35 1/16		8 15/16	HOSE RACK & FD VALVE OR EXTINGUISHER:
7216	1-1/4" SQUARE EDGE	32 3/4	38 3/4	8	36 1/8	42 1/8	35 1/16		7 15/16	1-1/2" OR 2-1/2" Valve,125' Hose Rack Unit
7217	2-1/2" ROLLED EDGE	32 3/4	38 3/4	8	36 1/8	42 1/8		41 1/16	6 11/16	Plus FD Valve, Cosmic or Galaxy Extinguisher
						for Fire				
8515	FLAT TRIM 3/8"	18	18	8	21 3/8	21 3/8	20 5/16		8 15/16	
8516	1-1/4" SQUARE EDGE	18	18	8	21 3/8	21 3/8	20 5/16		7 15/16	FIRE DEPARTMENT VALVE:
8517	2-1/2" ROLLED EDGE	18	18	8	21 3/8	21 3/8	20 5/16		6 11/16	1-1/2" or 2-1/2"
8415	FLAT TRIM 3/8"	18	18	10	21 3/8	21 3/8	20 5/16		10 15/16	Fire Department Valve
8416	1-1/4" SQUARE EDGE	18	18	10	21 3/8	21 3/8	20 5/16		9 15/16	with Cap and Chain
8417	2-1/2" ROLLED EDGE	18	18	10	21 3/8	21 3/8	20 5/16		8 11/16	
8715	FLAT TRIM 3/8"	26	26	8	29 3/8	29 3/8	28 5/16		8 15/16	
8716	1-1/4" SQUARE EDGE	26	26	8	29 3/8	29 3/8	28 5/16		7 15/16	DUAL SIDE BY SIDE FIRE DEPARTMENT VALVE & EXTINGUISHER OR 2 FIRE DEPARTMENT VALVES:
8717	2-1/2" ROLLED EDGE	26	26	8	29 3/8	29 3/8	28 5/16		6 11/16	1-1/2" or 2-1/2" Fire Department Valve
8615	FLAT TRIM 3/8"	26	26	10	26 1/4	26 1/4	28 5/16		10 15/16	with Cap and Chain
8616	1-1/4" SQUARE EDGE	26	26	10	26 1/4	26 1/4	28 5/16		9 15/16	Plus Cosmic or Galaxy 2-1/2-10 lb Extinguisher
8617	2-1/2" ROLLED EDGE	26	26	10	26 1/4	26 1/4	28 5/16		8 11/16	
8015	FLAT TRIM 3/8"	16	40	9	19 3/8	43 3/8	18 5/16		9 15/16	DUAL EXTINGUISHER & FD VALVE CABINET:
8016	1-1/4" SQUARE EDGE	16	40	9	19 3/8	43 3/8	18 5/16		8 15/16	Cosmic or Galaxy Extinguisher
8017	2-1/2" ROLLED EDGE	16	40	9	19 3/8	43 3/8	18 5/16	42 5/16	7 11/16	,

**ADA Cabinet Mounting Height:** Standard Pull on G, E, W, L22, A and B Door Styles with Saf-T-Lok are 3 5/8" Higher than Door Center, so Allow for that When Mounting Cabinet. Standard Pull with No Lock or Doors with Recessed Pull are Centered on Door.