


VISION LITE FOR 3/16-1/4" GLASS: VLF™

Standard, Multi-Purpose, Thru-Bolted Square Profile Vision Lite for Up to 1/4" Thick Glazing

SPECIFICATIONS:

Material:	18 gauge CRS frame. Min Size 4" x 4", Max 60" x 104". See Fire Rating Below.
Construction:	1-1/4" trim with radius corners, mitered and welded. Countersunk mounting holes on both sides.
Door:	For 1-3/4" door. For other sizes, see models VSIG, VLFIG & VLFEZIG. Door cutout = order size.
Fasteners:	#8 x 32 flathead phillips head thrubolts with blank heads one side to match finish.
Powder Coat Finishes:	____ (B) Mineral Bronze (standard color) ____ (G) Gray ____ (BK) Black ____ (FBK) Flat Black ____ (W) White ____ (SB) SC Beige ____ (SI) Silver ____ (BRA) Brass ____ (S) Sand ____ (AB) AMS Beige View Colors Online
Glass:	3/16" - 1/4" glazing to be ordered separately from glazing submittals. Visible light is 1" under rough opening size. Glass is 1/4" under order size. Use fire rated glazing with Warnock Hersey (WHI) or UL classification markings for fire rated applications. Compatible Fire-Rated Air Louvers: WS, KFRF, PPF.
Fire-Rating, Testing & Listings:	When installed in properly rated and approved door, ratings up to 3 hours can be achieved, depending on the glazing used. See glazing ratings for max exposed area. Tested and Listed for UL 10C and Criteria of UBC 7-2 Positive Pressure. See detailed installation instructions.

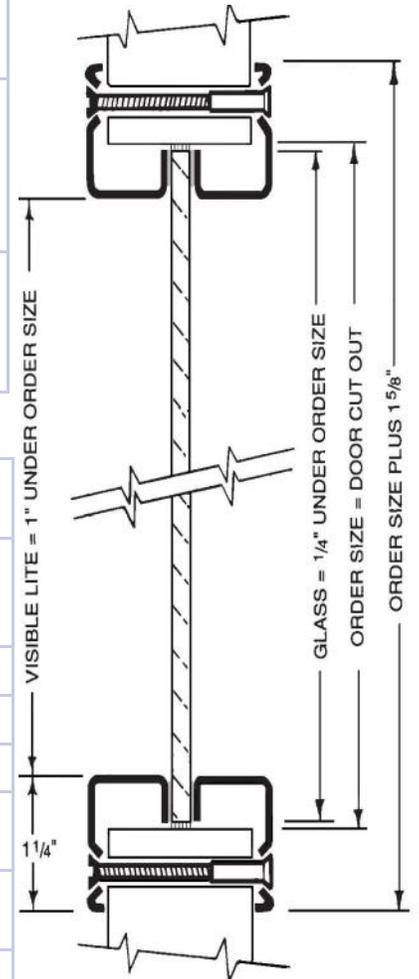

OPTIONS AT ADDITIONAL COST:



UBC 7-2 Installation:	____ Additional intumescent tape for Positive Pressure UL10C . See detailed installation instructions.
Finishes & Materials:	____ (S) 18 Gauge Stainless Steel: #4 Finish. ____ (G) Galvanneal ____ (E) Zinc Plated
Fasteners:	____ Torx ____ Other: _____
Mullions:	Factory welded to vision lite & painted. See Mullions Page to order.
Custom:	PAK, leadlined or special orders—contact customer service.
Round Frame:	____" Diameter 12", 18", 24" common. Min. 6" diameter, max 25" diameter. 
Privacy Door:	VLFPVC 16 gauge door on continuous hinges welded to vision lite. (Not F.R.) Minimum size 4" x 4", max size 24" x 36". See separate submittal.
Privacy Screen:	Add the Velo Privacy Screen to This Vision Lite— See Web Page for Details

Order Format: **VLF**

Option S,G,E W H Color

Example: **VLF 1212FBK**

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

 <p>AIR LOUVERS</p> <p>© 2023 Activar Construction Products Group, Inc.</p>	Distributor:	Width: ____ x Height: ____
	Architect:	Quantity:
	Contractor:	Model:
	Project:	Date: _____ Version: 11/17/23
<p>800-554-6077 QUOTES@ACTIVARCPG.COM ORDERS@ACTIVARCPG.COM SALES@ACTIVARCPG.COM</p> <p>WWW.ACTIVARCPG.COM</p> <p>MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: SEE WEBSITE FOR LOCATIONS</p>		