


# BEVELED VISION LITE FOR 3/16" - 1/4" GLAZING: VLFEZ™

Self-Attaching, Beveled Vision Lite with Single Side Fasteners For Fire Rated Doors for 3/16" to 1/4" Glass

## SPECIFICATIONS:

|   |   |
|---|---|
| <b>Material:</b>                            | 20 gauge CRS frame. Min Size 4" x 4", Max 60" x 104". See Fire Rating Below.  |
| <b>Construction:</b>                        | 1-1/4" trim, with mitered and welded corners. Continuous glass retainer, counter-sunk mounting holes in the bevel on non-corridor side. 1/4" projection from door.  |
| <b>Door:</b>                                | For 1-3/4" door. For other sizes, see models VSIG, VLFIG & VLFEZIG.<br><b>Door cutout = order size.</b>   |
| <b>Fasteners:</b>                           | #8 x 1" flathead phillips SMS to match finish.  |
| <b>Powder Coat Finishes:</b>                | ___ (B) Mineral Bronze ___ (G) Gray (stock colors)<br>___ (BK) Black ___ (FB) Flat Black ___ (W) White ___ (SB) SC Beige<br>___ (SI) Silver ___ (BA) Brass ___ (S) Sand<br>___ (AB) AMS Beige <a href="#">View Colors Online</a>  |
| <b>Glass:</b>                               | 3/16" - 1/4" glazing to be ordered separately from glazing submittals.<br><b>Visible light is 2" under rough opening size. Glass is 1" under order size.</b><br>Use fire rated glazing with Warnock Hersey (WHI) or UL classification markings for fire rated applications.<br><b>Fire-Rated Air Louvers Glazing to fit this vision frame: WS, PPF.</b> |
| <b>Fire-Rating, Testing &amp; Listings:</b> | When installed in properly rated and approved door, ratings up to 3 hours can be achieved, depending on the glazing used. See glazing ratings for max exposed area. Tested and Listed for UL 10C and Criteria of UBC 7-2 Positive Pressure. See detailed installation instructions.   |

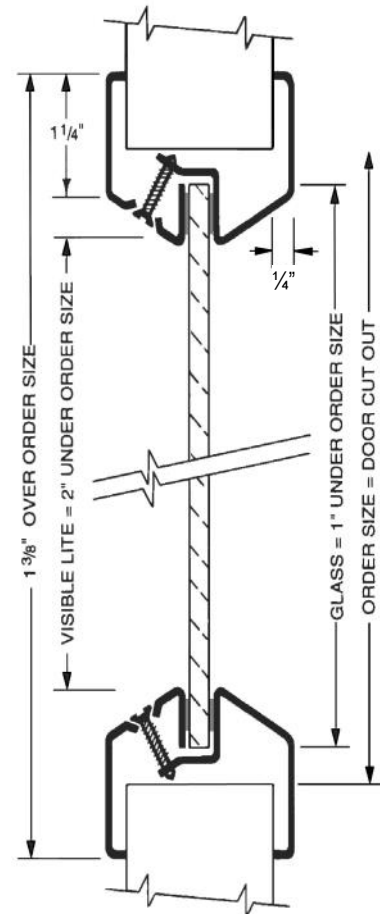

## OPTIONS AT ADDITIONAL COST:



|                                  |   |
|----------------------------------|---|
| <b>PAK:</b>                      | Includes Vision Lite, Glass Sized to Fit, Applied Glazing tape for UL10B Installations, Securely Packaged Individually. <b>See First Page in Vision Lite Catalog.</b> |
| <b>UBC 7-2 Installation:</b>     | ___ Additional intumescent tape for <b>Positive Pressure UL10C.</b><br>See detailed installation instructions.  |
| <b>Finishes &amp; Materials:</b> | ___ (S) 20 Gauge Stainless Steel: #4 Finish.<br>___ (G) Galvanneal<br>___ (E) Zinc Plated   |
| <b>Fasteners:</b>                | ___ Torx ___ Other: _____   |
| <b>Mullions:</b>                 | Factory welded to vision lite & painted. See Mullions Page in this section to order.  |
| <b>Privacy Screen:</b>           | Add the Velo Privacy Screen to This Vision Lite— <a href="#">See Web Page for Details</a>   |
| <b>Custom:</b>                   | Leadlined or special order—contact customer service.  |


**STOCK ITEM - MANY STANDARD SIZES OF VLFEZ IN STOCK FOR NEXT DAY SHIPMENT FROM ALL WAREHOUSES**

Order Format: VLFEZ

Option S,G,E W H Color

Example: VLFEZ 1212AB

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

|  |                     |                               |
|--|---------------------|-------------------------------|
|  <p><b>AIR LOUVERS</b></p> <p>© 2025 Activar Construction Products Group, Inc.</p>  | <b>Distributor:</b> | Width: ___ x Height: ___      |
|  | <b>Architect:</b>   | Quantity:                     |
|  | <b>Contractor:</b>  | Model:                        |
|  | <b>Project:</b>     | Date: _____ Version: 1/9/2025 |
| <p>800-554-6077 <a href="mailto:QUOTES@ACTIVARCPG.COM">QUOTES@ACTIVARCPG.COM</a> <a href="mailto:ORDERS@ACTIVARCPG.COM">ORDERS@ACTIVARCPG.COM</a> <a href="mailto:SALES@ACTIVARCPG.COM">SALES@ACTIVARCPG.COM</a></p> <p><b>WWW.ACTIVARCPG.COM</b></p> <p>MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: SEE WEBSITE FOR LOCATIONS</p> |                     |                               |