HURRICANE & HIGH WIND VELOCITY PAK: VLFEZHRC PAK™




Beveled Vision Lite With Continuous Glass Retainer. Recommended for Applications Requiring Safety From Wind-Borne Debris. Includes Tested and Approved Polycarbonate Glazing and Caulking.

Florida Building Code Approved

SPECIFICATIONS:

Material:	20 gauge galvanneal steel frame. Minimum size 4" x 4", maximum size 23 5/8" x 61 3/8". See testing information below			
Construction:	1-1/4" trim with mitered and welded corners, beveled return, and countersunk mounting holes in the bevel. Screws fasten from room side into pre-punched mounting holes. This mounting method leaves corridor side of frame free of fasteners for aesthetic and security purposes.			
Powder Coat Finishes:	(B) Mineral Bronze (standard color) (BK) Black (FB) Flat Black (W) White (SB) SC Beige (SI) Silver (BA) Brass (S) Sand (AB) AMS Beige (G) Gray View Colors Online			
Door:	For 1-3/4" door. Door cutout = order size.			
Fasteners:	#8 x 1" flathead phillips head screws to match finish.			
Glazing:	1/4" Lexan® glazing Included Glass size is 1" under order size			
Caulking:	Dow Corning 995® for caulking on both sides of glazing.			
Glazing & Caulking included with Vision Frame				



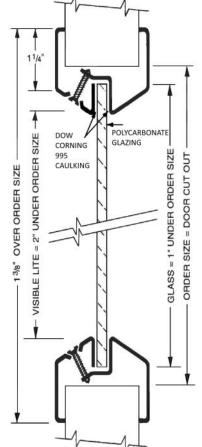

HURRICANE RATING

Severe Windstorm Testing:

Intertek Warnock Hersey listed and labeled to ASTM E330, E1886, E1996, ANSI 250.13

TAS 201, TAS 202, TAS 203

Design pressure +/- 55 psf, Impact resistance 350 ft-lbs, Missile D, Wind zone 4

Florida Product Approval

File # FL 13187



Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

	Distributor:		Width:	_x Height:		
AIR LOUVERS	Architect:		Quantity:			
	Contractor:		Model:			
© 2023 Activar Construction Products Group, Inc.	Project:		Date:	Version: 11/17/2023		
800-554-6077 QUOTES	@ACTIVARCPG.COM	ORDERS@ACTIVARCPG.COM	SALES@ACTIVARCPG.COM			
WWW.ACTIVARCPG.COM						

MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: SEE WEBSITE FOR LOCATIONS