


Recommended for Applications Requiring Fire Rated, Safety, and or Insulated Glazing Up to 1" Thick

### SPECIFICATIONS:

<b>Material:</b>	20 gauge CRS frame. Min Size 4" x 4", Max 60" x 104". See Fire Rating Below.
<b>Construction:</b>	1-1/4" trim with radius corners, mitered and welded. Continuous glass retainer, counter-sunk mounting holes in the bevel of the non-corridor side. Frame projects 3/8".
<b>Fasteners:</b>	#8 x 1" flathead phillips SMS to match finish.
<b>Powder Coat Finishes:</b>	<input type="checkbox"/> (B) Mineral Bronze (standard color) <input type="checkbox"/> (BK) Black <input type="checkbox"/> (FB) Flat Black <input type="checkbox"/> (W) White <input type="checkbox"/> (SB) SC Beige <input type="checkbox"/> (SI) Silver <input type="checkbox"/> (BA) Brass <input type="checkbox"/> (S) Sand <input type="checkbox"/> (G) Gray <input type="checkbox"/> (AB) AMS Beige <a href="#">View Colors Online</a>
<b>Door:</b>	<b>Specify Door Thickness:</b> ____ Use this page for 1" to 1 <sup>3</sup> / <sub>4</sub> " Doors. For Doors that are Thicker than 1 <sup>3</sup> / <sub>4</sub> " - Use page 2. Door cutout = order size.
<b>Door &amp; Glazing Thickness**:</b>	If door thickness minus glass thickness is greater than or equal to 3/4" use page 1 to order. If door thickness minus glass thickness is less than 3/4", use page 2 to order.
<b>Glazing:</b>	<p><b>Specify Glass Thickness:</b> ____ Up to 1". See page 2 for glazing thicker than 1". See page 2 if door thickness minus glass thickness is less than 3/4"</p> <p><b>Visible light is 2" under rough opening size. Glass is 1" under order size.</b>            Glazing to be ordered separately from glazing submittals. If glazing is being provided by a supplier other than Air Louvers, coordinate with the supplier to ensure compatibility with this vision lite. Use fire-rated glazing with Intertek Warnock Hersey or UL classification markings for fire-rated applications.</p> <p><b>Compatible Air Louvers Glazing:</b> <del>KERL</del>, <del>KERU</del>, CT60, ARM1, WS, PYRO, PPF, KFRF.</p>
<b>Fire-Rating, Testing &amp; Listings:</b>	When installed in properly rated and approved door, ratings up to 3 hours can be achieved, depending on the glazing used. See glazing ratings for maximum exposed area. Tested and Listed for UL10C and Criteria of UBC 7-2 Positive Pressure. <b>VLFEZIG vision frames are UL listed and labeled</b> unless WHI Listing selected below: <input type="checkbox"/> Optional Intertek Warnock Hersey listed and labeled

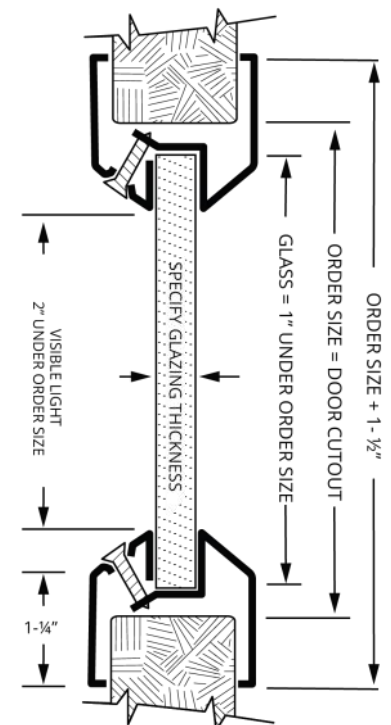


### OPTIONS AT ADDITIONAL COST:



<b>UL10C Installation:</b>	<input type="checkbox"/> Additional intumescent tape for <b>Positive Pressure UL10C</b> . See detailed installation instructions.
<b>Finishes &amp; Materials:</b>	<input type="checkbox"/> (S) 20 Gauge Stainless Steel: #4 Finish. <input type="checkbox"/> (G) Galvanneal <input type="checkbox"/> (E) Zinc Plated
<b>Fasteners:</b>	<input type="checkbox"/> Torx Screws <input type="checkbox"/> Other Fasteners: _____
<b>Mullions:</b>	Factory welded to vision lite & painted. See Mullions Page in this section to order.
<b>Custom:</b>	PAK, leadlined, or special orders, contact customer service.



Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

 <b>AIR LOUVERS</b> <small>© 2023 Activar Construction Products Group, Inc.</small>	<b>Distributor:</b>	<b>Width:</b> ____ <b>x Height:</b> ____
	<b>Architect:</b>	<b>Quantity:</b>
	<b>Contractor:</b>	<b>Specify Door &amp; Glass Thickness Above</b>
	<b>Project:</b>	<b>Date:</b> ____ <b>Version:</b> 11/17/23
<b>800-554-6077</b> <a href="mailto:QUOTES@ACTIVARCPG.COM">QUOTES@ACTIVARCPG.COM</a> <a href="mailto:ORDERS@ACTIVARCPG.COM">ORDERS@ACTIVARCPG.COM</a> <a href="mailto:SALES@ACTIVARCPG.COM">SALES@ACTIVARCPG.COM</a> <b>WWW.ACTIVARCPG.COM</b> MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: SEE WEBSITE FOR LOCATIONS		

Recommended for Applications Requiring Fire Rated, Safety, and or Insulated Glazing up to 1-11/16"

**SPECIFICATIONS:**

<b>Material:</b>	20 gauge CRS frame. Min Size 4" x 4", Max 60" x 104". See Fire Rating Below.
<b>Construction:</b>	1-1/4" trim with radius corners, mitered and welded. Continuous glass retainer, countersunk mounting holes in the face of the non-corridor side.
<b>Fasteners:</b>	#8 x 1" flathead phillips SMS to match finish.
<b>Powder Coat Finishes:</b>	<input type="checkbox"/> (B) Mineral Bronze (standard color) <input type="checkbox"/> (BK) Black <input type="checkbox"/> (FB) Flat Black <input type="checkbox"/> (W) White <input type="checkbox"/> (SB) SC Beige <input type="checkbox"/> (SI) Silver <input type="checkbox"/> (BA) Brass <input type="checkbox"/> (S) Sand <input type="checkbox"/> (G) Gray <input type="checkbox"/> (AB) AMS Beige <a href="#">View Colors Online</a>
<b>Door:</b>	<b>Specify Door Thickness:</b> <input type="text"/> 1 3/4" to 3". For Doors that are 1 to 1-3/4" in thickness, use page 1. Door cutout = order size.
<b>Door &amp; Glazing Thickness**:</b>	If door thickness minus glass thickness is greater than or equal to 3/4" use page 1 to order. If door thickness minus glass thickness is less than 3/4", use page 2 to order.
<b>Glass:</b>	<b>Specify Glass Thickness:</b> <input type="text"/> Up to 1-11/16". <b>Visible light is 2" under rough opening size. Glass is 1" under order size.</b>  Glazing to be ordered separately from glazing submittals. If glazing is being provided by a supplier other than Air Louvers, coordinate with the supplier to ensure compatibility with this vision lite. Use fire-rated glazing with Intertek Warnock Hersey or UL classification markings for fire-rated applications  <b>Compatible Air Louvers Glazing:</b> <del>KERL, KERU</del> , CT60, ARM1, ARM2, ARM3, WS, PYRO, PPF, KFRF.
<b>Fire-Rating, Testing &amp; Listings:</b>	When installed in properly rated and approved door, ratings up to 3 hours can be achieved, depending on the glazing used. See glazing ratings for maximum exposed area. Tested and Listed for UL 10C and Criteria of UBC 7-2 Positive Pressure. <b>VLFEZIG vision frames are UL listed and labeled</b> unless WHI Listing selected below: <input type="checkbox"/> Optional Intertek Warnock Hersey listed and labeled

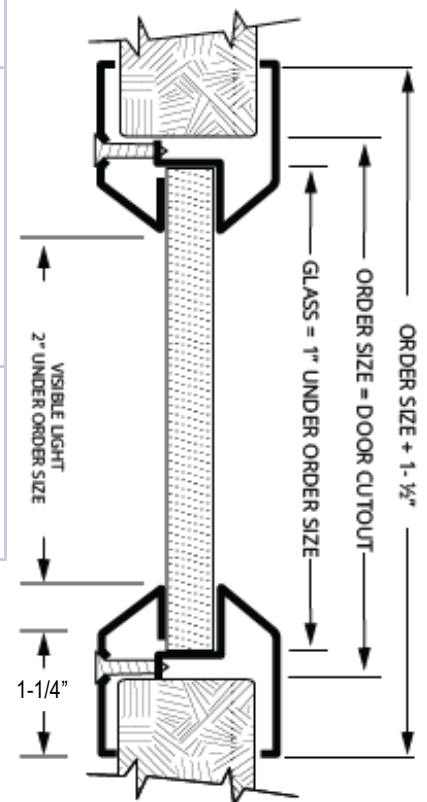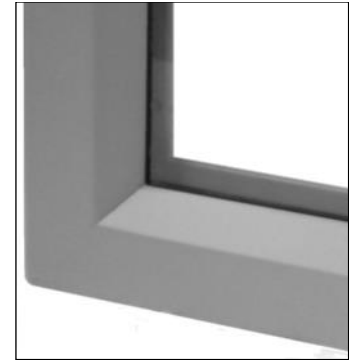


**OPTIONS AT ADDITIONAL COST:**



<b>UL10C Installation:</b>	<input type="checkbox"/> Additional intumescent tape for <b>Positive Pressure UL10C</b> . See detailed installation instructions.
<b>Finishes &amp; Materials:</b>	<input type="checkbox"/> (S) 20 Gauge Stainless Steel: #4 Finish. <input type="checkbox"/> (G) Galvanneal <input type="checkbox"/> (E) Zinc Plated
<b>Fasteners:</b>	<input type="checkbox"/> Torx Screws <input type="checkbox"/> Other Fasteners: <input type="text"/>
<b>Mullions:</b>	Factory welded to vision lite & painted. See Mullions Page in this section to order.
<b>Custom:</b>	PAK, leadlined, or special orders, contact customer service.

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

 <b>AIR LOUVERS</b>  <small>© 2023 Activar Construction Products Group, Inc.</small>	<b>Distributor:</b>	<b>Width:</b> <input type="text"/> x <b>Height:</b> <input type="text"/>
	<b>Architect:</b>	<b>Quantity:</b>
	<b>Contractor:</b>	<b>Specify Door &amp; Glass Thickness Above</b>
	<b>Project:</b>	<b>Date:</b> <input type="text"/> <b>Version:</b> 11/17/23
<b>800-554-6077    <a href="mailto:QUOTES@ACTIVARCPG.COM">QUOTES@ACTIVARCPG.COM</a>    <a href="mailto:ORDERS@ACTIVARCPG.COM">ORDERS@ACTIVARCPG.COM</a>    <a href="mailto:SALES@ACTIVARCPG.COM">SALES@ACTIVARCPG.COM</a></b> <b><a href="http://WWW.ACTIVARCPG.COM">WWW.ACTIVARCPG.COM</a></b> <b>MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: SEE WEBSITE FOR LOCATIONS</b>		