


Recommended for Applications Requiring Fire Rated, Safety, and or Insulated Glazing Up to 1" Thick

SPECIFICATIONS:

Material:	20 gauge CRS frame. Min Size 4" x 4", Max 60" x 104". See Fire Rating Below.
Construction:	1-1/4" trim with radius corners, mitered and welded. Continuous glass retainer, counter-sunk mounting holes in the bevel of the non-corridor side. Frame projects 3/8".
Fasteners:	#8 x 1" flathead phillips SMS to match finish.
Powder Coat Finishes:	<input type="checkbox"/> (B) Mineral Bronze (standard color) <input type="checkbox"/> (BK) Black <input type="checkbox"/> (FB) Flat Black <input type="checkbox"/> (W) White <input type="checkbox"/> (SB) SC Beige <input type="checkbox"/> (SI) Silver <input type="checkbox"/> (BA) Brass <input type="checkbox"/> (S) Sand <input type="checkbox"/> (G) Gray <input type="checkbox"/> (AB) AMS Beige View Colors Online
Door:	Specify Door Thickness: ____ Use this page for 1" to 1 ³ / ₄ " Doors. For Doors that are Thicker than 1 ³ / ₄ " - Use page 2. Door cutout = order size.
Door & Glazing Thickness**:	If door thickness minus glass thickness is greater than or equal to 3/4" use page 1 to order. If door thickness minus glass thickness is less than 3/4", use page 2 to order.
Glazing:	<p>Specify Glass Thickness: ____ Up to 1". See page 2 for glazing thicker than 1". See page 2 if door thickness minus glass thickness is less than 3/4"</p> <p>Visible light is 2" under rough opening size. Glass is 1" under order size. Glazing to be ordered separately from glazing submittals. If glazing is being provided by a supplier other than Air Louvers, coordinate with the supplier to ensure compatibility with this vision lite. Use fire-rated glazing with Intertek Warnock Hersey or UL classification markings for fire-rated applications.</p> <p>Compatible Air Louvers Glazing: <i>KERL*, KFRU*, CT60*, ARM1, WS, PYRO*, PPF, KERF*, *</i></p>
Fire-Rating, Testing & Listings:	When installed in properly rated and approved door, ratings up to 3 hours can be achieved, depending on the glazing used. See glazing ratings for maximum exposed area. Tested and Listed for UL10C and Criteria of UBC 7-2 Positive Pressure. VLFEZIG vision frames are UL listed and labeled unless WHI Listing selected below: <input type="checkbox"/> Optional Intertek Warnock Hersey listed and labeled

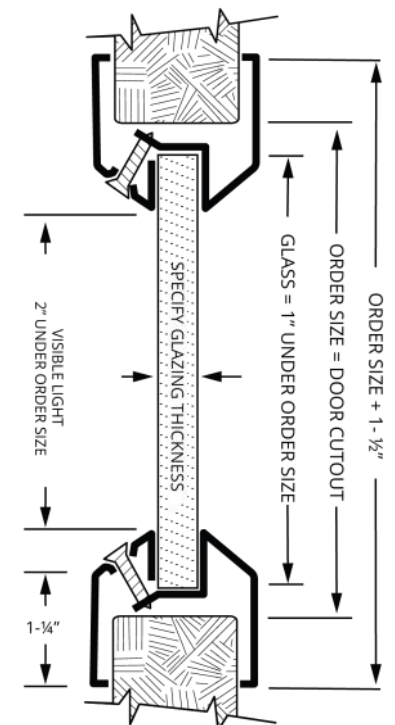


OPTIONS AT ADDITIONAL COST:



UL10C Installation:	<input type="checkbox"/> Additional intumescent tape for Positive Pressure UL10C . See detailed installation instructions.
Finishes & Materials:	<input type="checkbox"/> (S) 20 Gauge Stainless Steel: #4 Finish. <input type="checkbox"/> (G) Galvanneal <input type="checkbox"/> (E) Zinc Plated
Fasteners:	<input type="checkbox"/> Torx Screws <input type="checkbox"/> Other Fasteners: _____
Mullions:	Factory welded to vision lite & painted. See Mullions Page in this section to order.
Custom:	PAK, leadlined, or special orders, contact customer service.

* These glazing products have been discontinued by the manufacturer. Contact us regarding a replacement product.



Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

 <p>AIR LOUVERS</p> <p>© 2025 Activar Construction Products Group, Inc.</p>	Distributor: _____	Width: ____ x Height: ____
	Architect: _____	Quantity: _____
	Contractor: _____	Specify Door & Glass Thickness Above
	Project: _____	Date: _____ Version: 1/9/2025
<p>800-554-6077 QUOTES@ACTIVARCPG.COM ORDERS@ACTIVARCPG.COM SALES@ACTIVARCPG.COM</p> <p>WWW.ACTIVARCPG.COM</p> <p>MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: SEE WEBSITE FOR LOCATIONS</p>		

Recommended for Applications Requiring Fire Rated, Safety, and or Insulated Glazing up to 1-11/16"

SPECIFICATIONS:

Material:	20 gauge CRS frame. Min Size 4" x 4", Max 60" x 104". See Fire Rating Below.
Construction:	1-1/4" trim with radius corners, mitered and welded. Continuous glass retainer, countersunk mounting holes in the face of the non-corridor side.
Fasteners:	#8 x 1" flathead phillips SMS to match finish.
Powder Coat Finishes:	<input type="checkbox"/> (B) Mineral Bronze (standard color) <input type="checkbox"/> (BK) Black <input type="checkbox"/> (FB) Flat Black <input type="checkbox"/> (W) White <input type="checkbox"/> (SB) SC Beige <input type="checkbox"/> (SI) Silver <input type="checkbox"/> (BA) Brass <input type="checkbox"/> (S) Sand <input type="checkbox"/> (G) Gray <input type="checkbox"/> (AB) AMS Beige View Colors Online
Door:	Specify Door Thickness: <input type="checkbox"/> 1 3/4" to 3". For Doors that are 1 to 1-3/4" in thickness, use page 1. Door cutout = order size.
Door & Glazing Thickness**:	If door thickness minus glass thickness is greater than or equal to 3/4" use page 1 to order. If door thickness minus glass thickness is less than 3/4", use page 2 to order.
Glass:	<p>Specify Glass Thickness: <input type="checkbox"/> Up to 1-11/16". Visible light is 2" under rough opening size. Glass is 1" under order size.</p> <p>Glazing to be ordered separately from glazing submittals. If glazing is being provided by a supplier other than Air Louvers, coordinate with the supplier to ensure compatibility with this vision lite. Use fire-rated glazing with Intertek Warnock Hersey or UL classification markings for fire-rated applications</p> <p>Compatible Air Louvers Glazing: KFRL*, KFRU*, CT60*, ARM1, ARM2, ARM3, WS, PYRO*, PPF, KFRF*</p>
Fire-Rating, Testing & Listings:	When installed in properly rated and approved door, ratings up to 3 hours can be achieved, depending on the glazing used. See glazing ratings for maximum exposed area. Tested and Listed for UL 10C and Criteria of UBC 7-2 Positive Pressure. VLFEZIG vision frames are UL listed and labeled unless WHI Listing selected below: <input type="checkbox"/> Optional Intertek Warnock Hersey listed and labeled

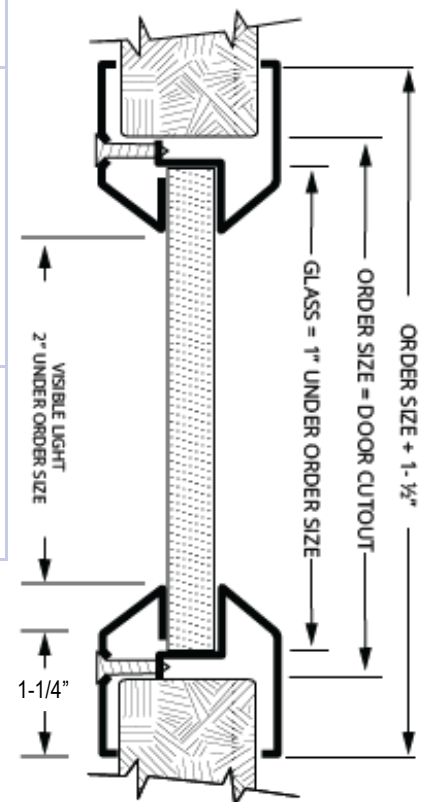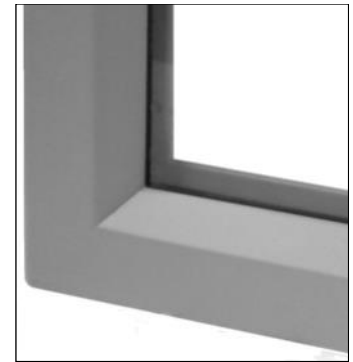


* These glazing products have been discontinued by the manufacturer. Contact us regarding a replacement product.

OPTIONS AT ADDITIONAL COST:



UL10C Installation:	<input type="checkbox"/> Additional intumescent tape for Positive Pressure UL10C . See detailed installation instructions.
Finishes & Materials:	<input type="checkbox"/> (S) 20 Gauge Stainless Steel: #4 Finish. <input type="checkbox"/> (G) Galvanneal <input type="checkbox"/> (E) Zinc Plated
Fasteners:	<input type="checkbox"/> Torx Screws <input type="checkbox"/> Other Fasteners: _____
Mullions:	Factory welded to vision lite & painted. See Mullions Page in this section to order.
Custom:	PAK, leadlined, or special orders, contact customer service.

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

 <p>AIR LOUVERS</p> <p><small>© 2025 Activar Construction Products Group, Inc.</small></p>	Distributor:	Width: _____ x Height: _____
	Architect:	Quantity:
	Contractor:	Specify Door & Glass Thickness Above
	Project:	Date: _____ Version: 1/9/2025
<p>800-554-6077 QUOTES@ACTIVARCPG.COM ORDERS@ACTIVARCPG.COM SALES@ACTIVARCPG.COM</p> <p>WWW.ACTIVARCPG.COM</p> <p>MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: SEE WEBSITE FOR LOCATIONS</p>		