





HURRICANE & HIGH WIND VELOCITY PAK: VLFIGHRC PAK™

Recommended for Applications Requiring Safety From Wind-Borne Debris.
Includes Tested and Approved, Glazing Components as Listed Below.

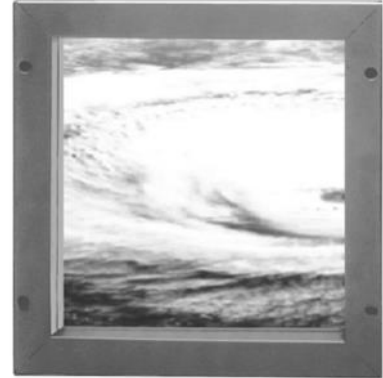

SPECIFICATIONS:

| | |
|------------------------------|---|
| Material: | 18 gauge galvalume steel frame. Minimum size 3-1/4" width or height and 12-3/8" diagonal. Maximum size 30" x 60-1/2". |
| Construction: | 1-1/2" trim with mitered and welded corners, square return and countersunk mounting holes on both sides. |
| Sealing: | <p>Between Frame & Glass: Sponge rubber, EPDM, neoprene press-on glazing tape 1/8" x 3/8". Dow Corning #995 (or equal) silicone structural glazing sealant applied per Dow Corning instructions.</p> <p>Between Door & Frame Perimeter: Closed cell EPDM press-on glazing tape 1/4" x 3/8" applied to inside face of lite kit frame.</p> <p>Screw Entry Points: Neoprene "O"-Ring, 7/32" and 5/32" I.D. with 1/16" wall, are provided to be used at each screw head.</p> <p>Setting Blocks to Suit: EPDM or neoprene setting blocks 1/16" minimum thickness at quarter points of bottom of glass and elsewhere as needed.</p> |
| Powder Coat Finishes: | <p>____ (B) Mineral Bronze (standard color)</p> <p>____ (BK) Black ____ (FB) Flat Black ____ (W) White</p> <p>____ (SB) SC Beige ____ (SI) Silver ____ (BA) Brass</p> <p>____ (S) Sand ____ (AB) AMS Beige ____ (G) Gray</p> <p>View Colors Online</p> |
| Door: | For 1-3/4" door. Door cutout = order size. |
| Fasteners: | #8 x 32 Phillips head thru bolts with blank head one side to match finish. |
| Glass: | Glass in Included with Each Unit: Glass 5/16" thick configuration; (2) 1/8" heat-strengthened glass lites separated by 0.075" interlayer. |

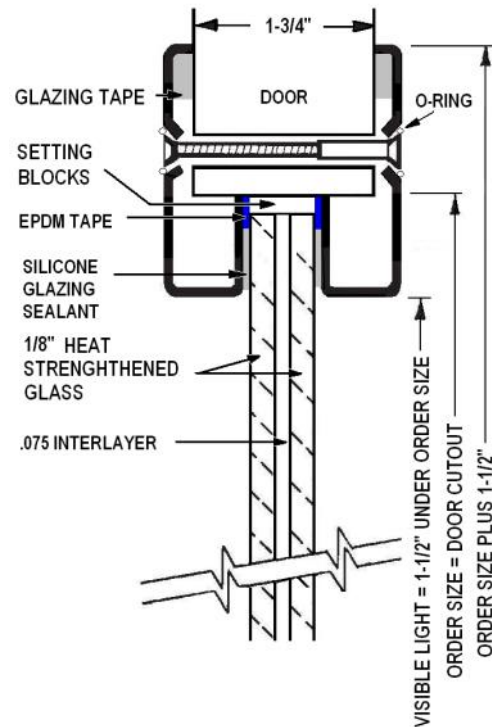

HURRICANE RATING


Severe Windstorm Testing:

Intertek Warnock Hersey listed and labeled to ASTM E330, E1886, E1996, ANSI 250.13
Design pressure +/-70 psf, Impact resistance 350-ft-lbs, Missile D, Wind zone 4

Florida Product Approval
File #FL 13187



Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

| | | |
|---|---------------------|---|
|  <p>AIR LOUVERS</p> <p>© 2023 Activar Construction Products Group, Inc.</p> | Distributor: | Width: ____ x Height: ____ |
| | Architect: | Quantity: |
| | Contractor: | |
| | Project: | Date: ____ Version: 9/20/2023 |
| <p>800-554-6077 QUOTES@ACTIVARCPG.COM ORDERS@ACTIVARCPG.COM SALES@ACTIVARCPG.COM</p> <p>WWW.ACTIVARCPG.COM</p> <p>MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: SEE WEBSITE FOR LOCATIONS</p> | | |