

# VISION FRAME WITH 12 GAUGE SECURITY GRILLES: VLFSG™

## Security Vision Frame With Security Grille Each Side of Glass

### SPECIFICATIONS:


<b>Material:</b>	18 gauge CRS frame. Min size 4" x 4", Max 60" x 72". See Fire Rating Below.
<b>Grille:</b>	12 gauge CRS with 13/16" square openings.
<b>Construction:</b>	Mitered and welded corners, countersunk mounting holes both sides, security grille welded to frame.
<b>Powder Coat Finishes:</b>	____ (B) Mineral Bronze (standard color) ____ (BK) Black ____ (FB) Flat Black ____ (W) White ____ (SB) SC Beige ____ (SI) Silver ____ (BA) Brass ____ (S) Sand ____ (AB) AMS Beige ____ (G) Gray <a href="#">View Colors Online</a>
<b>Door:</b>	For 1-3/4" door. Door cutout = order size.
<b>Fasteners:</b>	#8 x 32 Phillips head thru bolts with blank head one side to match finish.
<b>Glass:</b>	3/16" - 1/4" glazing to be ordered separately from glazing submittals. <b>Visible light is 1" under rough opening size. Glass is 1/4" under order size.</b> Use fire rated glazing with Warnock Hersey or UL classification markings for fire rated applications. <b>Compatible Fire-Rated Air Louvers Glazing: WS, KFRF, PPF</b>
<b>Fire-Rating, Testing &amp; Listings:</b>	When installed in properly rated and approved door, ratings up to 90 minutes can be achieved, depending on the glazing used. See glazing ratings for max exposed area. Tested and Listed for UL 10C and Criteria of UBC 7-2 Positive Pressure. See detailed installation instructions.

### OPTIONS AT ADDITIONAL COST:

<b>UBC 7-2 Installation:</b>	____ Additional intumescent tape for <b>Positive Pressure UL10C</b> . See detailed installation instructions.
<b>Finishes &amp; Materials:</b>	____ (G) Galvanneal ____ (E) Zinc Plated
<b>Fasteners:</b>	____ Torx ____ Other: _____
<b>Privacy Screen:</b>	Add the Velo Privacy Screen to This Vision Lite— <a href="#">See Web Page for Details</a>
<b>Custom:</b>	PAK, leadlined or special orders—contact customer service.



VLFSG

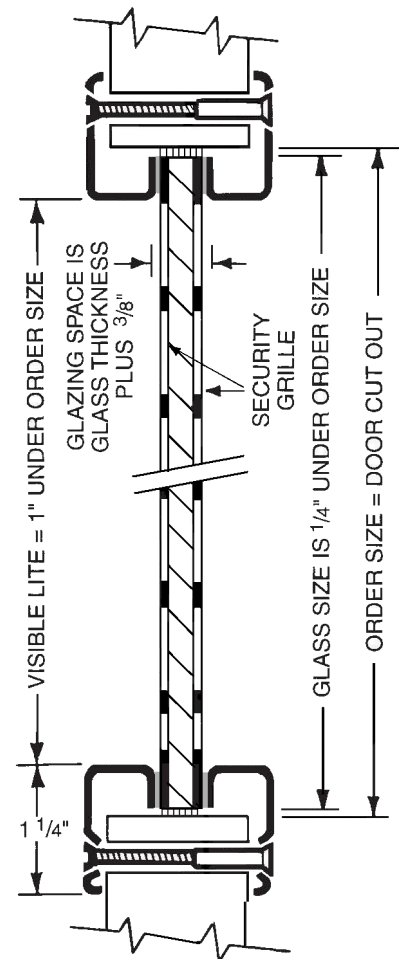

Order Format: VLFSG

Option G,E W H Color

Example: VLFSG 1212 W

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

 CONSTRUCTION PRODUCTS GROUP INC.	<b>Distributor:</b>	<b>Width:</b> ____ <b>x Height:</b> ____	
	<b>Architect:</b>	<b>Quantity:</b>	
	<b>Contractor:</b>	<b>Model:</b>	
	<b>Project:</b>	<b>Date:</b>	<b>Version:</b> 3/16/21
© 2021 Activar Construction Products Group, Inc.			
800-554-6077 <a href="mailto:QUOTES@ACTIVARCPG.COM">QUOTES@ACTIVARCPG.COM</a> <a href="mailto:ORDERS@ACTIVARCPG.COM">ORDERS@ACTIVARCPG.COM</a> <a href="mailto:SALES@ACTIVARCPG.COM">SALES@ACTIVARCPG.COM</a> VISIT <a href="http://WWW.ACTIVARCPG.COM">WWW.ACTIVARCPG.COM</a> FOR THE MOST UPDATED PRODUCT INFORMATION BEFORE ORDERING MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: SEE WEBSITE FOR LOCATIONS			