


SLIMLINE™ VISION KITS FOR 3/16-1/4" GLASS: VSL

Low Profile Beveled Vision Lite For Fire Rated Doors. Self-Attaching for Glass 3/16" to 1/4"
Frame Has Single-side Fasteners.

SPECIFICATIONS:

Material:	20 gauge CRS frame. Min Size 4" x 4", Max 60" x 104". See Fire Rating Below.
Construction:	1-1/4" trim with radius corners, mitered and welded. Continuous glass retainer, countersunk mounting holes in the bevel on non-corridor side.
Door:	For 1-3/4" door. Door cutout = order size.
Fasteners:	# 8 x 1" flathead phillips SMS to match finish.
Powder Coat Finishes:	(B) Mineral Bronze
Glass:	3/16"- 1/4" glazing to be ordered separately from glazing submittals. Visible light is 2" under rough opening size. Glass size is 1" under order size. Use fire rated glazing with Intertek Warnock Hersey (WHI) or UL classification markings for fire rated applications. Fire-Rated Air Louvers Glazing to fit this Product: WS and PPF.
Fire-Rating, Testing & Listings:	When installed in properly rated and approved door, ratings up to 3 hours can be achieved for VSL depending on the glazing used . See glazing ratings for max exposed area. Tested and Listed for UL10C and Criteria of UBC 7-2 Positive Pressure. See detailed installation instructions.

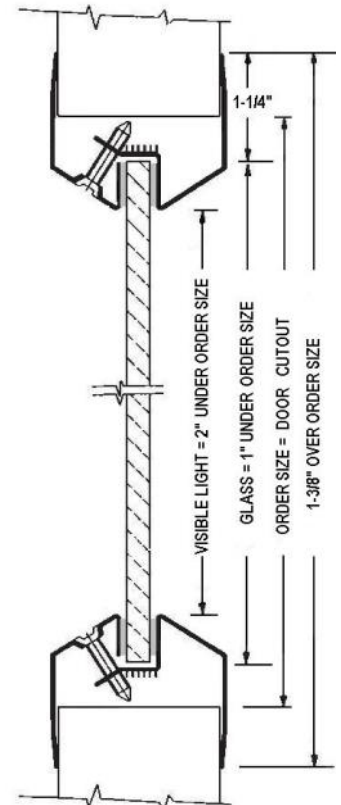

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

 AIR LOUVERS <small>© 2025 Activar Construction Products Group, Inc.</small>	Distributor:	Width: _____ x Height: _____	
	Architect:	Quantity:	
	Contractor:	Model:	
	Project:	Date:	Version: 11/17/23
800-554-6077 QUOTES@ACTIVARCPG.COM ORDERS@ACTIVARCPG.COM SALES@ACTIVARCPG.COM WWW.ACTIVARCPG.COM MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: SEE WEBSITE FOR LOCATIONS			