


UP TO 3 HOURS

VISION LITE - SLIMLINE™ SERIES WOODLITE - VWLH

Low profile Slimline™ vision Woodlite vision lites mount flush to the door providing a clean aesthetic look. Woodlites™ include a beautiful wood veneer finish. VWLH models are for standard door and glazing thicknesses

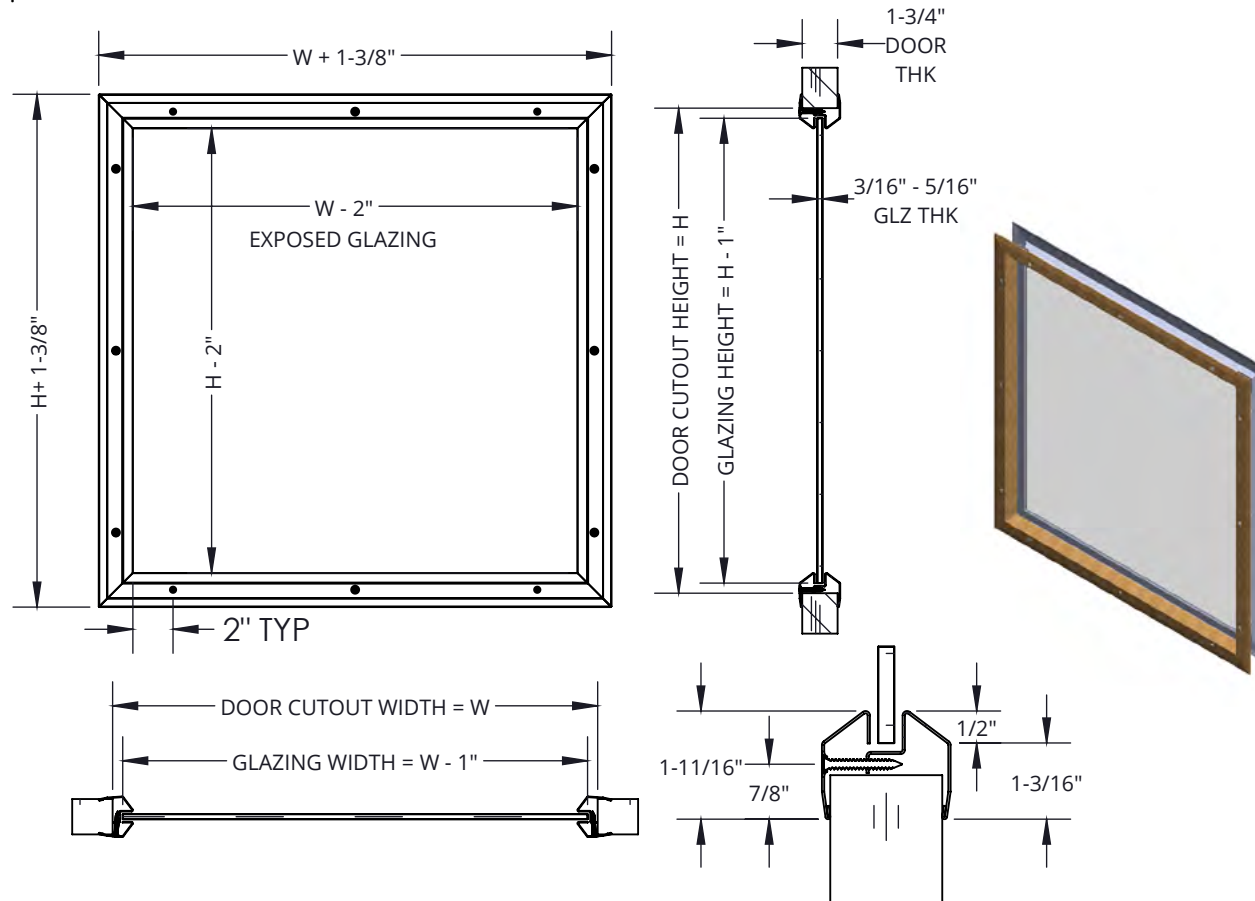

SPECIFICATIONS:

Application:

For standard door thickness $1\frac{3}{4}"$ and standard glazing thickness $3/16" - 5/16"$.

For standard door thickness $1\frac{3}{4}"$ and non-standard glazing thickness of $3/8" - 1\frac{11}{16}"$ see VWLIG.

For non-standard door thickness $1" - 3"$ and non-standard glazing thickness of $3/16" - 1\frac{11}{16}"$ see VWLIG.

Frame Material: 20 gauge cold rolled steel

Standard Finish: Gray powder coat with .010 wood veneer, select from standard options

Fasteners: #8 x $1\frac{1}{4}"$ Flathead Phillips screws to match finish
Size:

Minimum: 4" x 4"

Maximum: Maximum size fire-rating is determined by glass listing (for doors) and door manufacturer's listing
Door Cutout = Order Size (W x H)

Glazing Size = Order Size minus 1" (W - 1" x H - 1")

Exposed Glazing = Order Size minus 2" (W - 2" x H - 2")

FIRE RATINGS:

UL listed and labeled/stamped to ANSI/UL 10B, ANSI/UL 10C and CAN/ULC S104 when properly installed in rated and approved door. Ratings up to 180 minutes can be achieved depending on exposed glazing size and area.

OPTIONS:

PAKs: Vision lite, glazing & glazing tape combined

Compatible Air Louvers Glazing:

Fire-Rated: PPF, FL, FLP, FGL, WS

Non-Rated: TEMP

Other: Torx screws

TAPE WHEN SOLD SEPARATELY

| Qty | Model | Description Dimensions |
|-----|-------------------|---|
| | GTAPE 200B | Standard glazing tape $1/16"$ $1/16"$ thick x $3/8"$ wide x 200 ft |
| | FGS3000S90 | Intumescent tape for wired glass $5/64"$ thick x $7/16"$ wide x 16 ft |

Refer to glazing tape submittal for more information

Interpretation of fire and building codes may vary.

Consult with the local authority having jurisdiction (AHJ) to determine appropriate standards.



AIR LOUVERS

800-554-6077

sales@activarcpg.com

www.activarcpg.com

9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide

Distributor:

Contractor:

Date:

Scale: N/A

Pages: 1 of 2

Project:

Approved By:

Architect:

Item #:



VWLH-1212ROR

MADE-TO-ORDER SLIMLINE™ WOODLITE VISION LITES - EXAMPLE: VWLH-2234MA

| QTY | MODEL | - | WIDTH | HEIGHT | WOOD VENEER OPTIONS | | PAK GLAZING OPTIONS | | OPTIONS | |
|-----|-------|---|-------|--------|---------------------|---------------------------------|---------------------|-----------|-------------------------|---------------|
| | VWLH | | | | MA | White Maple | | None | | None |
| | | | | | WB | White Birch | | FL PAK | 3/16" Firelite NT | -T Torx Screw |
| | | | | | CH | Cherry | | PPF PAK | 3/16" Pyran Platinum F | |
| | | | | | VGF | Fir Vertical Grain | | FGL PAK | 1/4" Fireglass 20 | |
| | | | | | MAR | Mahogany African Ribbon Striped | | TEMP PAK | 1/4" Non-Rated Tempered | |
| | | | | | RO | Red Oak | | WS PAK | 1/4" Wireshield | |
| | | | | | ROR | Red Oak Rift | | FLP PAK | 5/16" Firelite Plus | |
| | | | | | WN | Walnut | | Other PAK | - specify below: | |
| | | | | | | | | | | |