

SUBMITTAL: DOUBLE LEAF SMOKE VENT - UFV™ WITH POLYISO INSULATION

Polyisocyanurate Insulation has the Highest R-Value for Insulating Products Like Roof Accessories. Help to Maintain Your Building's Envelope by Selecting Polyiso Insulation - 2" polyiso has an R-value of 11.4.

Certifications: UL Listed # ZBDZ.R16688. Tested to meet ANSI/UL793 standard for "automatically-operated roof vents". The smoke vents are equipped with a UL listed 165° F fusible link for automatic operation. The fusible link can be quickly and easily replaced.

Sizes: Only sizes from 48" x 48" up to 48" x 96" are UL listed. **Roof Opening size is order size.**

Insulation: The lid has 2" polyiso insulation in the space between the exterior cover and liner. The curb has 2" polyiso insulation.

Construction: Covers are 11 gauge aluminum, curb and curb frame are 14 gauge galvanized steel, fully welded and ground smooth, gasketed with a continuous bulb gasket, and insulated for weather tightness.

Operation: Torsion spring drives open the covers automatically. Shock absorbers control the speed of the leaves as they open.

Hardware: Heavy gauge aluminum 3/16" pivot hinges. Pull handles are provided for exterior or interior manual operation.

Finish: 2 coats prime coat.

Wind/Live Load & Uplift: Covers shall open against 10 psf (49 kg/m²) snow/wind load. Vent assembly rated for 40 psf (195 kg/m²) live load. Covers will remain closed under 90 psf (438 kg/m²) wind uplift force.


Options at Additional Cost:

- McCabe Link 24 ga galvanized outer curb liner Security Grille to Fit Opening
- 370° UL Listed Fuse Link (replaces 165° fuse link) Optional color Gray Bronze White



Domed Lid: See separate submittal

Custom Sizes & Finishes Available - Contact Customer Service

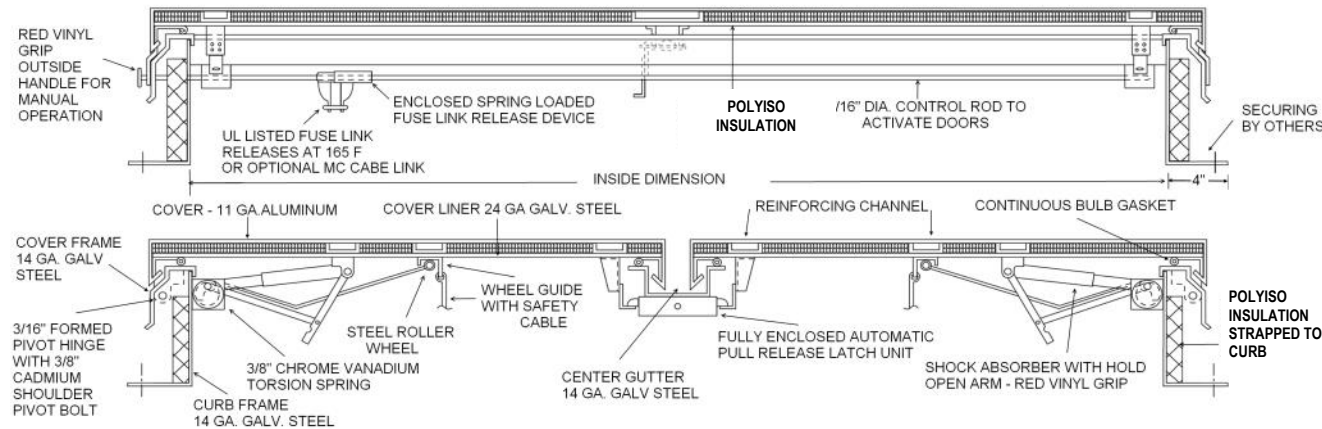

QTY	MODEL	ROOF OPENING Width x Length (hinge side)
	UFV-1	48" x 48"
	UFV-2	48" x 72"
	UFV-3	48" x 90"
	UFV-4	48" x 96"
	UFV-5	60" x 60" (not UL listed)
	UFV-6	60" x 96" (not UL listed)
Other Sizes Available Upon Request		

<p>ACTIVAR INC. CONSTRUCTION PRODUCTS GROUP</p> <p>UFV™ IS A TRADEMARK OF ACTIVAR DOWNLOAD CURRENT SUBMITTAL BEFORE ORDERING</p>	Distributor:	Quantity:
	Contractor:	Approved By:
	Model #:	Architect:
	Project:	Date:

HEADQUARTERS/JL INDUSTRIES: 9702 NEWTON AV S, BLOOMINGTON, MN 55431 PH: 800-554-6077 FAX: 952-835-2218 EMAIL: SALES@ACTIVARCPG.COM WWW.ACTIVARCPG.COM
ACPG WEST COAST/SAMSON: COMMERCE, CA • WARE HOUSES: FT MYERS FL, ATLANTA GA, DALLAS TX, SEATTLE WA, LANCASTER PA, FARGO ND, OMAHA NE 4/11/2016