


FIRE PROTECTION CABINET - FIRE EXTINGUISHER, VALVE, HOSE, & COMBINATION CABINETS:  
CROWLINE™ SERIES - Aluminum

Crowline cabinets provide protection and accessibility for critical fire department connections including valves and hoses. The product offering includes; fire department valve cabinets, fire hose cabinets and combinatin cabinets. Combinations include both hoses and valves or a hose or valve in combination with a fire extinguisher.

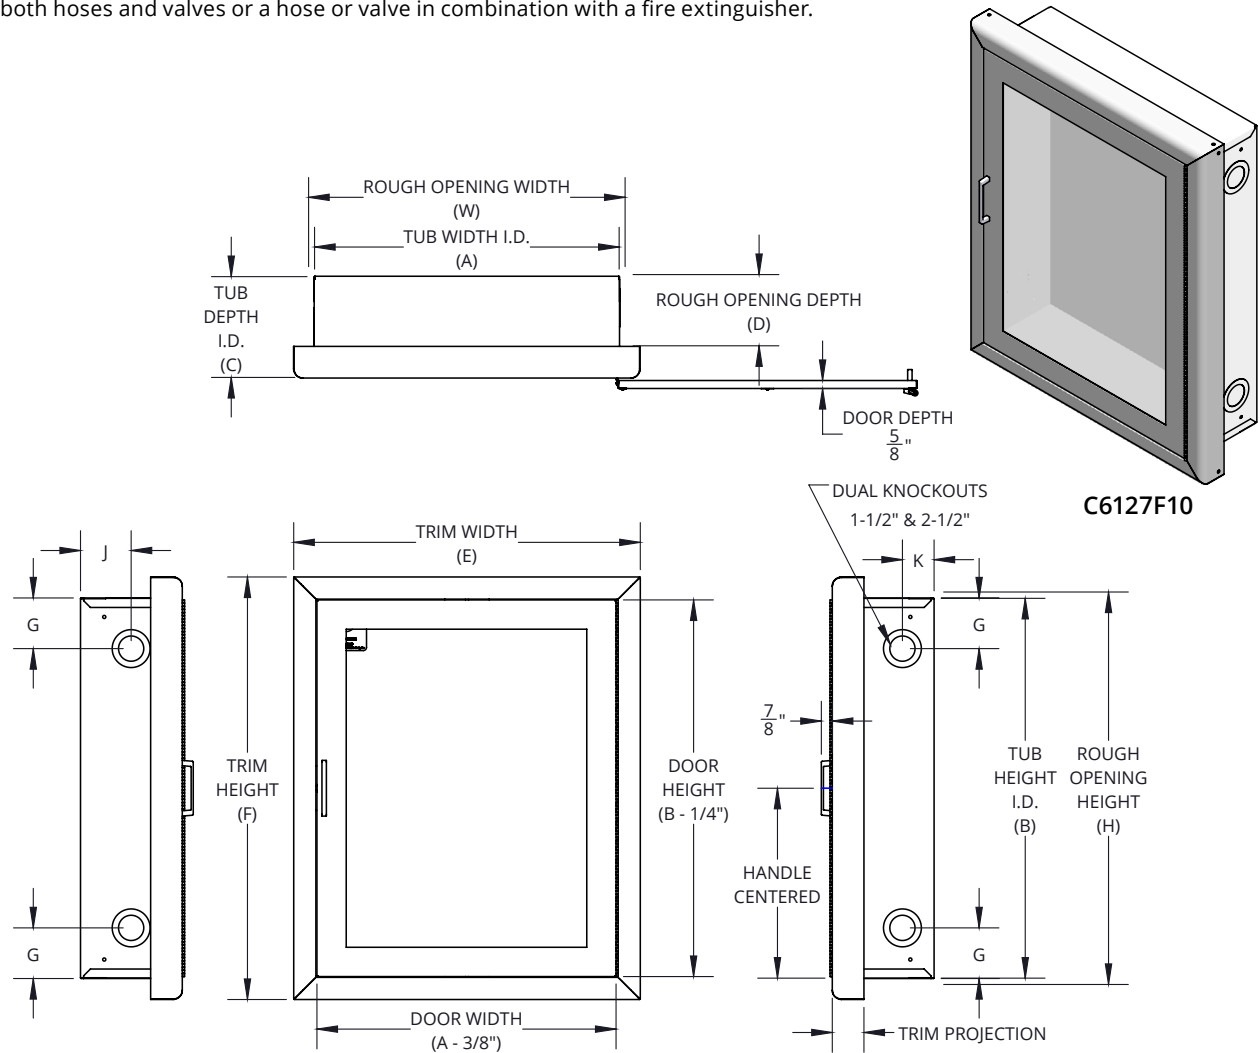

SPECIFICATIONS:

**Tub Material & Finish:**

Recessed & semi-recessed: Steel white powder coat  
Surface mount: Same material as door & trim

**Knockouts:** Hose and valve cabinets include dual knockouts for 1-1/2" and 2-1/2" diameter pipe located each side of tub, except for surface-mount and fire-rated, that are by others during installation

**Trim Material & Finish:** Aluminum clear anodized  
**Trim Projection:** 3/8" Flat square, 1-1/2" square, 2-1/2" rolled, surface-mount square

**Door Material & Finish:** Aluminum clear anodized

**Door Style:** Full view

**Glazing:** .090" Clear acrylic

**Hinge:** Continuous hinge, zinc-plated steel, opens to 180°

**Hardware:** Zinc plated pull handle with roller catch or cylinder Saf-T-Lok™

**ADA Compliance:** Cabinet cannot protrude more than 4" and the handle cannot be mounted more than 48" above finished floor. Surface-mount and 4-1/2" trim style do not comply with ADA.

**OPTIONS:**

**Tub:** Aluminum

**Door:** Vertical duo, solid, horizontal duo

**Glazing:** 1/8" clear tempered, 1/4" clear wired glass, 1/8" bronze acrylic, 1/8" gray acrylic, 1/4" clear laminated safety glass

**Handles:** Recessed handle

**Alarms:** Commander alarm, brigadier alarm, strobe alarm

**Material:** Dark bronze anodized

**Finish:** Red, black, other powder coat colors

**Lettering:** Silkscreen, engraving, etching

**Other:** Shelf for 8000 series only

**ADDITIONAL ACCESSORIES (sold separately)**

Die cuts, decals, plastic signs

See supplemental submittals for more information on various options and accessories.

**ADA CABINET MOUNTING HEIGHT:**

Standard pull on G, E, W, L22 and B door styles with Saf-T-Lok are 3-1/2" higher than door center, so allow for that when mounting cabinet.

Standard Pull with no lock or flush pull are centered on door.

Interpretation of fire and building codes may vary. Consult with the local authority having jurisdiction (AHJ) to determine appropriate standards.



**JL INDUSTRIES**

9702 Newton Avenue S, Bloomington, MN 55431

800-554-6077

sales@activarcpg.com

www.activarcpg.com

Distributor:

Contractor:

Date:

Scale: N/A

Page 1 of 4

Project:

Approved By:

Architect:


Item#:

FIRE PROTECTION CABINET - FIRE EXTINGUISHER, VALVE, HOSE, & COMBINATION CABINETS: CROWNLINE™ SERIES - Aluminum

QTY	MODEL & TRIM		ADA	TUB I. D.			TRIM O. D.		WALL ROUGH OPENING*			KNOCKOUT LOCATIONS			WT	COMPATIBLE FIRE EQUIPMENT
	MODEL	TRIM PROJECTION	≤4"	WIDTH (A)	HEIGHT (B)	DEPTH (C)	WIDTH (E)	HEIGHT (F)	WIDTH (W)	HEIGHT (H)	DEPTH (D)	DEPTH L (J)	HEIGHT (G)	DEPTH R (K)	LBS	
COMBINATION HOSE & FIRE EXTINGUISHER CABINET																
	C6025	3/8" flat square	✓	24"	30"	6"	27-¾"	33-¾"	25"	31"	5-⅞"	2-½"	4"	2-½"	28	<b>Combination Hose &amp; FE:</b> KOs fit 1-½", Hose Rack Unit with 50' or 75' Hose (HRA:050B, 050CH, 075B, 075CH) & Cosmic 2.5lb or Galaxy 2.5lb - 5lb Extinguisher
	C6026	1-¼" square	✓	24"	30"	6"	27-¾"	33-¾"	25"	31"	4-⅞"	2-½"	4"	2-½"	30	
	C6027	2-½" rolled	✓	24"	30"	6"	27-¾"	33-¾"	25"	31"	4-¼"	--**	--**	--**	31	
	C6023	surface-mount square		27-⅞"	33-⅜ <sup>16</sup> "	6-½"	27-¾"	33-¾"	-	-	-	-	-	-	32	
	C6029	surface-mount rolled		27-⅞"	33-⅜ <sup>16</sup> "	6-½"	27-¾"	33-¾"	-	-	-	-	-	-	32	
	C6225	3/8" flat square	✓	24"	34-¾"	6"	27-¾"	38-⅞"	25"	35-¾"	5-⅞"	2-½"	4"	2-½"	28	<b>Combination Hose &amp; FE:</b> KOs fit 1-1/2" Hose Rack Unit - 100' Hose (HRA 100B, HRA100CH) & Cosmic 2.5lb or Galaxy 2.5lb - 5lb Extinguisher
	C6226	1-¼" square	✓	24"	34-¾"	6"	27-¾"	38-⅞"	25"	35-¾"	4-⅞"	2-½"	4"	2-½"	30	
	C6227	2-½" rolled	✓	24"	34-¾"	6"	27-¾"	38-⅞"	25"	35-¾"	4-¼"	--**	--**	--**	31	
	C6223	surface-mount square		27-⅞"	37-15 <sup>16</sup> / <sub>16</sub> "	6-½"	27-¾"	38-⅞"	-	-	-	-	-	-	32	
	C6229	surface-mount rolled		27-⅞"	37-15 <sup>16</sup> / <sub>16</sub> "	6-½"	27-¾"	38-⅞"	-	-	-	-	-	-	32	
	C6125	3/8" flat square	✓	24"	30"	8"	27-¾"	33-¾"	25"	31"	7-⅞"	4"	4"	2-½"	36	<b>Combination Hose &amp; FE:</b> KOs 1-1/2" & 2-1/2" Hose Rack Unit - 100' Hose (HRA 100B, HRA100CH) & 2.5lb or Galaxy 2.5lb - 5lb Extinguisher
	C6126	1-¼" square	✓	24"	30"	8"	27-¾"	33-¾"	25"	31"	6-⅞"	4"	4"	2-½"	37	
	C6127	2-½" rolled	✓	24"	30"	8"	27-¾"	33-¾"	25"	31"	6-¼"	4"	4"	2-½"	38	
	C6123	surface-mount square		27-⅞"	33-⅜ <sup>16</sup> "	8-½"	27-¾"	33-¾"	-	-	-	-	-	-	40	
	C6129	surface-mount rolled		27-⅞"	33-⅜ <sup>16</sup> "	8-½"	27-¾"	33-¾"	-	-	-	-	-	-	40	
FIRE HOSE CABINET																
	C6425	3/8" flat square	✓	24"	34-¾"	8"	27-¾"	38-⅞"	25"	35-¾"	7-⅞"	4"	4"	2-½"	36	<b>Hose:</b> KOs 1-1/2" & 2-1/2" Hose Rack Unit 100' Hose (HRA100B-2.5)
	C6426	1-¼" square	✓	24"	34-¾"	8"	27-¾"	38-⅞"	25"	35-¾"	6-⅞"	4"	4"	2-½"	37	
	C6427	2-½" rolled	✓	24"	34-¾"	8"	27-¾"	38-⅞"	25"	35-¾"	6-¼"	4"	4"	2-½"	38	
	C6423	surface-mount square		27-⅞"	37-15 <sup>16</sup> / <sub>16</sub> "	8-½"	27-¾"	38-⅞"	-	-	-	-	-	-	40	
	C6429	surface-mount rolled		27-⅞"	37-15 <sup>16</sup> / <sub>16</sub> "	8-½"	27-¾"	38-⅞"	-	-	-	-	-	-	40	
	C6625	3/8" flat square	✓	24"	38-¾"	8"	27-¾"	42-⅞"	25"	39-¾"	7-⅞"	4"	4"	2-½"	41	<b>Hose:</b> KOs 1-1/2" & 2-1/2" Hose Rack Unit 125' Hose (HRA125B-2.5)
	C6626	1-¼" square	✓	24"	38-¾"	8"	27-¾"	42-⅞"	25"	39-¾"	6-⅞"	4"	4"	2-½"	43	
	C6627	2-½" rolled	✓	24"	38-¾"	8"	27-¾"	42-⅞"	25"	39-¾"	6-¼"	4"	4"	2-½"	45	
	C6623	surface-mount square		27-⅞"	41-15 <sup>16</sup> / <sub>16</sub> "	8-½"	27-¾"	42-⅞"	-	-	-	-	-	-	50	
	C6629	surface-mount rolled		27-⅞"	41-15 <sup>16</sup> / <sub>16</sub> "	8-½"	27-¾"	42-⅞"	-	-	-	-	-	-	50	
COMBINATION HOSE & VALVE OR HOSE & FIRE EXTINGUISHER CABINET																
	C6325	3/8" flat square	✓	30"	30"	8"	33-¾"	33-¾"	31"	31"	7-⅞"	4"	4"	2-½"	39	<b>Hose &amp; Valve or Hose &amp; Extinguisher:</b> KOs 1-1/2" & 2-1/2", Hose Rack Unit 50' or 75' Hose & Valve or Hose Rack Unit 50' or 75' Hose & Cosmic or Galaxy Extinguisher
	C6326	1-¼" square	✓	30"	30"	8"	33-¾"	33-¾"	31"	31"	6-⅞"	4"	4"	2-½"	41	
	C6327	2-½" rolled	✓	30"	30"	8"	33-¾"	33-¾"	31"	31"	6-¼"	4"	4"	2-½"	44	
	C6323	surface-mount square		33-⅞"	33-⅜ <sup>16</sup> "	8-½"	33-¾"	33-¾"	-	-	-	-	-	-	48	
	C6329	surface-mount rolled		33-⅞"	33-⅜ <sup>16</sup> "	8-½"	33-¾"	33-¾"	-	-	-	-	-	-	48	
	C6525	3/8" flat square	✓	32-¾"	34-¾"	8"	36-⅞"	38-⅞"	33-¾"	35-¾"	7-⅞"	4"	4"	2-½"	46	<b>Hose &amp; Valve or Hose &amp; Extinguisher:</b> KOs 1-1/2" & 2-1/2", Hose Rack Unit 50' or 75' Hose & Valve or Hose Rack Unit 50' or 75' Hose & Cosmic or Galaxy Extinguisher
	C6526	1-¼" square	✓	32-¾"	34-¾"	8"	36-⅞"	38-⅞"	33-¾"	35-¾"	6-⅞"	4"	4"	2-½"	47	
	C6527	2-½" rolled	✓	32-¾"	34-¾"	8"	36-⅞"	38-⅞"	33-¾"	35-¾"	6-¼"	4"	4"	2-½"	50	
	C6523	surface-mount square		35-⅞"	37-15 <sup>16</sup> / <sub>16</sub> "	8-½"	36-⅞"	38-⅞"	-	-	-	-	-	-	54	
	C6529	surface-mount rolled		35-⅞"	37-15 <sup>16</sup> / <sub>16</sub> "	8-½"	36-⅞"	38-⅞"	-	-	-	-	-	-	54	
	C7225	3/8" flat square	✓	32-¾"	38-¾"	8"	36-⅞"	42-⅞"	33-¾"	39-¾"	7-⅞"	4"	4"	2-½"	48	<b>Hose &amp; Valve or Hose &amp; Extinguisher:</b> KOs 1-1/2" & 2-1/2" Hose Rack Unit 125' Hose & Valve or Hose Rack Unit 125' & Cosmic or Galaxy Extinguisher
	C7226	1-¼" square	✓	32-¾"	38-¾"	8"	36-⅞"	42-⅞"	33-¾"	39-¾"	6-⅞"	4"	4"	2-½"	51	
	C7227	2-½" rolled	✓	32-¾"	38-¾"	8"	36-⅞"	42-⅞"	33-¾"	39-¾"	6-¼"	4"	4"	2-½"	55	
	C7223	surface-mount square		35-⅞"	41-15 <sup>16</sup> / <sub>16</sub> "	8-½"	36-⅞"	42-⅞"	-	-	-	-	-	-	60	
	C7229	surface-mount rolled		35-⅞"	41-15 <sup>16</sup> / <sub>16</sub> "	8-½"	36-⅞"	42-⅞"	-	-	-	-	-	-	60	

--\*\* for 6" depth tubs with 2-1/2" rolled trim, knockouts by others during installation back or side of tub, as determined by field conditions.

\*Confirm wall rough opening depth prior to ordering

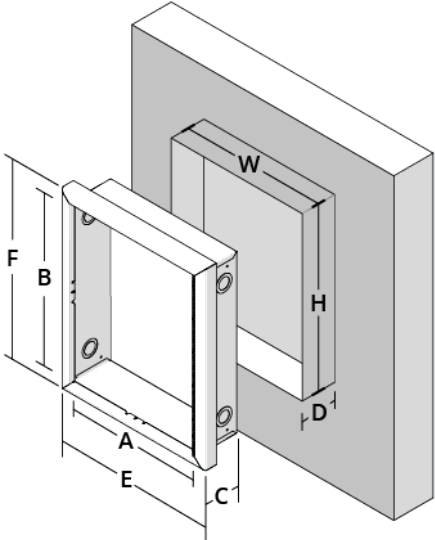

SQUARE TRIM STYLE & PROJECTION		
RECESSED	SEMI-RECESSED	SURFACE-MOUNT
5	6	3
3/8" Flat Square	1-¼" Square	5-½" to 8-½" Square


ROLLED TRIM STYLE & PROJECTION	
SEMI-RECESSED	SURFACE-MOUNT
7	9
2-½" or 3" Rolled	5-½" to 8-¼" Rolled

# FIRE PROTECTION CABINET - FIRE EXTINGUISHER, VALVE, HOSE, & COMBINATION CABINETS: CROWNLINE™ SERIES - Aluminum

QTY	MODEL & TRIM		ADA	TUB I. D.			TRIM O. D.		WALL ROUGH OPENING*			KNOCKOUT LOCATIONS			WT	COMPATIBLE FIRE EQUIPMENT
	MODEL	TRIM PROJECTION	≤4"	WIDTH (A)	HEIGHT (B)	DEPTH (C)	WIDTH (E)	HEIGHT (F)	WIDTH (W)	HEIGHT (H)	DEPTH (D)	DEPTH L (J)	HEIGHT (G)	DEPTH R (K)	LBS	
VALVE CABINET																
	C8525	3/8" flat square	✓	18"	18"	8"	21-3⁄8"	21-3⁄8"	19"	19"	7-7⁄8"	4"	9"	2-1⁄2"	22	Valve: KOs 1-1/2" & 2-1/2" 1 centered, each side of tub Fire Department Valve
	C8526	1-1⁄4" square	✓	18"	18"	8"	21-3⁄8"	21-3⁄8"	19"	19"	6-7⁄8"	4"	9"	2-1⁄2"	24	
	C8527	2-1⁄2" rolled	✓	18"	18"	8"	21-3⁄8"	21-3⁄8"	19"	19"	6-1⁄4"	4"	9"	2-1⁄2"	26	
	C8523	surface-mount square		21-1⁄8"	21-3⁄16"	8-1⁄2"	21-3⁄8"	21-3⁄8"	-	-	-	-	-	-	28	
	C8529	surface-mount rolled		21-1⁄8"	21-3⁄16"	8-1⁄2"	21-3⁄8"	21-3⁄8"	-	-	-	-	-	-	28	
	C8425	3/8" flat square	✓	18"	18"	10"	21-3⁄8"	21-3⁄8"	19"	19"	9-7⁄8"	5"	9"	5"	24	
	C8426	1-1⁄4" square	✓	18"	18"	10"	21-3⁄8"	21-3⁄8"	19"	19"	8-7⁄8"	5"	9"	5"	26	
	C8427	2-1⁄2" rolled	✓	18"	18"	10"	21-3⁄8"	21-3⁄8"	19"	19"	8-1⁄4"	5"	9"	5"	28	
	C8423	surface-mount square		21-1⁄8"	21-3⁄16"	10-1⁄2"	21-3⁄8"	21-3⁄8"	-	-	-	-	-	-	30	
	C8429	surface-mount rolled		21-1⁄8"	21-3⁄16"	10-1⁄2"	21-3⁄8"	21-3⁄8"	-	-	-	-	-	-	30	
COMBINATION DUAL SIDE-BY-SIDE VALVE & FIRE EXTINGUISHER CABINET or TWO VALVES CABINET																
	C8725	3/8" flat square	✓	26"	26"	8"	29-3⁄8"	29-3⁄8"	27"	27"	7-7⁄8"	4"	13"	2-1⁄2"	41	Dual side by side Valve & Extinguisher or 2 Valves: KOs 1-1/2" & 2-1/2" 1 centered, each side of tub Fire Department Valve & Cosmic or Galaxy 2½lb -10lb Fire Extinguisher or 2 Fire Department Valves
	C8726	1-1⁄4" square	✓	26"	26"	8"	29-3⁄8"	29-3⁄8"	27"	27"	6-7⁄8"	4"	13"	2-1⁄2"	41	
	C8727	2-1⁄2" rolled	✓	26"	26"	8"	29-3⁄8"	29-3⁄8"	27"	27"	6-1⁄4"	4"	13"	2-1⁄2"	43	
	C8723	surface-mount square		21-1⁄8"	29-3⁄16"	8-1⁄2"	29-3⁄8"	29-3⁄8"	-	-	-	-	-	-	45	
	C8729	surface-mount rolled		21-1⁄8"	29-3⁄16"	8-1⁄2"	29-3⁄8"	29-3⁄8"	-	-	-	-	-	-	45	
	C8625	3/8" flat square	✓	26"	26"	10"	29-3⁄8"	29-3⁄8"	27"	27"	9-7⁄8"	5"	13"	5"	43	
	C8626	1-1⁄4" square	✓	26"	26"	10"	29-3⁄8"	29-3⁄8"	27"	27"	8-7⁄8"	5"	13"	5"	43	
	C8627	2-1⁄2" rolled	✓	26"	26"	10"	29-3⁄8"	29-3⁄8"	27"	27"	8-1⁄4"	5"	13"	5"	45	
	C8623	surface-mount square		29-1⁄8"	29-3⁄16"	10-1⁄2"	29-3⁄8"	29-3⁄8"	-	-	-	-	-	-	47	
	C8629	surface-mount rolled		29-1⁄8"	29-3⁄16"	10-1⁄2"	29-3⁄8"	29-3⁄8"	-	-	-	-	-	-	47	
COMBINATION VALVE & FIRE EXTINGUISHER CABINET																
	C8025	3/8" flat square	✓	16"	40"	9"	19-3⁄8"	43-3⁄8"	17"	41"	8-7⁄8"	4-1⁄4"	4"	4-1⁄4"	35	Valve & Extinguisher: KOs 1-1/2" & 2-1/2" Fire Department Valve & Cosmic, Galaxy Fire Extinguisher, Mercury, Grenadier, Sentinel 5lb -10lb
	C8026	1-1⁄4" square	✓	16"	40"	9"	19-3⁄8"	43-3⁄8"	17"	41"	7-7⁄8"	4-1⁄4"	4"	4-1⁄4"	35	
	C8027	2-1⁄2" rolled	✓	16"	40"	9"	19-3⁄8"	43-3⁄8"	17"	41"	7-1⁄4"	4-1⁄4"	4"	4-1⁄4"	37	
	C8023	surface-mount square		19-1⁄8"	43-3⁄16"	9-1⁄2"	19-3⁄8"	43-3⁄8"	-	-	-	-	-	-	38	
	C8029	surface-mount rolled		19-1⁄8"	43-3⁄16"	9-1⁄2"	19-3⁄8"	43-3⁄8"	-	-	-	-	-	-	38	

--\*\* for 6" depth tubs with 2-1/2" rolled trim, knockouts by others during installation back or side of tub, as determined by field conditions.

\*Confirm wall rough opening depth prior to ordering

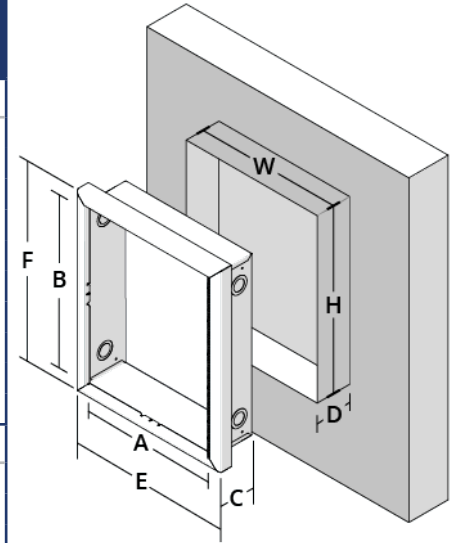

SQUARE TRIM STYLE & PROJECTION		
RECESSED	SEMI-RECESSED	SURFACE-MOUNT
5	6	3
3/8" Flat Square	1-1/4" Square	5-1/2" to 8-1/2" Square

ROLLED TRIM STYLE & PROJECTION	
SEMI-RECESSED	SURFACE-MOUNT
7	9
2-1/2" or 3" Rolled	5-1/2" to 8-1/4" Rolled

FIRE PROTECTION CABINET - FIRE EXTINGUISHER, VALVE, HOSE, & COMBINATION CABINETS: CROWNLINE™ SERIES - Aluminum

	SOLID	FULL VIEW	VERTICAL DUO	HORIZONTAL DUO	SMALL WINDOW	CENTER HORIZONTAL DUO
STANDARD PULL	S21	F	V	D	(Not available)	
STANDARD PULL & SAF-T-LOK	L22	G	W	E	B	A
NO HANDLE & SAF-T-LOK	L24					

MATERIAL OPTIONS		
MODEL	DESCRIPTION	
9	Dark bronze anodized aluminum (Pull to match)	

DOOR/LATCH STYLE			GLAZING/DOOR TYPE	
MODEL	DESCRIPTION		MODEL	DESCRIPTION
F	Full view		10	.09" Clear acrylic
G	Full view w SAF-T-LOK™		13	1/4" Clear wired glass
D	Horizontal duo		15	1/8" Bronze acrylic
E	Horizontal duo w SAF-T-LOK™		16	1/8" Gray acrylic
A	Center duo panel w SAF-T-LOK™		17	1/8" Clear tempered glass
V	Vertical duo		18	1/4" Clear safety glass
W	Vertical duo w SAF-T-LOK™		21	No glazing, no lock w pull (S21 only)
B	Small view window w SAF-T-LOK™		22	No glazing w SAF-T-LOK™ w pull (L22 only)
S	Solid (no glazing)		24	No glazing w SAF-T-LOK™ and no pull (L24 only)
L	Solid (no glazing) w SAF-T-LOK™			

HANDLE/LATCH OPTIONS (installed at an additional cost)		
MODEL	DESCRIPTION	
A	Recessed handle	
LH	Lever handle (not avail. with SAF-T-LOK™)	
FM	Futura "FIRE" Mill	
FR	Futura "FIRE" Red	
FW	Futura "FIRE" White	

ALARM OPTIONS (installed at an additional cost)		
MODEL	DESCRIPTION	
CA	Commander	
BA	Brigadier	
SA	Strobe	

FINISH OPTIONS		
MODEL	DESCRIPTION	
BK	Black door, trim, tub	
R	Red door, trim, tub	
	COLOR - OTHER (please specify)	
Door		
Trim		
Tub		

CUSTOM LETTERING OPTIONS (when manufactured at additional cost)		
MODEL	DESCRIPTION	
SS	Silkscreen	
ET	Etching on glass	
EN	Engraving on metal	
	LETTERING - OTHER (please specify)	
Other		

LETTERING (sold separately)

QTY	MODEL	"FIRE EXTINGUISHER" DESCRIPTION
	LDCVRF	DIE CUT, VERT, RED, 3/4" x 18"
	LDCVWF	DIE CUT, VERT, WHITE, 3/4" x 18"
	LDCVBFE	DIE CUT, VERT, BLACK, 3/4" x 18"
	LDVRF	DECAL, VERT, RED, 3/4" x 18"
	LDVBFE	DECAL, VERT, BLACK, 3/4" x 18"
	LDVWFE	DECAL, VERT, WHITE, 3/4" x 18"
	LDCVRF-ESM-A	DIE CUT, VERT, RED, (fits 81 tub), 3/4" x 14"
	LDCHRF-2	DIE CUT, HORZ, RED, 2" HIGH, 4-1/2" x 21"
	Other	

HANDLE/LATCH OPTIONS (sold separately)

QTY	MODEL	DESCRIPTION
	PUF	Futura "FIRE" Mill
	PUFR	Futura "FIRE" Red
	PUFW	Futura "FIRE" White
	PUCH	Chrome pull handle

PLASTIC SIGNS (sold separately)

QTY	MODEL	DESCRIPTION
	22S	FE, 3D ANGLE, 4" x 12"
	23S	FE, 3D TENT, 4" x 18"
	24S	FE, 3D TENT, 5" x 6"
	25S	FE, FLUSH, 4" x 12"

Refer to supplemental submittals for information on more options and accessories.

Refer to supplemental submittal for more options

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.