
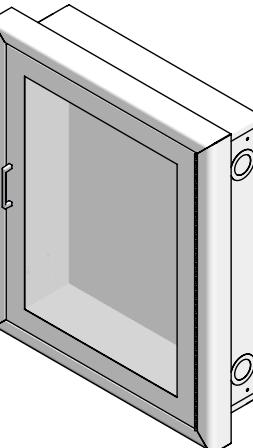


FIRE PROTECTION CABINET - FIRE EXTINGUISHER, VALVE, HOSE, & COMBINATION CABINETS:

CROWNLINE™ SERIES - Steel

Crownline cabinets provide protection and accessibility for critical fire department connections including valves and hoses. The product offering includes; fire department valve cabinets, fire hose cabinets and combination cabinets. Combinations include both hoses and valves or a hose or valve in combination with a fire extinguisher.

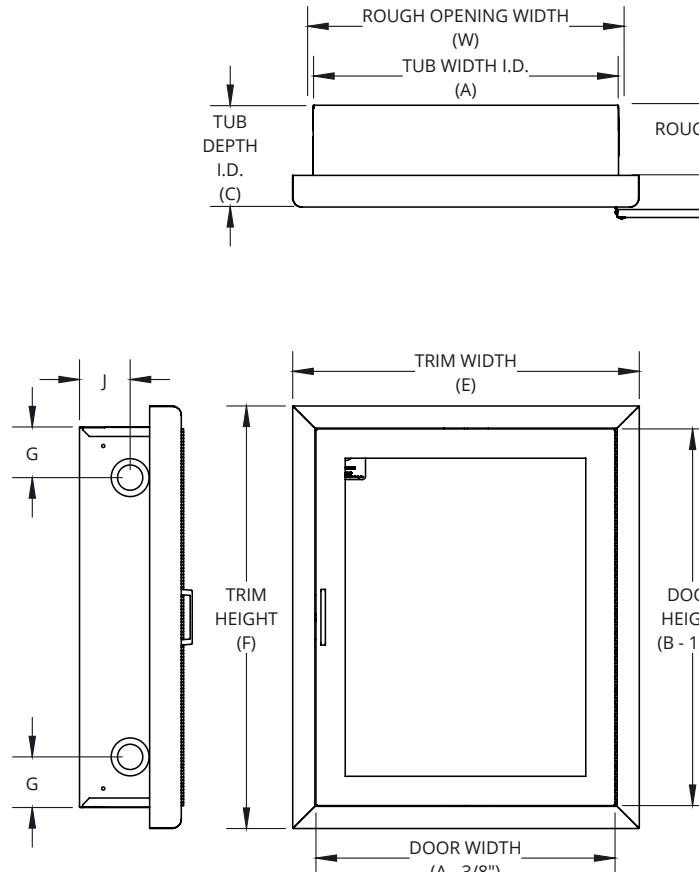

SPECIFICATIONS:

Tub Material & Finish: Steel white powder coat

Knockouts: Hose and valve cabinets include dual knockouts for 1-1/2" and 2-1/2" diameter pipe located each side of tub, except for surface-mount and fire-rated, that are by others during installation

Trim Material & Finish: Steel white powder coat

Trim Projection: 3/8" Flat square, 1-1/2" square, 2-1/2" rolled, surface-mount square

Door Material & Finish: Steel white powder coat

Door Style: Full view

Glazing: .090" Clear acrylic

Hinge: Continuous hinge, white powder coat cold rolled steel, opens to 180°

Hardware: Zinc plated pull handle with roller catch or cylinder Saf-T-Lok™

ADA Compliance: Cabinet cannot protrude more than 4" and the handle cannot be mounted more than 48" above finished floor. Surface-mount and 4-1/2" trim style do not comply with ADA.

OPTIONS:

Door: Vertical duo, solid, horizontal duo

Glazing: 1/8" clear tempered, 1/4" clear wired glass, 1/8" bronze acrylic, 1/8" gray acrylic, 1/4" clear laminated safety glass

Handles: Recessed handle, magnetic catch

Alarms: Commander alarm, brigadier alarm, strobe alarm

Material: Satin chrome, galvanneal

Finish: Red, black, other powder coat colors

Lettering: Silkscreen, engraving, etching

Other: Shelf for 8000 series only

ADDITIONAL ACCESSORIES (sold separately)

Die cuts, decals, plastic signs

See supplemental submittals for more information on various options and accessories.

ADA CABINET MOUNTING HEIGHT:

Standard pull on G, E, W, L22 and B door styles with Saf-T-Lok are 3-1/2" higher than door center, so allow for that when mounting cabinet.

Standard Pull with no lock or flush pull are centered on door.

Interpretation of fire and building codes may vary. Consult with the local authority having jurisdiction (AHJ) to determine appropriate standards.



JL INDUSTRIES

9702 Newton Avenue S, Bloomington, MN 55431

800-554-6077
sales@activarcpg.com
www.activarcpg.com



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION IS PROHIBITED.

Distributor:		Project:	
Contractor:		Approved By:	
Date:		Architect:	
Scale: N/A	Page 1 of 4	Item#:	

QTY	MODEL & TRIM		ADA	TUB I. D.		TRIM O. D.		WALL ROUGH OPENING*			KNOCKOUT LOCATIONS			WT	COMPATIBLE FIRE EQUIPMENT
	MODEL	TRIM PROJECTION	≤4"	WIDTH (A)	HEIGHT (B)	DEPTH (C)	WIDTH (E)	HEIGHT (F)	WIDTH (W)	HEIGHT (H)	DEPTH (D)	DEPTH L (J)	HEIGHT (G)	DEPTH R (K)	LBS
COMBINATION HOSE & FIRE EXTINGUISHER CABINET															
C6015	3/8" flat square	✓	24"	30"	6"	27-3/8"	33-3/8"	25"	31"	5-7/8"	2-1/2"	4"	2-1/2"	28	Combination Hose & FE: KOs fit 1-1/2", Hose Rack Unit with 50' or 75' Hose (HRA:050B, 050CH, 075B, 075CH) & Cosmic 2.5lb or Galaxy 2.5lb - 5lb Extinguisher
C6016	1-1/4" square	✓	24"	30"	6"	27-3/8"	33-3/8"	25"	31"	4-7/8"	2-1/2"	4"	2-1/2"	30	
C6017	2-1/2" rolled	✓	24"	30"	6"	27-3/8"	33-3/8"	25"	31"	3-5/8"	--**	--**	--**	31	
C6013	surface-mount square	27-1/8"	33-3/16"	6-1/2"	27-3/8"	33-3/8"	-	-	-	-	-	-	-	32	
C6019	surface-mount rolled	27-1/8"	33-3/16"	6-1/2"	27-3/8"	33-3/8"	-	-	-	-	-	-	-	32	
C6215	3/8" flat square	✓	24"	34-3/4"	6"	27-3/8"	38-1/8"	25"	35-3/4"	5-7/8"	2-1/2"	4"	2-1/2"	28	Combination Hose & FE: KOs fit 1-1/2" Hose Rack Unit - 100' Hose (HRA 100B, HRA100CH) & Cosmic 2.5lb or Galaxy 2.5lb - 5lb Extinguisher
C6216	1-1/4" square	✓	24"	34-3/4"	6"	27-3/8"	38-1/8"	25"	35-3/4"	4-7/8"	2-1/2"	4"	2-1/2"	30	
C6217	2-1/2" rolled	✓	24"	34-3/4"	6"	27-3/8"	38-1/8"	25"	35-3/4"	3-5/8"	--**	--**	--**	31	
C6213	surface-mount square	27-1/8"	37-15/16"	6-1/2"	27-3/8"	38-1/8"	-	-	-	-	-	-	-	32	
C6219	surface-mount rolled	27-1/8"	37-15/16"	6-1/2"	27-3/8"	38-1/8"	-	-	-	-	-	-	-	32	
C6115	3/8" flat square	✓	24"	30"	8"	27-3/8"	33-3/8"	25"	31"	7-7/8"	4"	4"	2-1/2"	36	Combination Hose & FE: KOs 1-1/2" & 2-1/2" Hose Rack Unit - 100' Hose (HRA 100B, HRA100CH) & 2.5lb or Galaxy 2.5lb - 5lb Extinguisher
C6116	1-1/4" square	✓	24"	30"	8"	27-3/8"	33-3/8"	25"	31"	6-7/8"	4"	4"	2-1/2"	37	
C6117	2-1/2" rolled	✓	24"	30"	8"	27-3/8"	33-3/8"	25"	31"	5-5/8"	4"	4"	2-1/2"	38	
C6113	surface-mount square	27-1/8"	33-3/16"	8-1/2"	27-3/8"	33-3/8"	-	-	-	-	-	-	-	40	
C6119	surface-mount rolled	27-1/8"	33-3/16"	8-1/2"	27-3/8"	33-3/8"	-	-	-	-	-	-	-	40	
FIRE HOSE CABINET															
C6415	3/8" flat square	✓	24"	34-3/4"	8"	27-3/8"	38-1/8"	25"	35-3/4"	7-7/8"	4"	4"	2-1/2"	36	Hose: KOs 1-1/2" & 2-1/2" Hose Rack Unit 100' Hose (HRA100B-2.5)
C6416	1-1/4" square	✓	24"	34-3/4"	8"	27-3/8"	38-1/8"	25"	35-3/4"	6-7/8"	4"	4"	2-1/2"	37	
C6417	2-1/2" rolled	✓	24"	34-3/4"	8"	27-3/8"	38-1/8"	25"	35-3/4"	5-5/8"	4"	4"	2-1/2"	38	
C6413	surface-mount square	27-3/16"	37-15/16"	8-1/2"	27-3/8"	38-1/8"	-	-	-	-	-	-	-	40	
C6419	surface-mount rolled	27-3/16"	37-15/16"	8-1/2"	27-3/8"	38-1/8"	-	-	-	-	-	-	-	40	
C6615	3/8" flat square	✓	24"	38-3/4"	8"	27-3/8"	42-1/8"	25"	39-3/4"	7-7/8"	4"	4"	2-1/2"	41	Hose: KOs 1-1/2" & 2-1/2" Hose Rack Unit 125' Hose (HRA125B-2.5)
C6616	1-1/4" square	✓	24"	38-3/4"	8"	27-3/8"	42-1/8"	25"	39-3/4"	6-7/8"	4"	4"	2-1/2"	43	
C6617	2-1/2" rolled	✓	24"	38-3/4"	8"	27-3/8"	42-1/8"	25"	39-3/4"	5-5/8"	4"	4"	2-1/2"	45	
C6613	surface-mount square	27-1/8"	41-15/16"	8-1/2"	27-3/8"	42-1/8"	-	-	-	-	-	-	-	50	
C6619	surface-mount rolled	27-1/8"	41-15/16"	8-1/2"	27-3/8"	42-1/8"	-	-	-	-	-	-	-	50	
COMBINATION HOSE & VALVE OR HOSE & FIRE EXTINGUISHER CABINET															
C6315	3/8" flat square	✓	30"	30"	8"	33-3/8"	33-3/8"	31"	31"	7-7/8"	4"	4"	2-1/2"	39	Hose & Valve or Hose & Extinguisher: KOs 1-1/2" & 2-1/2", Hose Rack Unit 50' or 75' Hose & Valve or Hose Rack Unit 50' or 75' Hose & Cosmic or Galaxy Extinguisher
C6316	1-1/4" square	✓	30"	30"	8"	33-3/8"	33-3/8"	31"	31"	6-7/8"	4"	4"	2-1/2"	41	
C6317	2-1/2" rolled	✓	30"	30"	8"	33-3/8"	33-3/8"	31"	31"	5-5/8"	4"	4"	2-1/2"	44	
C6313	surface-mount square	33-1/8"	33-3/16"	8-1/2"	33-3/8"	33-3/8"	-	-	-	-	-	-	-	48	
C6319	surface-mount rolled	33-1/8"	33-3/16"	8-1/2"	33-3/8"	33-3/8"	-	-	-	-	-	-	-	48	
C6515	3/8" flat square	✓	32-3/4"	34-3/4"	8"	36-1/8"	38-1/8"	33-3/4"	35-3/4"	7-7/8"	4"	4"	2-1/2"	46	Hose & Valve or Hose & Extinguisher: KOs 1-1/2" & 2-1/2", Hose Rack Unit 100' Hose & Valve or Hose Rack Unit 100' Hose & Valve or Hose Rack Unit 100' & Cosmic or Galaxy Extinguisher
C6516	1-1/4" square	✓	32-3/4"	34-3/4"	8"	36-1/8"	38-1/8"	33-3/4"	35-3/4"	6-7/8"	4"	4"	2-1/2"	47	
C6517	2-1/2" rolled	✓	32-3/4"	34-3/4"	8"	36-1/8"	38-1/8"	33-3/4"	35-3/4"	5-5/8"	4"	4"	2-1/2"	50	
C6513	surface-mount square	33-7/8"	37-15/16"	8-1/2"	36-1/8"	38-1/8"	-	-	-	-	-	-	-	54	
C6519	surface-mount rolled	33-7/8"	37-15/16"	8-1/2"	36-1/8"	38-1/8"	-	-	-	-	-	-	-	54	
C7215	3/8" flat square	✓	32-3/4"	38-3/4"	8"	36-1/8"	42-1/8"	33-3/4"	39-3/4"	7-7/8"	4"	4"	2-1/2"	48	Hose & Valve or Hose & Extinguisher: KOs 1-1/2" & 2-1/2" Hose Rack Unit 125' Hose & Valve or Hose Rack Unit 125' & Cosmic or Galaxy Extinguisher
C7216	1-1/4" square	✓	32-3/4"	38-3/4"	8"	36-1/8"	42-1/8"	33-3/4"	39-3/4"	6-7/8"	4"	4"	2-1/2"	51	
C7217	2-1/2" rolled	✓	32-3/4"	38-3/4"	8"	36-1/8"	42-1/8"	33-3/4"	39-3/4"	5-5/8"	4"	4"	2-1/2"	55	
C7213	surface-mount square	35-7/8"	41-15/16"	8-1/2"	36-1/8"	42-1/8"	-	-	-	-	-	-	-	60	
C7219	surface-mount rolled	35-7/8"	41-15/16"	8-1/2"	36-1/8"	42-1/8"	-	-	-	-	-	-	-	60	

--** for 6" depth tubs with 2-1/2" rolled trim, knockouts by others during installation back or side of tub, as determined by field conditions.

*Confirm wall rough opening depth prior to ordering

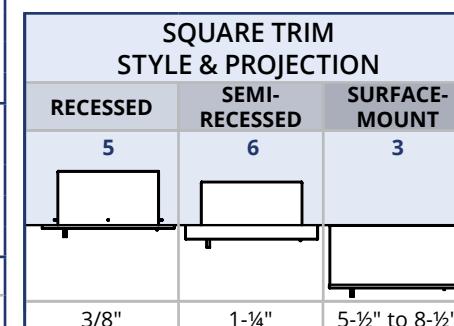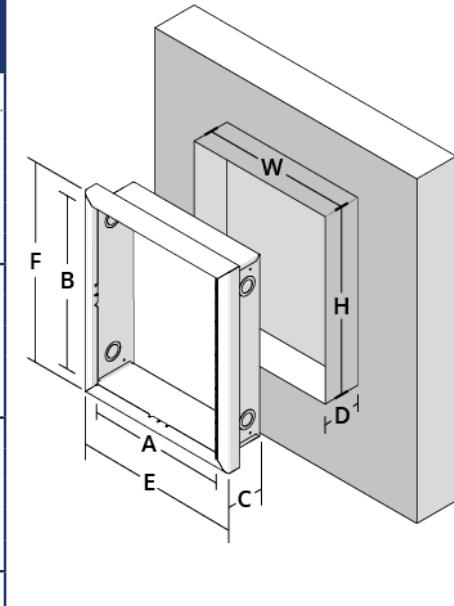


FIRE PROTECTION CABINET - FIRE EXTINGUISHER, VALVE, HOSE, & COMBINATION CABINETS: CROWNLINE™ SERIES - Steel

*Confirm wall rough opening depth prior to ordering

QTY	MODEL & TRIM		ADA	TUB I. D.			TRIM O. D.		WALL ROUGH OPENING*			KNOCKOUT LOCATIONS			WT	COMPATIBLE FIRE EQUIPMENT
	MODEL	TRIM PROJECTION		≤4"	WIDTH (A)	HEIGHT (B)	DEPTH (C)	WIDTH (E)	HEIGHT (F)	WIDTH (W)	HEIGHT (H)	DEPTH (D)	DEPTH L (I)	HEIGHT (G)	DEPTH R (K)	
VALVE CABINET																
	C8515	3/8" flat square	✓	18"	18"	8"	21-3/8"	21-3/8"	19"	19"	7-7/8"	4"	9"	2-1/2"	22	
	C8516	1-1/4" square	✓	18"	18"	8"	21-3/8"	21-3/8"	19"	19"	6-7/8"	4"	9"	2-1/2"	24	
	C8517	2-1/2" rolled	✓	18"	18"	8"	21-3/8"	21-3/8"	19"	19"	5-5/8"	4"	9"	2-1/2"	26	
	C8513	surface-mount square		21-1/8"	21-3/16"	8-1/2"	21-3/8"	21-3/8"	-	-	-	-	-	-	28	
	C8519	surface-mount rolled		21-1/8"	21-3/16"	8-1/2"	21-3/8"	21-3/8"	-	-	-	-	-	-	28	
	C8415	3/8" flat square	✓	18"	18"	10"	21-3/8"	21-3/8"	19"	19"	9-7/8"	5"	9"	5"	24	
	C8416	1-1/4" square	✓	18"	18"	10"	21-3/8"	21-3/8"	19"	19"	8-7/8"	5"	9"	5"	26	
	C8417	2-1/2" rolled	✓	18"	18"	10"	21-3/8"	21-3/8"	19"	19"	7-5/8"	5"	9"	5"	28	
	C8413	surface-mount square		21-1/8"	21-3/16"	10-1/2"	21-3/8"	21-3/8"	-	-	-	-	-	-	30	
	C8419	surface-mount rolled		21-1/8"	21-3/16"	10-1/2"	21-3/8"	21-3/8"	-	-	-	-	-	-	30	
COMBINATION DUAL SIDE-BY-SIDE VALVE & FIRE EXTINGUISHER CABINET or TWO VALVES CABINET																
	C8715	3/8" flat square	✓	26"	26"	8"	29-3/8"	29-3/8"	27"	27"	7-7/8"	4"	13"	2-1/2"	41	
	C8716	1-1/4" square	✓	26"	26"	8"	29-3/8"	29-3/8"	27"	27"	6-7/8"	4"	13"	2-1/2"	41	
	C8717	2-1/2" rolled	✓	26"	26"	8"	29-3/8"	29-3/8"	27"	27"	5-5/8"	4"	13"	2-1/2"	43	
	C8713	surface-mount square		29-3/16"	29-3/16"	10-1/2"	29-3/8"	29-3/8"	-	-	-	-	-	-	45	
	C8719	surface-mount rolled		29-3/16"	29-3/16"	10-1/2"	29-3/8"	29-3/8"	-	-	-	-	-	-	45	
	C8615	3/8" flat square	✓	26"	26"	10"	29-3/8"	29-3/8"	27"	27"	9-7/8"	5"	13"	5"	43	
	C8616	1-1/4" square	✓	26"	26"	10"	29-3/8"	29-3/8"	27"	27"	8-7/8"	5"	13"	5"	43	
	C8617	2-1/2" rolled	✓	26"	26"	10"	29-3/8"	29-3/8"	27"	27"	7-5/8"	5"	13"	5"	45	
	C8613	surface-mount square		29-1/8"	29-3/16"	10-1/2"	29-3/8"	29-3/8"	-	-	-	-	-	-	47	
	C8619	surface-mount rolled		29-1/8"	29-3/16"	10-1/2"	29-3/8"	29-3/8"	-	-	-	-	-	-	47	
COMBINATION VALVE & FIRE EXTINGUISHER CABINET																
	C8015	3/8" flat square	✓	16"	40"	9"	19-3/8"	43-3/8"	17"	41"	8-7/8"	4-1/2"	4"	4-1/2"	35	
	C8016	1-1/4" square	✓	16"	40"	9"	19-3/8"	43-3/8"	17"	41"	7-7/8"	4-1/2"	4"	4-1/2"	35	
	C8017	2-1/2" rolled	✓	16"	40"	9"	19-3/8"	43-3/8"	17"	41"	6-5/8"	4-1/2"	4"	4-1/2"	37	
	C8013	surface-mount square		19-1/8"	43-3/16"	9-1/2"	19-3/8"	43-3/8"	-	-	-	-	-	-	38	
	C8019	surface-mount rolled		19-1/8"	43-3/16"	9-1/2"	19-3/8"	43-3/8"	-	-	-	-	-	-	38	

--** for 6" depth tubs with 2-1/2" rolled trim, knockouts by others during installation back or side of tub, as determined by field conditions.

Valve:
KOs 1-1/2" & 2-1/2"
1 centered, each side of tub
Fire Department Valve

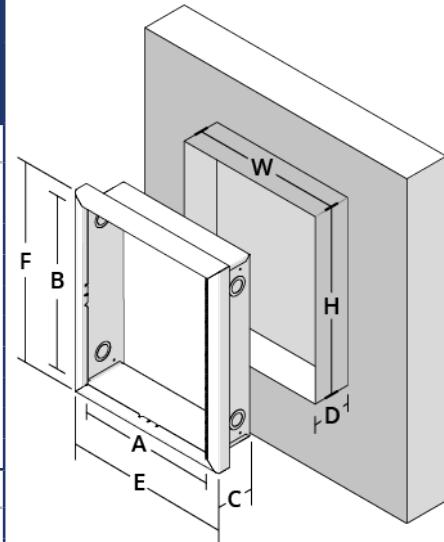

Dual side by side Valve & Extinguisher or 2 Valves:
KOs 1-1/2" & 2-1/2"
1 centered, each side of tub
Fire Department Valve & Cosmic
or Galaxy 2½lb -10lb Fire
Extinguisher
or
2 Fire Department Valves

SQUARE TRIM STYLE & PROJECTION		
RECESSED	SEMI-RECESSED	SURFACE-MOUNT
5	6	3
3/8" Flat Square	1-1/4" Square	5-1/2" to 8-1/2" Square

ROLLED TRIM STYLE & PROJECTION	
SEMI-RECESSED	SURFACE-MOUNT
7	9
2-1/2" or 3" Rolled	5-1/2" to 8-1/4" Rolled

FIRE PROTECTION CABINET - FIRE EXTINGUISHER, VALVE, HOSE, & COMBINATION CABINETS: CROWNLINE™ SERIES - Steel

	SOLID	FULL VIEW	VERTICAL DUO	HORIZONTAL DUO	SMALL WINDOW	CENTER HORIZONTAL DUO
STANDARD PULL	S21	F	V	D		(Not available)
STANDARD PULL & SAF-T-LOK	L22	G	W	E	B	A
NO HANDLE & SAF-T-LOK	L24					

HANDLE/LATCH OPTIONS (sold separately)

QTY	MODEL	DESCRIPTION
1	PUF	Futura "FIRE" Mill
1	PUFR	Futura "FIRE" Red
1	PUFW	Futura "FIRE" White
1	PUCH	Chrome pull handle

PLASTIC SIGNS (sold separately)

QTY	MODEL	DESCRIPTION
1	22S	FE, 3D ANGLE, 4" x 12"
1	23S	FE, 3D TENT, 4" x 18"
1	24S	FE, 3D TENT, 5" x 6"
1	25S	FE, FLUSH, 4" x 12"

Refer to supplemental submittals for information on more options and accessories.

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.

DOOR/LATCH STYLE		GLAZING/DOOR TYPE	
MODEL	DESCRIPTION	MODEL	DESCRIPTION
F	Full view	10	.09" Clear acrylic
G	Full view w SAF-T-LOK™	13	1/4" Clear wired glass
D	Horizontal duo	15	1/8" Bronze acrylic
E	Horizontal duo w SAF-T-LOK™	16	1/8" Gray acrylic
A	Center duo panel w SAF-T-LOK™	17	1/8" Clear tempered glass
V	Vertical duo	18	1/4" Clear safety glass
W	Vertical duo w SAF-T-LOK™	21	No glazing, no lock w pull (S21 only)
B	Small view window w SAF-T-LOK™	22	No glazing w SAF-T-LOK™ w pull (L22 only)
S	Solid (no glazing)	24	No glazing w SAF-T-LOK™ and no pull (L24 only)
L	Solid (no glazing) w SAF-T-LOK™		

HANDLE/LATCH OPTIONS

(installed at an additional cost)

MODEL	DESCRIPTION	MODEL	DESCRIPTION
A	Recessed handle	CA	Commander
LH	Lever handle (not avail. with SAF-T-LOK™)	BA	Brigadier
MC	Magnetic latch (replaces roller catch)	SA	Strobe

FINISH OPTIONS

MODEL	DESCRIPTION	MODEL	DESCRIPTION
BK	Black door, trim, tub	SS	Silkscreen
R	Red door, trim, tub	ET	Etching on glass
COLOR - OTHER (please specify)		EN	Engraving on metal
Door		LETTERING - OTHER (please specify)	
Trim		Other	
Tub			

CUSTOM LETTERING OPTIONS

(when manufactured at additional cost)

Refer to supplemental submittal for more options

LETTERING (sold separately)

QTY	MODEL	"FIRE EXTINGUISHER" DESCRIPTION
1	LDCVRFE	DIE CUT, VERT, RED, 3/4" x 18"
1	LDCVWFE	DIE CUT, VERT, WHITE, 3/4" x 18"
1	LDCVBFE	DIE CUT, VERT, BLACK, 3/4" x 18"
1	LDVRFE	DECAL, VERT, RED, 3/4" x 18"
1	LDVBFE	DECAL, VERT, BLACK, 3/4" x 18"
1	LDVWFE	DECAL, VERT, WHITE, 3/4" x 18"
1	LDCVRFE-ESM-A	DIE CUT, VERT, RED, (fits 81 tub), 3/4" x 14"
1	LDCHRFE-2	DIE CUT, HORZ, RED, 2" HIGH, 4-1/2" x 21"
1	Other	

Refer to supplemental submittal for more options