
FLOOR DOOR - DRAINABLE FLOOR DOOR - FLDDA flush floor door with integral gutter to drain moisture away from the door opening.

© 2020 Activar Construction Products Group, Inc.

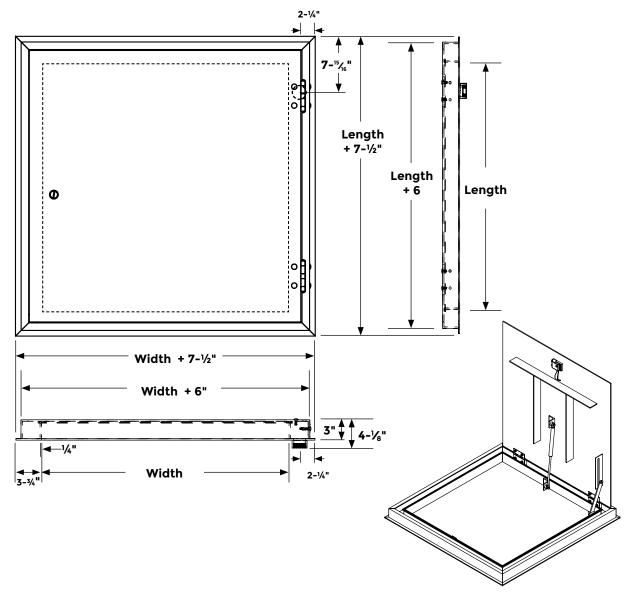

SPECIFICATIONS:

Frame Material: 1/4" extruded aluminum

Door Material: Reinforced 1/4" diamond aluminum plate. **Standard Finish:** Mill with bituminous coating on outer frame

Frame Construction: Channel frame with 1-½" NPT female threaded aluminum pipe fitting for water drainage.

Latch: 304 Stainless steel slam latch with flush key operator on exterior and handle opener on inside. Removable stainless 18-8 threaded plug and 5/16" steel square key included.

Hinge: 304 Stainless steel

Spring: 304 Stainless steel gas assist opener

Hold Open Arm: Stainless steel automatically locks door open


Load: 300psf

Sizes: Minimum 24" x 24", Maximum 60" x 60" ORDER SIZE = FRAME INSIDE DIMENSION


| QTY | MODEL | ORDE WIDTH | R SIZE LENGTH | DOORS | APPROX. WEIGHT |
|-----|-------------|---------------|------------------|--------|-------------------|
| | FLDD-2424S | 24" | 24" | Single | 90 |
| | FLDD-2436S | 24" | 36" | Single | 106 |
| | FLDD-3030S | 30" | 30" | Single | 101 |
| | FLDD-3048S | 30" | 48" | Single | 140 |
| | FLDD-3636S | 36" | 36" | Single | 120 |
| | FLDD-3648S | 36" | 48" | Single | 151 |
| | FLDD-3730S | 37" | 30" | Single | 105 |
| | FLDD-4242S | 42" | 42" | Single | 180 |
| | FLDD-4848D | 48" | 48" | Double | 200 |
| | FLDD-6060D | 60" | 60" | Double | 320 |
| | Custom Size | | | | |

ADDITIONAL OPTIONS:


Padlock Tab - **PT**



FLOOR DOOR - DRAINABLE FLOOR DOOR - FLDD

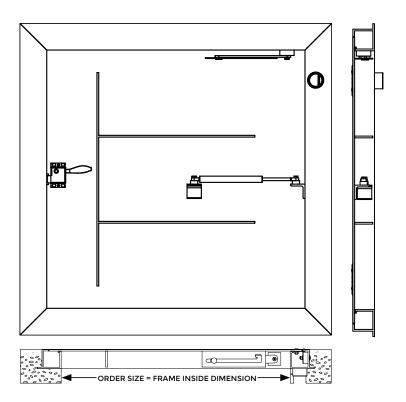





Latch Detail

