



NEW!

RETROMOUNT™ ROOF HATCH



RHRM (Mounted on existing curb)

The RetroMount series roof hatch is a low-profile replacement option for a damaged roof hatch. You remove the existing hatch cover and reuse the existing curb. The RetroMount hatch installs directly onto the existing curb. This alleviates the need to do any re-roofing around the hatch itself. This unit is available in several standard sizes and custom sizes upon request.

Benefits:

- Easy to Install
- No re-roofing required
- Installs onto existing curb
- Available in various sizes

RETROMOUNT™ ROOF HATCH



SPECIFICATIONS:

Material:

Curb: 14 gauge galvanized steel

Cover: 14 gauge with 22 gauge liner galvanized steel. Formed and welded cover with a liner. Supports a live load of 40psf.

Finish: White textured powder coat paint on steel

Gasket: Continuous, weatherproof EPDM sponge rubber adhesive-backed seal

Insulation: 1" polyisocyanurate in curb and cover with thermal resistance R-6

Hold Open Arm: Clear zinc-plated automatic locking hold open arm with red grip for one handed door operation

Latch: Clear zinc-plated steel slam latch with inside and outside handles and padlock hasps. Holds covers closed against a 20psf wind uplift.

Hinge: Heavy duty zinc plated steel pintle hinge system

Springs: Powder coated, oil tempered, steel torsion spring provides counterbalanced door lift assistance

Hardware: Zinc-plated steel anchor tabs included with 1/4-20x3/4" Philips head, self-tapping sheet metal screws for securing to inside of existing curb

Sizes: W x L (inside curb dimensions, where L is hinged side)



Minimum: 24" X 24"

Maximum: 48" X 54"

MODEL	DESCRIPTION	SIZE W x L	WT
RHRMG-1WT	STEEL, WHT TEX	36" x 30"	115
RHRMG-2WT	STEEL, WHT TEX	30" x 54"	148
RHRMG-4WT	STEEL, WHT TEX	36" x 36"	125
RHRMG-5WT	STEEL, WHT TEX	48" x 48"	195



RHRM

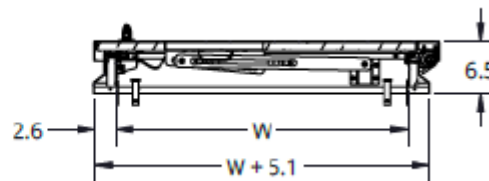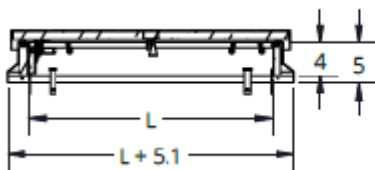

ACTIVAR CONSTRUCTION PRODUCTS GROUP INC.

Visit www.activarcpg.com for more info

1-800-554-6077 | SALES@ACTIVARCPG.COM

©2024 Activar Construction Products Group, Inc.

12-22-2025