SUBMITTAL: CROWNLINE™ VALVE & HOSE CABINETS - TRIMLESS FIRE-FX™ STAINLESS STEEL

Crownline Cabinets Provide A Wide Selection of Door Styles, Glazing and Sizes. These Durable Cabinets are Designed to Industry Standards for Fire Department Valves, Fire Hose Rack Units and Extinguishers. The Trimless Model is Designed to be Installed Under the Drywall, for a Flush Finished Surface.

Door: #4 Brushed finish stainless steel. These flush cabinet doors are attached by a continuous hinge and are equipped with zinc-plated handle and roller catch for all non-locking doors. Doors with glazing have 1-1/4" wide trim. Theft-deterrent SAF-T-LOK™ also available.

Flange Style & Depth: Trimless Recessed for 5/8" depth drywall or 3/4" depth plaster. First layer of drywall is to be installed before cabinet, second layer over flange after cabinet is installed.

Tub: The tub is constructed of cold rolled steel with white powder-coat finish standard. Tub forms a flange which is installed before drywall or plaster material. Fire-resistant material is attached to the exterior of the tub.

Knockouts: Knockouts are not provided on Fire-Rated Cabinets. Instructions for Knockouts in the field are provided, and must be strictly adhered to, to maintain fire rating.

Fire Rating: Fire-FX2TM cabinets are UL listed and labeled as an approved membrane penetration firestop system for up to 2 hours in accordance with UL 1479 (ASTM-E814) and CAN/

ULC-S115, when properly installed in a wall assembly according to installation instructions. ADA Cabinet Mounting Height: Standard Pull on G, E, W, L22, A and B Door Styles with Saf-T-Lok are 3 5/8" Higher than Door Center, so Allow for that When Mounting Cabinet. Standard Pull with No Lock or ADA Recessed Pull are Centered on Door. STEP 1: <u>SELECT MODEL NUMBER, TRIM & QUANTITY</u> (Refer to Chart on Page 2) STEP 2: SELECT DOOR STYLE (Check one box below) V - Vertical duo panel F - Full glass with pull D - Horizontal duo G - Full glass with pull panel with pull with pull Full Glazing L22 Solid with SAF-T-LOK handle and Saf-T-Lok E - Horizontal duo W - Vertical duo panel (Not Shown) panel with pull and Saf with pull and Saf-T-Lok. Full Glazing with SAF-T-LOK G Vertical Duo (Not Shown) -T-Lok. (Not Shown) Horizontal Duo Panel W Vertical Duo with SAF-T-LOK Horizontal Duo Panel with SAF-T-LOK B10 Solid with View Window & SAF-T-LOK Center Duo Panel with SAF-T-LOK L24 Solid with Cylinder Lock & No Handle S21 Solid Door **STEP 3: SELECT DOOR GLAZING** (Check one box below) 10 Clear Acrylic 16 Gray Acrylic 13 Clear Wire Glass with Safety Film 17 Clear Tempered Glass S21 - Solid with pull B10 - Acrylic view - Center duo panel 15 Bronze Acrylic 18 Laminated Safety Glass L22 - Solid with pull window with pull, with pull and and Saf-T-Lok and Saf-T-Lok L24 - Solid with cylinder key lock/no pull STEP 4: OPTIONAL FEATURES AT ADDITIONAL COST: (I 22.24 not shown #6 Matte Finish Stainless Steel **PUCH** Polished Chrome Pull Black Vertical FE Letters LDCVBFE #7 Polished Stainless Steel FDVO Decal Fire Department Valve Octagonal 6 x 6" Red Vertical FE Letters LDCVRFE #8 Mirror Finish Stainless Steel 1403 Decal Fire Hose Black/Red Horiz, Letters 4 x 9 White Vertical FE Letters LDCVWFE # 4 Finish Stainless Tub LDCHRFDV-R Diecut Fire Dept. Valve Horiz.10-1/4 x 4-3/8 Black Horizontal FE Letters LDCHBFE Optional Tub Color: __ Black __Red LDCVRFDV Diecut Fire Dept Valve Vert. 3/4" x 211/2" Red Horizontal FE Letters LDCHRFE **CA** Commander Alarm LDCVRFDV-R Diecut Fire Dept Valve Vert. Rever. 3/4" x 211/2" White Horizontal FE Letters LDCHWFE

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.

LDCHRFDV Diecut Fire Department Valve Ascend. 1" x 17"

LDCVRFSCV-R Diecut Fire Sprinkler Cont. Valve Vert 3/4" x 18"

	800-554-6077	Distributor:		Project:			
JL INDUSTRIES	sales@activarcpg.com	Contractor:		Approved By:			
	www.activarcpg.com	Date:	Quantity:	Architect:			
9702 Newton Av S. Bloomin	gton, MN 55431	Scale: N/A	Pages: 1 of 2	Item #			
@ 2024 Activar Construction Products The Information contained in this document is the sole property of Activar Construction Products							

BA Brigadier Alarm

PRH Recessed Pull Handle

Futura "Fire" Handle__ Mill__ Red__ White

Shelf for 8000 Series—12" from Top

Fire Hose Racks - See separate submittal

Lettering: Etched on Glass, Engraving on Metal, Silkscreen; Not Available for #7 or

#8 Finish on Doors. Check Box and At-


tach Separate Submittal to Order.

Recessed Flange for

Installation Under

Drywall or Plaster

SUBMITTAL: CROWNLINE™ VALVE & HOSE CABINETS - TRIMLESS FIRE-FX™ STAINLESS STEEL PG 2 OF 2

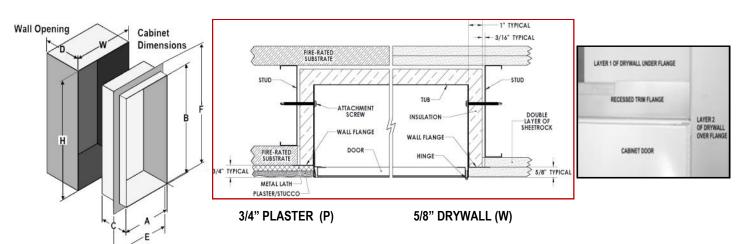

	MODEL	TUB I.D. W x H x D in Inches			FRAME O.D.		RECESSED WALL OPENING			RECOMMENDED HOSE RACK, VALVES
QTY			B Height					Height		& EXTINGUISHERS
	TRIMLESS F	X2 CAI	BINET W	ITH RE	CESSE	D FLAN	GE FO	R INSTA	LLATIO	N OF 5/8" DRYWALL OVER FLANGE Example of Part # 6134WF10FX2
	6034W FX2	24	30	6	27 1/8	33 1/8	26 5/16	32 5/16	6 11/16	HOSE RACK: 1- 1/2" x 1-1/2" Hose Rack Unit with 50 or 75' Hose (HRA:050B, 050CH, 075B, 075CH) & Cosmic 2½ or Galaxy 2½- 5 lb Extinguisher
	6234W FX2	24	34-3/4	6	27 1/8	37 7/8	26 5/16	37 1/16	6 11/16	HOSE RACK: 1- 1/2" x 1-1/2" Hose Rack Unit - 100' Hose (HRA 100B, HRA100CH) & Cosmic 2½ or Galaxy 2½-5 lb Extinguisher
	6134W FX2	24	30	8	27 1/8	33 1/8	26 5/16	32 5/16	8 11/16	HOSE RACK : 2-1/2" x 1-1/2" Hose Rack Unit 50 or 75' Hose (HRA050B-2.5, HRA075B-2.5)
	6434W FX2	24	34 3/4	8	27 1/8	37 7/8	26 5/16	37 1/16	8 11/16	HOSE RACK: 2-1/2" x 1-1/2" Hose Rack Unit 100' Hose (HRA100B-2.5)
	6634W FX2	24	38 3/4	8	27 1/8	41 7/8	26 5/16	41 1/16	8 11/16	HOSE RACK: 2-1/2" x 1-1/2" Hose Rack Unit 125' Hose (HRA125B-2.5)
	6334W FX2	30	30	8	33 1/8	33 1/8	32 5/16	32 5/16	8 11/16	HOSE RACK & FD VALVE OR EXTINGUISHER: 1-1/2" OR 2-1/2" Valve; 50' or 75' Hose Rack Unit Plus FD Valve or Cosmic or Galaxy Fire Extinguisher
	6534W FX2	32 3/4	34 3/4	8	35 7/8	37 7/8	35 1/16	37 1/16	8 11/16	HOSE RACK & FD VALVE OR EXTINGUISHER:1-1/2" OR 2-1/2" Valve, 100' Hose Rack Unit Plus FD Valve or Cosmic or Galaxy Fire Extinguisher
	7234W FX2	32 3/4	38 3/4	8	35 7/8	41 7/8	35 1/16	41 1/16	8 11/16	HOSE RACK & FD VALVE OR EXTINGUISHER: 1-1/2" OR 2-1/2" Valve,125' Hose Rack Unit Plus FD Valve or Cosmic or Galaxy Fire Extinguisher
	8534WFX2	18	18	8	21 1/8	21 1/8	20 5/16	20 5/16	8 11/16	FIRE DEPARTMENT VALVE, 4.4/01 as 0.4/01 Fire Department Valve with Contract Chain
	8434W FX2	18	18	10	21 1/8	21 1/8	20 5/16	20 5/16	10 11/16	FIRE DEPARTMENT VALVE: 1-1/2" or 2-1/2" Fire Department Valve with Cap and Chain
	8734W FX2	26	26	8	29 1/8	29 1/8	28 5/16	28 5/16	8 11/16	DUAL SIDE BY SIDE FD VALVES & EXTINGUISHER OR 2 FD VALVES: 1-1/2" or 2-
	8634W FX2	26	26	10	29 1/8	29 1/8	28 5/16	28 5/16	10 11/16	1/2" with Cap and Chain Plus Extinguisher - Cosmic & Galaxy 2-1/2 to 10
	8034W FX2	16	40	9	19 1/8	43 1/8	18 5/16	42 5/16	9 11/16	DUAL EXTINGUISHER & FD VALVE CABINET: Cosmic or Galaxy Fire Extinguisher
	TRIMLES	S CABI	NET WIT	H REC	ESSED	FLANG	E FOR	INSTAL	LATION	OF 3/4" PLASTER OVER FLANGE Example of Part # 6034PF10FX2
	6034PFX2	24	30	6	27 1/8	33 1/8	26 5/16	32 5/16	6 9/16	HOSE RACK: 1- 1/2" x 1-1/2" Hose Rack Unit with 50 or 75' Hose (HRA:050B, 050CH, 075B, 075CH) & Cosmic 2½ or Galaxy 2½- 5 lb Extinguisher
	6234PFX2	24	34-3/4	6	27 1/8	37 7/8	26 5/16	37 1/16	6 9/16	HOSE RACK: 1- 1/2" x 1-1/2" Hose Rack Unit - 100' Hose (HRA 100B, HRA100CH) & Cosmic 2½ or Galaxy 2½-5 lb Extinguisher
	6134PFX2	24	30	8	27 1/8	33 1/8	26 5/16	32 5/16	8 9/16	HOSE RACK : 2-1/2" x 1-1/2" Hose Rack Unit 50 or 75' Hose (HRA050B-2.5, HRA075B-2.5)
	6434PFX2	24	34 3/4	8	27 1/8	37 7/8	26 5/16	37 1/16	8 9/16	HOSE RACK: 2-1/2" x 1-1/2" Hose Rack Unit 100' Hose (HRA100B-2.5)
	6634PFX2	24	38 3/4	8	27 1/8	41 7/8	26 5/16	41 1/16	8 9/16	HOSE RACK: 2-1/2" x 1-1/2" Hose Rack Unit 125' Hose (HRA125B-2.5)
	6334PFX2	30	30	8	33 1/8	33 1/8	32 5/16	32 5/16	8 9/16	HOSE RACK & FD VALVE OR EXTINGUISHER: 1-1/2" OR 2-1/2" Valve; 50' or 75' Hose Rack Unit Plus FD Valve or Cosmic or Galaxy Fire Extinguisher
	6534PFX2	32 3/4	34 3/4	8	35 7/8	37 7/8	35 1/16	37 1/16	8 9/16	HOSE RACK & FD VALVE OR EXTINGUISHER: 1-1/2" OR 2-1/2" Valve, 100' Hose Rack
	7234PFX2	32 3/4	38 3/4	8	35 7/8	41 7/8	35 1/16	41 1/16	8 9/16	Unit Plus FD Valve or Cosmic or Galaxy Fire Extinguisher
	8534PFX2	18	18	8	21 1/8	21 1/8	20 5/16	20 5/16	8 9/16	FIRE DEPARTMENT VALVE: 1-1/2" or 2-1/2" Fire Department Valve with Cap and Ch
	8434P FX2	18	18	10	21 1/8	21 1/8		20 5/16	10 9/16	
	8734P FX2	26	26	8	29 1/8	29 1/8	28 5/16	28 5/16	8 9/16	DUAL SIDE BY SIDE FD VALVES & EXTINGUISHER OR 2 FD VALVES: 1-1/2" or 2 1/2" with Cap and Chain Plus Extinguisher - Cosmic & Galaxy 2-1/2 to 10
	8634P FX2	26	26	10	29 1/8	29 1/8	28 5/16	28 5/16	10 9/16	
	8034P FX2	16	40	9	19 1/8	43 1/8	18 5/16	42 5/16	9 9/16	DUAL EXTINGUISHER & FD VALVE CABINET: Cosmic or Galaxy Fire Extinguisher