

SUBMITTAL: CROWLINE FIRE-FX2™ CABINETS - STAINLESS STEEL PAGE 1 OF 2

Fire-Rated Crownline Cabinets Provide A Wide Selection of Door Styles, Glazing and Sizes. These Durable Cabinets are Designed to Industry Standards for Fire Department Valves, Fire Hose Rack Units and Extinguishers.

Door & Trim: #4 Brushed finish stainless steel. 1-3/4" Trim on face and door. These flush cabinet doors are mounted in a 5/8" door stop, are attached by a continuous hinge and are equipped with zinc-plated handle and roller catch for all non-locking doors.


Trim Style and Depth: 1-3/4" face trim on frame and 1-1/4" trim on door. Recessed - 3/8" flat trim. Semi-recessed - 1-1/4" Square Edge or 2-1/2" Rolled Edge. See separate submittal for trimless models.

Tub: The tub is constructed of cold rolled steel with white powder-coat finish standard. Tub forms a flange to cover cut edges of wallboard material. Fire-resistant material is attached to the exterior of the tub.


Please note that dimensions for wall opening have changed in 2015. See Chart on pg 2.

Knockouts: Knockouts are not provided on Fire-Rated Cabinets. Instructions for Knockouts in the field are provided, and must be strictly adhered to, to maintain fire rating.

Special Features: Models 8035, 8036, 8037 & 8039 have a shelf 12" from the bottom of the cabinet and are designed to hold a fire extinguisher plus FD valve or other accessory. Those models can also be ordered without shelf to allow for lower mounting height of valve piping to meet NFPA10.

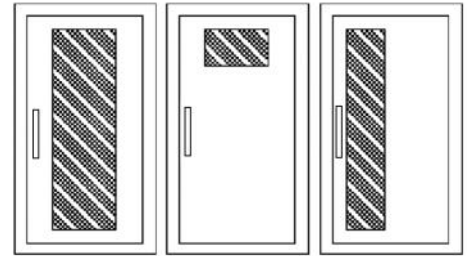

F - Full glass with pull handle
G - Full glass with pull handle & Saf-T-Lok
D - Horizontal duo panel with pull handle
E - Horizontal duo panel with pull handle & Saf-T-Lok
V - Vertical duo panel with pull handle
W - Vertical duo panel with pull handle & Saf-T-Lok

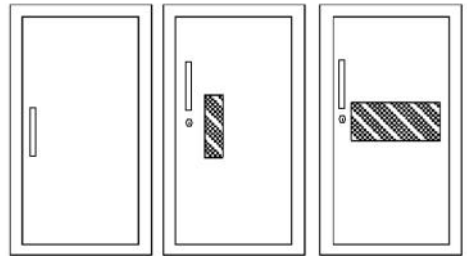

S21 - Solid with pull handle
L22 - Solid with pull handle & Saf-T-Lok
B - Solid with pull, small view window and Saf-T-Lok
A - Center duo panel with pull and Saf-T-Lok

Fire-Rating: Fire-FX2™ cabinets are fabricated in accordance with the UL label for one and two hour combustible and non-combustible wall system building codes. The fire testing has met the requirement of ANSI/UL 1479 (ASTM -E814) and ULC/CAN S115-for membrane and penetration firestops.



STEP 1: SELECT MODEL NUMBER, TRIM & QUANTITY (Refer to Chart on Page 2)

STEP 2: SELECT DOOR STYLE WITH HANDLE (Check one box below)

- | | |
|---|---|
| <input type="checkbox"/> F Full Glazing | <input type="checkbox"/> L22 Solid with SAF-T-LOK™ |
| <input type="checkbox"/> G Full Glazing with SAF-T-LOK™ | <input type="checkbox"/> V Vertical Duo |
| <input type="checkbox"/> D Horizontal Duo Panel | <input type="checkbox"/> W Vertical Duo with SAF-T-LOK™ |
| <input type="checkbox"/> E Horizontal Duo Panel with SAF-T-LOK™ | <input type="checkbox"/> B Solid w/Small View Window & SAF-T-LOK™ |
| <input type="checkbox"/> A Center Duo Panel with SAF-T-LOK™ | <input type="checkbox"/> L24 Solid with Cylinder Lock & No Handle |
| <input type="checkbox"/> S21 Solid Door | |


[View Door Styles](#)

STEP 3: SELECT DOOR GLAZING (Check one box below)

- | | |
|---|--|
| <input type="checkbox"/> 10 Clear Acrylic | <input type="checkbox"/> 16 Gray Acrylic |
| <input type="checkbox"/> 13 Clear Wire Glass with Safety Film | <input type="checkbox"/> 17 Clear Tempered Glass |
| <input type="checkbox"/> 15 Bronze Acrylic | <input type="checkbox"/> 18 Laminated Safety Glass |


STEP 4: OPTIONAL FEATURES AT ADDITIONAL COST:

- | | | |
|---|---|---|
| <input type="checkbox"/> #6 Matte Finish Stainless Steel Door & Trim | <input type="checkbox"/> P6 Polished Chrome Lever Handle | <input type="checkbox"/> Black Vertical FE Letters LDCVBF E |
| <input type="checkbox"/> #7 Polished Stainless Steel Door & Trim | <input type="checkbox"/> FDVO Decal "Fire Dept Valve" Octagonal 6 x 6" | <input type="checkbox"/> Red Vertical FE Letters LDCVRF E |
| <input type="checkbox"/> #8 Mirror Finish Stainless Steel Door & Trim | <input type="checkbox"/> 1403 Decal "Fire Hose" Vert. Blk Bkgd, Red Letters 4 x 9 | <input type="checkbox"/> White Vertical FE Letters LDCVWF E |
| Optional Tub Color: ___ Black ___ Red | <input type="checkbox"/> DCHF DV-R Diecut "Fire Dept Valve" Horiz. 10-3/4 x 4-3/8 | <input type="checkbox"/> Black Horizontal FE Letters LDCHBF E |
| <input type="checkbox"/> CA Commander Alarm | <input type="checkbox"/> DCVRF DV Diecut "Fire Dept Valve" Vert 3/4" x 17" | <input type="checkbox"/> Red Horizontal FE Letters LDCHRF E |
| <input type="checkbox"/> BA Brigadier Alarm | <input type="checkbox"/> #4 Finish Stainless Tub | <input type="checkbox"/> White Horizontal FE Letters LDCHWF E |
| <input type="checkbox"/> PUF Futura "Fire" Handle | | <input type="checkbox"/> Etched or Engraved Lettering - Metal/Glass |
| <input type="checkbox"/> 0710 Flush Pull Handle | | |

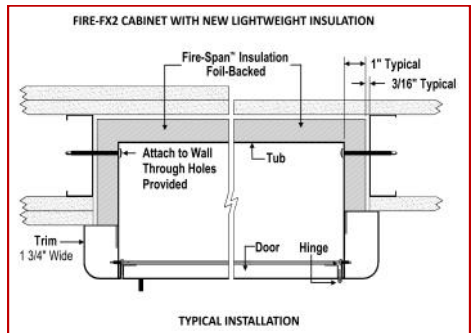

For More Options, Visit These Links to Separate Submittals: [Decals & Die Lettering](#), [Alarms](#), [Pulls & Levers](#), [Fire Extinguishers](#), [Fire Hose Racks](#)


<p>CROWLINE AND SAF-T-LOK ARE TRADEMARKS OF ACTIVAR PLEASE DOWNLOAD MOST CURRENT SUBMITTAL BEFORE ORDERING</p>	Distributor:	Quantity:
	Contractor:	Approved By:
	Model #:	Architect:
	Project:	Date:
<p>Headquarters: 9702 Newton Av S, Bloomington, Mn 55431 Ph: 800-554-6077 Fax: 952-835-2218</p> <p>Email: sales@activarcpg.com www.activarcpg.com Manufacturing: Bloomington MN/Commerce, CA © Activar Construction Products Group, Inc. 2017</p> <p>Warehouses: Ft Myers, FL Dallas TX, Lancaster PA, Atlanta GA, Chicago, IL, Seattle WA, Omaha NE, Fargo ND 08/11/17</p>		

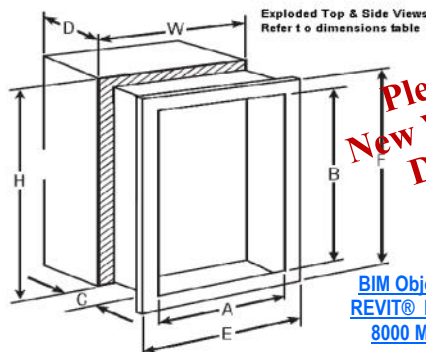

**Please Note!
New Wall Opening
Dimensions**

[BIM Objects for REVIT® Platform 8000 Models](#)

[BIM Objects for REVIT® Platform 6000/ 7000 Models](#)

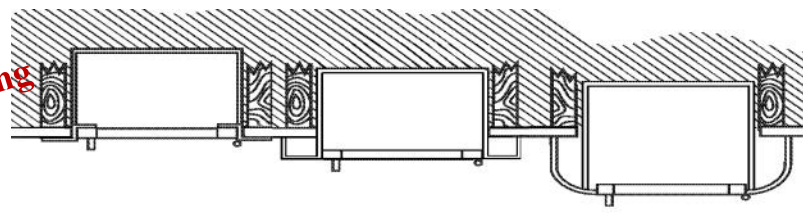

**3/8" (.9cm)
FLAT TRIM**

**1-1/4" (3.8cm)
SQUARE TRIM**

**2-1/2" (6.4cm)
ROLLED EDGE**

TRIM & DOOR MATERIAL & SERIES		TUB I.D. W x H x D in Inches			FRAME O.D.		FX Wall Opening New Dimensions 2015 - Please Note			RECOMMENDED HOSE RACK, FIRE DEPARTMENT VALVES & EXTINGUISHERS
QTY #	TRIM STYLE	A	B	C	E	F	Width	Height	Depth	
Cabinets with Hose Rack & Extinguisher or Fire Department Valve										
6035	FLAT TRIM 3/8" ●	24	30	6	27 3/8	33 3/8	26 5/16	32 5/16	6 15/16	HOSE RACK: 1- 1/2" x 1-1/2" Hose Rack Unit 50 or 75' Hose (3005, 3105, 3007, 3107) plus Cosmic 2.5 or Galaxy 2.5-5 lb Extinguisher
6036	1-1/4" SQUARE EDGE ●	24	30	6	27 3/8	33 3/8	26 5/16	32 5/16	5 15/16	
6037	2-1/2" ROLLED EDGE ●	24	30	6	27 3/8	33 3/8	26 5/16	32 5/16	4 11/16	
6235	FLAT TRIM 3/8" ●	24	34 3/4	6	27 3/8	38 1/8	26 5/16	37 1/16	6 15/16	HOSE RACK: 1- 1/2" x 1-1/2" Hose Rack Unit 100' Hose (3010 or 3110) plus Cosmic 2.5 or Galaxy 2.5-5 lb Extinguisher
6236	1-1/4" SQUARE EDGE ●	24	34 3/4	6	27 3/8	38 1/8	26 5/16	37 1/16	5 15/16	
6237	2-1/2" ROLLED EDGE ●	24	34 3/4	6	27 3/8	38 1/8	26 5/16	37 1/16	4 11/16	
6135	FLAT TRIM 3/8" ●	24	30	8	27 3/8	33 3/8	26 5/16	32 5/16	8 15/16	HOSE RACK: 2-1/2" x 1-1/2" Hose Rack Unit 50 or 75' Hose (3205, 3207)
6136	1-1/4" SQUARE EDGE ●	24	30	8	27 3/8	33 3/8	26 5/16	32 5/16	7 15/16	
6137	2-1/2" ROLLED EDGE ●	24	30	8	27 3/8	33 3/8	26 5/16	32 5/16	6 11/16	
6435	FLAT TRIM 3/8" ●	24	34 3/4	8	27 3/8	38 1/8	26 5/16	37 1/16	8 15/16	HOSE RACK: 2-1/2" x 1-1/2" Hose Rack Unit 100' Hose (3210 Series)
6436	1-1/4" SQUARE EDGE ●	24	34 3/4	8	27 3/8	38 1/8	26 5/16	37 1/16	7 15/16	
6437	2-1/2" ROLLED EDGE ●	24	34 3/4	8	27 3/8	38 1/8	26 5/16	37 1/16	6 11/16	
6635	FLAT TRIM 3/8" ●	24	38 3/4	8	27 3/8	42 1/8	26 5/16	41 1/16	8 15/16	HOSE RACK: 2-1/2" x 1-1/2" Hose Rack Unit 125' Hose (3212 Series)
6636	1-1/4" SQUARE EDGE ●	24	38 3/4	8	27 3/8	42 1/8	26 5/16	41 1/16	7 15/16	
6637	2-1/2" ROLLED EDGE ●	24	38 3/4	8	27 3/8	42 1/8	26 5/16	41 1/16	6 11/16	
6335	FLAT TRIM 3/8" ●	30	30	8	33 3/8	33 3/8	32 5/16	32 5/16	8 15/16	HOSE RACK & FD VALVE OR EXTINGUISHER: 1-1/2" OR 2-1/2" Valve , 50' or 75' Hose Rack Unit Plus FD Valve or Extinguisher (except Sentinel 10-20 & 272)
6336	1-1/4" SQUARE EDGE ●	30	30	8	33 3/8	33 3/8	32 5/16	32 5/16	7 15/16	
6337	2-1/2" ROLLED EDGE ●	30	30	8	33 3/8	33 3/8	32 5/16	32 5/16	6 11/16	
6535	FLAT TRIM 3/8" ●	32 3/4	34 3/4	8	36 1/8	38 1/8	35 1/16	37 1/16	8 15/16	HOSE RACK & FD VALVE OR EXTINGUISHER: 1-1/2" OR 2-1/2" Valve , 100' Hose Rack Unit Plus FD Valve or Extinguisher (except Sentinel 20 & 272)
6536	1-1/4" SQUARE EDGE ●	32 3/4	34 3/4	8	36 1/8	38 1/8	35 1/16	37 1/16	7 15/16	
6537	2-1/2" ROLLED EDGE ●	32 3/4	34 3/4	8	36 1/8	38 1/8	35 1/16	37 1/16	6 11/16	
7235	FLAT TRIM 3/8" ●	32 3/4	38 3/4	8	36 1/8	42 1/8	35 1/16	41 1/16	8 15/16	HOSE RACK & FD VALVE OR EXTINGUISHER: 1-1/2" OR 2-1/2" Valve , 125' Hose Rack Unit Plus FD Valve or Extinguisher (except Sentinel 10-20 & 272)
7236	1-1/4" SQUARE EDGE ●	32 3/4	38 3/4	8	36 1/8	42 1/8	35 1/16	41 1/16	7 15/16	
7237	2-1/2" ROLLED EDGE ●	32 3/4	38 3/4	8	36 1/8	42 1/8	35 1/16	41 1/16	6 11/16	
Cabinets for Fire Department Valves										
8535	FLAT TRIM 3/8" ●	18	18	8	21 3/8	21 3/8	20 5/16	20 5/16	8 15/16	FIRE DEPARTMENT VALVE: 1-1/2" or 2-1/2" Fire Department Valve with Cap and Chain
8536	1-1/4" SQUARE EDGE ●	18	18	8	21 3/8	21 3/8	20 5/16	20 5/16	7 15/16	
8537	2-1/2" ROLLED EDGE ●	18	18	8	21 3/8	21 3/8	20 5/16	20 5/16	6 11/16	
8435	FLAT TRIM 3/8" ●	18	18	10	21 3/8	21 3/8	20 5/16	20 5/16	10 15/16	DUAL SIDE BY SIDE FD VALVES & EXTINGUISHER OR 2 FD VALVES: 1-1/2" or 2-1/2" with Cap and Chain Plus Extinguisher - Cosmic & Galaxy 2-1/2-10, Mercury 2-1/2- -11, Grenadier, Saturn 15-25, Sentinel 5
8436	1-1/4" SQUARE EDGE ●	18	18	10	21 3/8	21 3/8	20 5/16	20 5/16	9 15/16	
8437	2-1/2" ROLLED EDGE ●	18	18	10	21 3/8	21 3/8	20 5/16	20 5/16	8 11/16	
8735	FLAT TRIM 3/8" ●	26	26	8	29 3/8	29 3/8	28 5/16	28 5/16	8 15/16	DUAL EXTINGUISHER & FD VALVE CABINET WITH SHELF: Shelf is 12" from bottom. Any Extinguisher (Except Sentinel 15-20, & 272)
8736	1-1/4" SQUARE EDGE ●	26	26	8	29 3/8	29 3/8	28 5/16	28 5/16	7 15/16	
8737	2-1/2" ROLLED EDGE ●	26	26	8	29 3/8	29 3/8	28 5/16	28 5/16	6 11/16	
8635	FLAT TRIM 3/8" ●	26	26	10	29 3/8	29 3/8	28 5/16	28 5/16	10 15/16	
8636	1-1/4" SQUARE EDGE ●	26	26	10	29 3/8	29 3/8	28 5/16	28 5/16	9 15/16	
8637	2-1/2" ROLLED EDGE ●	26	26	10	29 3/8	29 3/8	28 5/16	28 5/16	8 11/16	
8035	FLAT TRIM 3/8" ●	16	40	9	19 3/8	43 3/8	18 5/16	42 5/16	9 15/16	
8036	1-1/4" SQUARE EDGE ●	16	40	9	19 3/8	43 3/8	18 5/16	42 5/16	8 15/16	
8037	2-1/2" ROLLED EDGE ●	16	40	9	19 3/8	43 3/8	18 5/16	42 5/16	7 11/16	