


## NON-RATED ACCESS PANELS - AIRTIGHT/WATERTIGHT SERIES: NGP

Our NGP interior/exterior access panel is ideal for applications where moisture or air movement is a consideration. Its continuous stainless steel piano hinge is designed to open 180 degrees for easy access. The panel has gasketing on all four sides to ensure continuity of the seal.

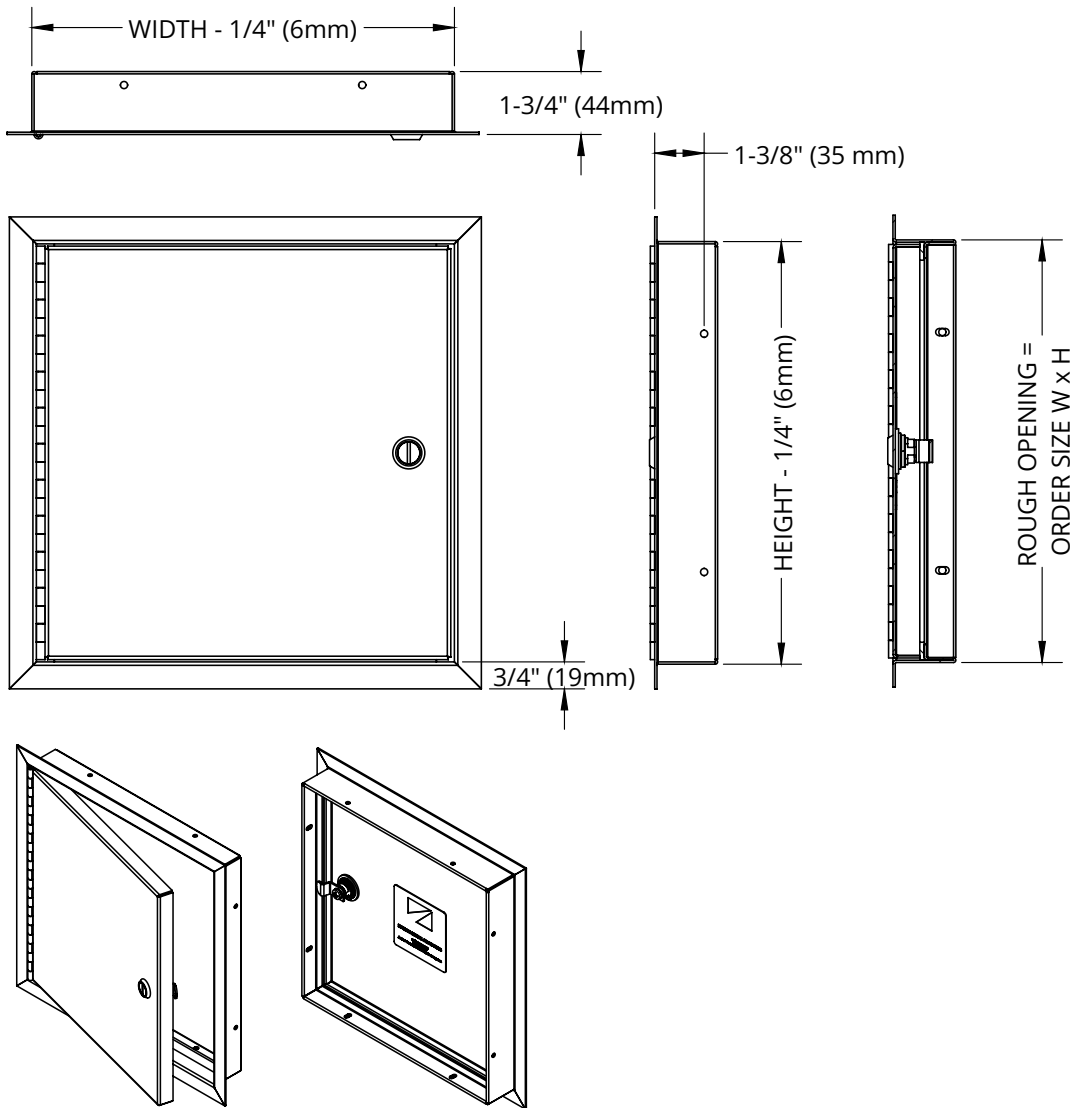

## SPECIFICATIONS:

- Frame Material:** 16 gauge (1.61 mm) galvanized steel
- Frame Flange:** Exterior flange width 3/4" (19 mm)
- Door Panel Material:** 16 gauge (1.6 mm) galvanized steel
- Standard Finish:** Off white prime coat
- Hinge:** Continuous stainless steel piano hinge
- Gasket:** Black, closed cell general purpose blended rubber; EPDM/ Neoprene/SBR
- Latch:** Screwdriver cylinder cam latch
- Sizes:**
  - Minimum:** 8" x 8" (203 mm x 203 mm)
  - Maximum:** 36" x 60" (914 mm x 1524 mm)

## PERFORMANCE:

Independently lab-tested for Air Infiltration/ Ex-filtration and Water Penetration Resistance in accordance with ASTM E283 and ASTM E331. Maximum size tested 24"X 36" (610 mm x 914 mm).

## OPTIONS:

- Optional Material:** 304 Stainless steel with #4 finish (model NGPS)
- Optional Latches:** 1/4" Allen key, non-locking two-position handle, cylinder key lock, 1-1/8" mortise prep complete with mortise cylinder
- Additional Options:** Masonry anchor straps, 1" (25 mm) foil faced insulation R=4.3, durable powder coat finish

## NOTE:


### ORDER SIZE W x H = ROUGH OPENING

When ordering, the second dimension given, H, is the hinge side.

## COMMON SIZES

QTY	Order Size		No. of Latches	Approx. Weight	
	W X H (Rough Opening)			kg	lbs
	inches	mm			
	8 x 8	203 x 203	1	1.92	4
	10 x 10	254 x 254	1	2.38	5
	12 x 12	305 x 305	1	3.06	7
	16 x 16	406 x 406	1	4.53	10
	18 x 18	457 x 457	1	5.44	12
	20 x 20	508 x 508	1	6.35	14
	24 x 24	610 x 610	2	8.39	19
	24 x 36	610 x 914	2	11.79	28
	30 x 30	762 x 762	4	12.13	27
	36 x 36	914 x 914	4	16.32	36
	Custom - specify size:				

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.

 <p>800-554-6077 sales@activarcpg.com www.activarcpg.com</p>	Distributor:		Project:	
	Contractor:		Approved By:	
	Date:		Architect:	
	Scale: N/A	Page 1 of 1	Item#:	