

SUBMITTAL: MODEL TMG/TMWG/TMPG/TMEG GALVANNEALED FLUSH ACCESS PANELS PG 1 OF 2

Model TMG features 4 models of 16 gauge galvanized steel access doors that afford fast and convenient access for inspection or service to vital components of plumbing, heating, air conditioning and/or electrical systems. The concealed hinged door is mounted to the frame and swings open for ease in servicing, resulting in a door that always closes squarely in place.

SPECIFICATIONS

Frame: 16 gauge galvanized steel.

Door: 16 gauge galvanized steel.

Finish: White powder coat paint.

Lock: Flush screwdriver-operated steel cam "C" with 1 or more on each side.

Sizes: Minimum 6" x 6", see below for maximums. Other size restrictions apply, consult customer service for sizes not shown.

STEP 1: SELECT MODEL:

TMG 1" flange to cover wallboard. Max size 36" x 48".

TMWG 1-1/4" drywall bead. Max size 36" x 48".

TMPG 1-3/8" wide, 3/4" deep plaster stop. Max Size Wall: 36"x 48", Max Size Ceiling: 36" x 36".

TMEG 1-3/8" wide, 3/4" deep plaster stop and extended 2-3/4" metal lath. Max Size Wall: 36"x 48", Max Size Ceiling: 36" x 36".

STEP 2: SELECT SIZE ON PAGE 2 (ENTER CUSTOM SIZES ON BOTTOM LINE OF CHART)

STEP 3: SELECT NON-STANDARD FRAME AND DOOR OPTIONS AT ADDITIONAL COST:

Galvanized Steel 14 gauge door with 16 gauge frame

Galvanized Steel 16 gauge door with 14 gauge frame

Galvanized Steel 14 gauge door with 14 gauge frame

STEP 4: SELECT OPTIONS AT ADDITIONAL COST

- Plexiglass View Window
- Rain Hood (TMG model only)
- Gasketing (4 sides on TMG, 3 sides for TMWG,TMPG,TMEG)
- Removable Door with no hinges
- Optional Color Code ____ See page 2
- (L) Cylinder lock installed
- (M1) Mortise cam lock prep 1-1/8" dia, 1-1/4" length
- #0646 Brass Retaining Ring for M1 -may be required for locks by others
- Alternate depth of trim flange for TMPG or TMEG: _____

- (M2) Mortise cam lock (06431) installed
- (U3) Mortise slam lock prep
- (U4) Mortise slam lock (06431) installed
- (B1) Mortise deadbolt prep
- (B2) Mortise deadbolt lock (06441) installed
- (C5) Knob cam
- (C2) Torx head cam View Lock Options Online
- (C4) Hex head cam
- (C3) Spanner head cam
- Other 1-1/8" dia. mortise cylinder by request: _____

See Separate Submittal for TMG: Double Door Panels, Louvered

TMG



TMWG



TMPG



TMEG



Order Format Example: TMG-2424CW

Model	Width	Height	Lock (C Std or other Lock Option Code)	Color	Options
TMG					
TMWG					
TMPG					
TMEG					





LATCH AND LOCK OPTIONS					
Mortise Lock (M2)(U4)(B2)	Cylinder Lock (L)	Torx Head Cam (C2)	Spanner Head Cam (C3)	Hex Head Cam (C4)	Knob Cam (C5)

<p>DOWNLOAD CURRENT SUBMITTAL BEFORE ORDERING TM™ IS A TRADEMARK OF ACTIVAR</p>	Distributor:	Quantity:
	Contractor:	Approved By:
	Model #:	Architect:
	Project:	Date:
HEADQUARTERS: 9702 NEWTON AVE S, BLOOMINGTON, MN 55431 PH: 800-554-6077 EMAIL: SALES@ACTIVARCPG.COM WWW.ACTIVARCPG.COM MANUFACTURING: BLOOMINGTON, MN & COMMERCE, CA WAREHOUSES: SEE WEBSITE FOR LOCATIONS 10/20/2021		

SUBMITTAL: MODEL TMG/TMWG/TMPG/TMEG GALVANNEALED FLUSH ACCESS PANELS PG 2 OF 2

Qty	A-Model Size = Door Size	B-Outside Frame Dimensions TMG 1" Trim Flange		C-Opening Dimensions Fits ± 1/8" Opening Size		Approx. Ship Wt. (lbs)	Latch(es)
	Width x Height	Width	Height	Width	Height		
	6" x 6"	8"	8"	6 1/2"	6 1/2"	4	1
	8" x 8"	10"	10"	8 1/2"	8 1/2"	4	1
	8" x 12"	10"	14"	8 1/2"	12 1/2"	6	1
	10" x 10"	12"	12"	10 1/2"	10 1/2"	6	1
	12" x 12"	14"	14"	12 1/2"	12 1/2"	7	1
	12" x 16"	14"	18"	12 1/2"	16 1/2"	9	1
	12" x 18"	14"	20"	12 1/2"	18 1/2"	10	1
	12" x 24"	14"	26"	12 1/2"	24 1/2"	12	2
	14" x 14"	16"	16"	14 1/2"	14 1/2"	9	1
	16" x 16"	18"	18"	16 1/2"	16 1/2"	11	1
	16" x 20"	18"	22"	16 1/2"	20 1/2"	13	2
	18" x 18"	20"	20"	18 1/2"	18 1/2"	20	3
	20" x 24"	22"	26"	20 1/2"	24 1/2"	15	4
	20" x 30"	22"	32"	20 1/2"	30 1/2"	20	4
	22" x 22"	24"	24"	22 1/2"	22 1/2"	17	4
	22" x 30"	24"	32"	22 1/2"	30 1/2"	22	4
	22" x 36"	24"	38"	22 1/2"	36 1/2"	24	5
	24" x 24"	26"	26"	24 1/2"	24 1/2"	18	4
	24" x 30"	26"	32"	24 1/2"	30 1/2"	22	5
	24" x 36"	26"	38"	24 1/2"	36 1/2"	25	5
	30" x 30"	32"	32"	30 1/2"	30 1/2"	30	5
	36" x 36"	38"	38"	36 1/2"	36 1/2"	41	5

Sizes Not Shown May be Ordered in 1/4" Increments on Blank Line Above
 For Example 16-1/4", 16-1/2" or 16-3/4"
 Note: TMPG and TMEG Max Ceiling Size: 36"x 36".

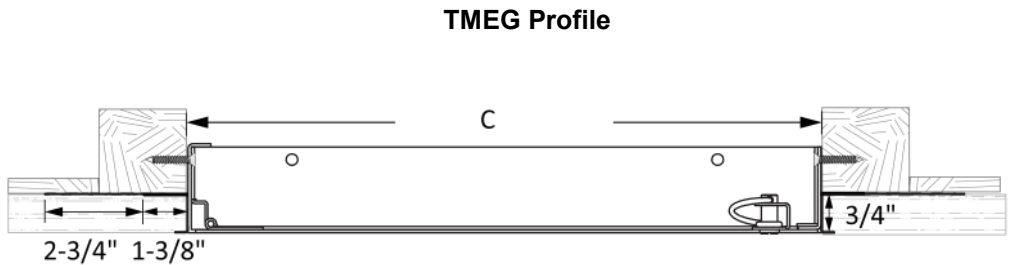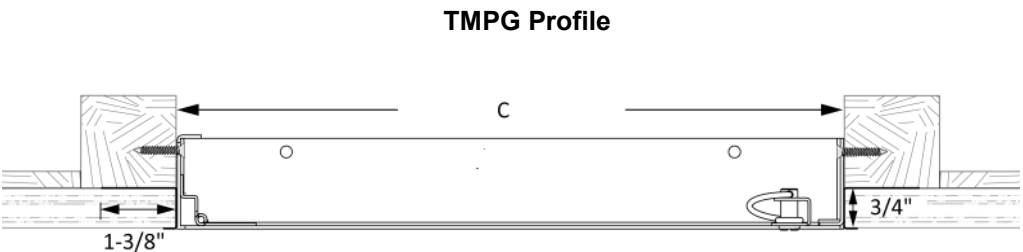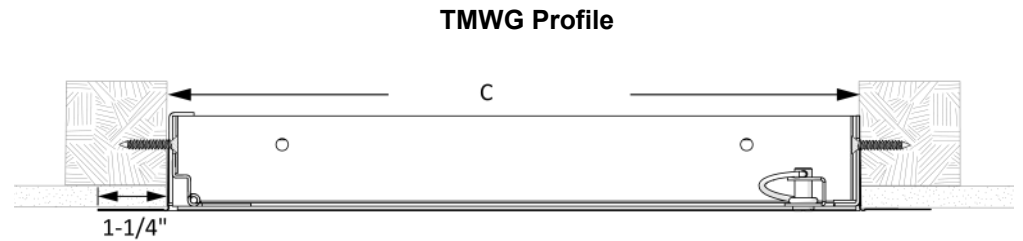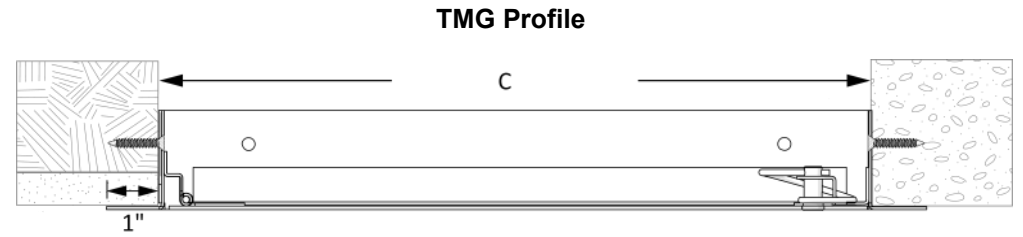

Standard Color is White, Optional Colors at Additional Cost - Samples Available

