





ENTRANCE GRATE - Activ-Grate™ EG600 Series - Aluminum Roll-Up Grate

EFRA

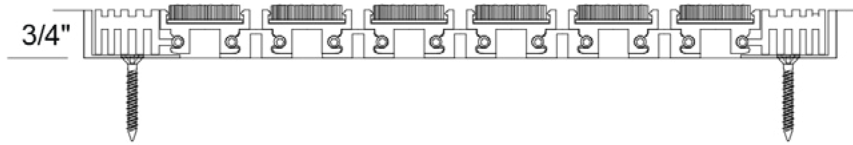

EFRA6: Angle frame 3/4" (19 mm) deep by 1/8" (3.2mm) profile. End filler is provided at both ends to create a snug fit.

EFRC



EFRC6: Cast-in-place recessed level-bed frame with mitered corners that connect quickly with corner keys. 1-3/8" (34.9mm) frame has 3/4" (19mm) recess for tread rail and 1/2" (12.7 mm) wide profile. End filler is provided at both ends to create a snug fit.

**ACTIV-GRATE™ 600 SERIES:
LDPE HINGES, MAXIMUM LOAD CAPACITY, RECESSED**

Designed for wheel loads of up to 1000 lbs, the tough 600 series grating can withstand heavy traffic. Recessed installation of this grating always provides a smooth transition to the interior of your building.

FEATURES:

- LDPE hinges keep grating quiet and cushion impact
- Rolls up during cleaning and features adjustable spacers.
- Drainage holes between tread rails allows moisture and dirt to fall below mat.
- Mat rolls up compactly for cleaning.

PRODUCT DETAILS:

Rail Material: 6063-T6 extruded aluminum alloy

Frame Material:

EFRA: 6063-T6 extruded aluminum alloy

EFRC: 6063-T5 extruded aluminum alloy

Depth: 3/4" (19 mm).

Standard Finish: Mill

Tread Spacing: 1-1/2" (38.1 mm) on center with 8 treads per foot in the direction of travel.

Spacing Between Rails: Heel-proof spacing of 5/32"

Rolling Wheel Load Rating: 1000 lb

NOTE:

Verify traffic direction - traffic to run perpendicular to rails.

Maximum single mat size not to exceed 12'-0" (3.66m) in width (dim "x") or 100 sq. ft.


If multiple sections, verify sectioning does not occur in traffic path.

Vinyl filler to be trimmed in field for tight fit (n/a for surface mount applications).

Mat dimensions allow for clearance between mat section(s) and frame(s) in width (dim "x").

Additional product information including installation instructions may be found at www.activarcpg.com/jl-industries


ACTIV-GRATE 600 SERIES INSERTS




Premium Carpet
EG600




Vinyl
EG601




Serrated Aluminum
EG602



Vinyl Abrasive
EG604



Tuff Tread™
EG605

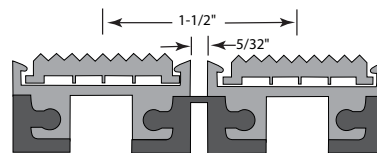

EG602 Cross-Section



9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide



JL INDUSTRIES

800-554-6077 952-835-2218 sales@activarcpg.com www.activarcpg.com

**Entrance Grate
Activ-Grate™ EG600 Series
Data Sheet**