SUBMITTAL: COSMOPOLITAN™ STAINLESS STEEL FX2™ FIRE EXTINGUISHER CABINETS TRIMLESS

PAGE 1 OF 2

The Cosmopolitan Series in Stainless Steel Is a Modern, Clean Look for Fully Recessed Cabinets. The FX2 Fire-Rated Trimless Series is Designed to be Installed Between the layers of Drywall or Under Plaster for a Flush, Finished Surface.

Door Construction: # 4 stainless steel. Flush cabinet doors are attached by a continuous hinge and equipped with zinc-plated handle and roller catch.

Flange for Drywall, Stucco or Plaster: 1-1/2" wide recessed flange is to be concealed by drywall, stucco or plaster. 5/8" Drywall - first layer of drywall is to be installed before cabinet, second layer over flange after cabinet is installed. 3/4" depth Plaster or Stucco - fire-rated substrate is to be installed before cabinet, and plaster applied after cabinet is installed.

Tub: The tub is constructed of cold rolled steel with silver powder-coat finish standard. Tub forms a flange to cover cut edges of wallboard material. Fire-resistant material is attached to the exterior of the tub.

Fire Rating: Fire-FX2™ cabinets are UL listed and labeled as an approved membrane penetration firestop system for up to 2 hours in accordance with UL 1479 (ASTM-E814) and CAN/ULC-S115, when properly installed in a wall assembly according to installation instructions.

STEP 1: SELECT MODEL NUMBER AND QUANTITY ON CHART (refer to chart on pg 2) STEP 2: SELECT DOOR STYLE WITH HANDLE Check one box below Examples on Page 2 F Full Glazing in 1-1/4" wide Frame L22 Solid with SAF-T-LOK L24 Sold with Cylinder Lock - No Handle G Full Glazing with SAF-T-LOK™ in 1-1/4" Frame 8134WV10FX2 V Vertical Duo D Horizontal Duo Panel W Vertical Duo with SAF-T-LOK E Horizontal Duo Panel with SAF-T-LOK B Solid with 2" x 4" View Window & SAF-T-LOK S21 Solid Door **STEP 3: SELECT DOOR GLAZING** (Check one box below) 10 Clear Acrylic 15 Bronze Acrylic 17 Clear Tempered Glass 18 Laminated Safety Glass 13 Wire Glass with Safety Film 16 Gray Acrylic STEP 4: OPTIONAL FEATURES AT ADDED COST (SELECT ANY) Futura "Fire" Pull Mill Alum Red White Black Vertical FE Letters LDCVBFE Black Vertical Decal LDVBFE (CA) Commander Alarm Flush Recessed Pull Handle PRH Red Vertical FE Letters LDCVRFE Red Vertical Decal LDVRFE (BA) Brigadier Alarm Polished Chrome Handle PUCH White Vertical FE Letters LDCVWFE White Vertical Decal LDVWFE Vertical Red FE Silkscreen Lettering- SSFELVR Door Glass Stainless Pull Handle PUS-US32D Black Horizontal FE Letters LDCHBFE Black Horizontal Decal LDHBFE Lettering: Etched on Glass, Engraved on Metal, Silkscreen; Not Red Horizontal FE Letters LDCHRFE Red Horizontal Decal LDHRFE available for #7 or #8 finish on doors. Attach separate submittal to order. Optional Stainless Finish: View Stainless Finishes Online White Horizontal FE Letters LDCHWFE White Horizontal Decal LDHWFE

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.

Project:

Architect:

Item #

Quantity:

Pages: 1 of 1

Approved By:

The information contained in this document is the sole property of Activar Construction Products Group, Inc. Any reproduction in part of as a whole without the written permission of Activar Construction Products Group, Inc. is prohibited.

Distributor:

Contractor:

Scale: N/A

Date:

800-554-6077

sales@activarcpg.com

www.activarcpg.com

9702 Newton Av S. Bloomington, MN 55431


INDUSTRIES

SUBMITTAL: COSMOPOLITAN STEEL FIRE-FX2™ FIRE EXTINGUISHER CABINETS TRIMLESS

PAGE 2 OF 2

TR	IM & DOOR S	Tub I.D.			Frame O.D.		Wall Opening				
QTY	Model	Trim Style		B Height	C Depth	E Width	F Height	W Width	H Height	D Depth	FITS FIRE EXTINGUISHERS
TRIMLESS CABINET WITH RECESSED FLANGE FOR INSTALLATION OF 5/8" DRYWALL OVER AND UNDER FLANGE Example of Part # 8134WF10FX2											
	8134W_FX2	Trimless• Drywall	9	18	5 1/2	12 1/8	21 1/8	11 5/16	20 5/16	6 3/16	Cosmic & Galaxy 2 1/2-6 (6lb must be mounted on cabinet tub), Mercury 2 1/2- 5
	111134W FX7	Trimless• Drywall	10 1/2	24	6	13 5/8	27 1/8	12 13/16	26 5/16	6 11/16	Cosmic & Galaxy 2 1/2-10 Mercury 2 1/2-5 , Sentinel 5
	2034W_FX2	Trimless• Drywall	12	27	7 3/4	15 1/8	30 1/8	14 5/16	29 5/16	8 7/16	Any Cosmic or Galaxy (20 lb must be mounted to back of tub), Mercury, Saturn or Grenadier P, Sentinel 5 & 10, Nebula 270
TRIMLESS CABINET WITH RECESSED FLANGE FOR INSTALLATION OF 3/4" PLASTER OVER FLANGE Example of Part # 1034PF10FX2											
	8134P_FX2	Trimless● Plaster	9	18	5 1/2	12 1/8	21 1/8	11 5/16	20 5/16	6 1/16	Cosmic & Galaxy 2 1/2-6 (6lb must be mounted on cabinet tub), Mercury 2 1/2- 5
	1034P_FX2	Trimless● Plaster	10 1/2	24	6	13 5/8	27 1/8	12 13/16	26 5/16	6 9/16	Cosmic & Galaxy 2 1/2-10 Mercury 2 1/2-5 , Sentinel 5
	2034P_FX2	Trimless• Plaster	12	27	7 3/4	15 1/8	30 1/8	14 5/16	29 5/16	8 5/16	Any Cosmic or Galaxy (20 lb must be mounted to back of tub), Mercury, Saturn or Grenadier P, Sentinel 5 & 10, Nebula 270

• Cabinets meet 4" ADA projection requirements.

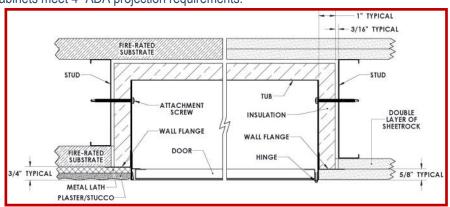


5/8" DRYWALL (W) 3/4" PLASTER (P) See Installation Instructions for Complete Details

ADA Cabinet Mounting Height:


Standard Pull on G, E, W, L22 and B Door Styles with Saf-T-Lok are 3 5/8" Higher than Door Center, so Allow for that When Mounting Cabinet.

Standard Pull with No Lock or Flush Pull are Centered on Door.

Wall Opening Cabinet **Dimensions**



DRYWALL INSTALLATION EXAMPLE







D - Horizontal duo V - Vertical duo panel with pull . handle E - Horizontal duo W - Vertical duo panel with pull handle and Saf-T-Lok. (Not Shown)



panel with pull . handle panel with pull handle and Saf-T-Lok. (Not



S21 - Solid with pull handle L22 - Solid with pull handle and Saf-T-Lok L24 - Solid with

cylinder key lock

and no handle

