
FIRE PROTECTION CABINET - SPECIALTY: SECURITY SERIES - Stainless Steel

As a leader in the industry, JL Industries offers security and detention cabinets for fire extinguishers, fire hoses or fire department valves to meet security requirements. Available with a wide variety of lock options, this cabinet will meet your project needs.

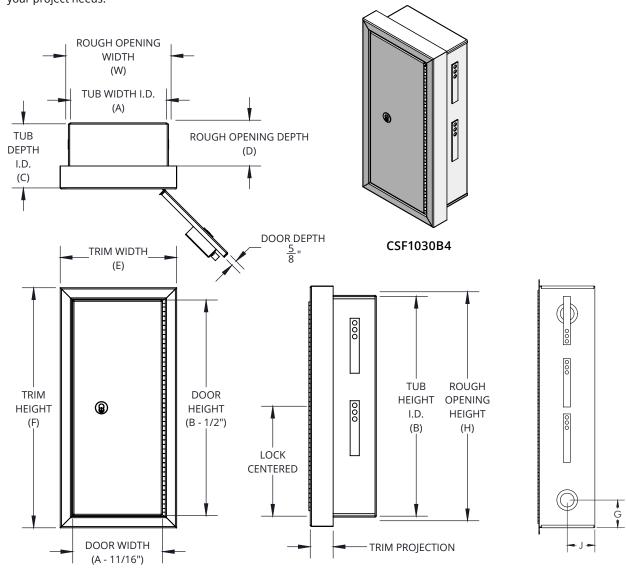

SPECIFICATIONS:

Tub Material: 14 gauge stainless steel with masonry anchors Trim Material: 14 gauge stainless steel, full recessed 1/8" square flat, semi-recessed 2-1/2" square trim, surface mount square trim

Door Material & Style: 14 gauge stainless steel; solid door with security prep or lock installed

Hinge: Continuous hinge, 14 gauge cold rolled steel, powder coat white, opens to 180°

Lock: Lock options, see page 3 Finish: #4 stainless steel

ADA Compliance: Cabinet cannot protrude more than 4" and the handle cannot be mounted more than 48" above finished floor. Surface-mount does not comply with ADA.

OPTIONS:

Lock Preps: Mortise cam, Mortise deadbolt, detention deadbolt, detention deadbolt Mogul, detention slam, detention slam Mogul

Finish: Red, black, other powder coat colors


Lettering: Silkscreen, engraving

ADDITIONAL ACCESSORIES (sold separately)

Die cuts, decals, plastic signs

See supplemental submittals for more information on various options and accessories.

Interpretation of fire and building codes may vary. Consult with the local authority having jurisdiction (AHJ) to determine appropriate standards.




FIRE PROTECTION CABINET - SPECIALTY: SECURITY SERIES - Stainless Steel

QTY	MODEL & TRIM		ADA	TUB I. D. 1		TRIM O. D.		WALL ROUGH OPENING*		KNOCKOUT LOCATIONS		wt	COMPATIBLE FIRE		
	MODEL	TRIM PROJECTION	≤4"	WIDTH (A)	HEIGHT (B)	DEPTH (C)	WIDTH (E)	HEIGHT (F)	WIDTH (W)	HEIGHT (H)	DEPTH (D)	(J)	(G)	LBS	EXTINGUISHERS
	FIRE EXTINGUISHER CABINET														
	CSF1035	full recessed 1/8" flat square	✓	10-½"	24"	7"	12-½"	26"	11-½"	25"	7-1/2"	-	-	25	Cosmic,
	CSF1030	semi-recessed 2-½" square	✓	10-½"	24"	7"	12-½"	26"	11-1/2"	25"	5"	-	-	26	Galaxy 2.5 - 10 lb Mercury 2.5 - 5 lb,
	CSF1033	surface-mount square		13"	26-1⁄2"	8"	13-1%"	26-%"	-	-	-	-	-	26	Sentinel 5 lb
	CSF2035	full recessed 1/8" flat square	✓	12"	27"	8-1/2"	14"	29"	13"	28"	9-1/2"	-	-	33	Any Cosmic/Galaxy,
	CSF2030	semi-recessed 2-½" square	✓	12"	27"	8-1/2"	14"	29"	13"	28"	6-1/2"	-	-	34	Mercury, Saturn 15,
	CSF2033	surface-mount square		14-1/2"	29-½"	10"	14-%	29-%"	-	-	-	-	-	34	Sentinel 5 lb
	VALVE CABINET														
	CSF8535	full recessed 1/8" flat square	✓	18"	18"	8-1/2"	20"	20"	19"	19"	9"	5"	5"	32	4.1/11 2.1/11
	CSF8530	semi-recessed 2-½" square	✓	18"	18"	8-1/2"	20"	20"	19"	19"	6-1/2"	4-1⁄4"	4-1⁄4"	33	1-½" or 2-½" Fire Department Valve
	CSF8533	surface-mount square		20-½"	20-1⁄2"	10"	20-%"	20-%"	-	-	-	-	-	33	vaive
	HOSE CABINET														
	CSF6535	full recessed 1/8" flat square	✓	32-¾"	34-¾"	8"	34-¾"	36-¾"	33-¾"	35-¾"	8-1/2"	4"	4"	88	1-½" or 2-½"
	CSF6530	semi-recessed 2-½" square	✓	32-¾"	34-¾"	8"	34-¾"	36-¾"	33-¾"	35-¾"	6"	4"	4"	95	Fire Department Valve,
	CSF6533	surface-mount square		36-¾"	38-¾"	8"	36-%"	38-%"	-	-	-	-	-	104	100' hose rack unit

See page 1 for knockout view

*Confirm wall rough opening depth prior to ordering

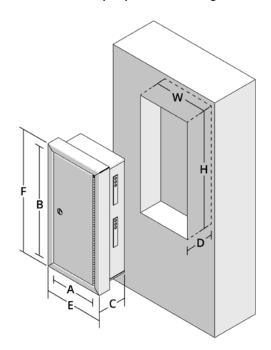

TRIM STYLE & PROJECTION					
RECESSED	SEMI- RECESSED	SURFACE- MOUNT			
5	0	3			
	J				
3/8"	2-1/2"	8" to 10"			
Flat Square	Square	Square			

LETTERING OPTIONS


QTY	MODEL	DESCRIPTION				
	SS	Silkscreen				
	EN	Engraving				
LETTERING - OTHER (please specify) Refer to supplemental submittal						
	Other					

PLASTIC SIGNS (sold separately)

QTY	MODEL	DESCRIPTION				
	225	FE, 3D ANGLE, 4" x 12"				
	235	FE, 3D TENT, 4" x 18"				
	245	FE, 3D TENT, 5" x 6"				
	255	FE, FLUSH, 4" x 12"				

LETTERING (sold separately)

	LETTERING (Sold Separately)							
QTY	MODEL	"FIRE EXTINGUISHER" DESCRIPTION						
	LDCVRFE	DIE CUT, VERT, RED, 3/4" x 18"						
	LDCVBFE	DIE CUT, VERT, BLACK, 3/4" x 18"						
	LDVRFE	DECAL, VERT, RED, 3/4" x 18"						
	LDCVRFE-ESM-A	DIE CUT, VERT, RED, (fits 81 tub), 3/4" x 14"						
	LDCHRFE-2	DIE CUT, HORZ, RED, 2" HIGH, 4-1/2" x 21"						
	Other							

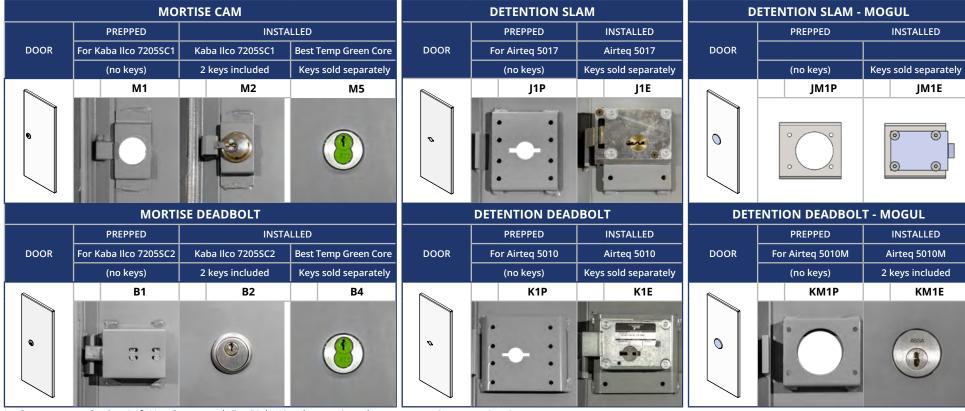

Locks come standard as Left Hand operated. For Right Hand operation please contact Customer Service.

LOCK PARTS - SOLD SEPARATELY

QTY	LOCK TYPE	MODEL	DESCRIPTION				
	MORTISE CAM/DEADBOLT						
	142	06431	Kaba Ilco 7205SC1, 1-1/4" Dia x 1-1/4" long mortise cylinder with standard cam				
	M2	06431-KEY	Key for 06431				
	M2/M5	0646	Lock nut ring (req. for cylinders if supplied by others)				
	М5	08356	Best 1E74C4RP3626, 1-1/4" long mortise cylinder with C4 cam				
	B2	06441	Kaba Ilco 7205SC2, 1-1/4" Dia x 1-1/4" long mortise cylinder with Adams Rite cam				
		06441-KEY	Key for 06441				
	В4	SL-1E74	Temporary green construction core, Best 1E74C181RP3626, 1-1/4" diameter x 1-1/4" long mortise cylinder with C181 Adam Rite cam				
	M5/B4	040004	Key, Operation				
		040005	Key, Control to remove core				
	Other	Specify:					

QTY	QTY LOCK TYPE MODEL		DESCRIPTION					
	DETENTION SLAM							
	J1E	DDI-5017	Airteq 5017 medium security, latchbolt 1" x 7/16" bolt throw					
		DDK-5017	Key for DDI-5017 (sold separately)					
	18445	DDI-5017M	Airteq 5017M, Mogul, medium security, stainless steel 1" x 7/16" bolt					
	JM1E	DDK-5017M	Keys for DDI-5017M					
	DETENTION DEADBOLT							
	K1E	DDI-5010	Airteq 5010, zinc plated steel bolt 1-1/2" x 3/4" and 5/8" bolt throw					
	KIE	DDK-5010	Key for DDI-5010 (sold separately)					
	KM1E	DDI-5010M	Airteq 5010M, Mogul zinc plated steel bolt 1- 1/2" x 1/2" and 5/8" throw					
		DDK-5010M	Keys for DDI-5010M					
	Other	Specify:						