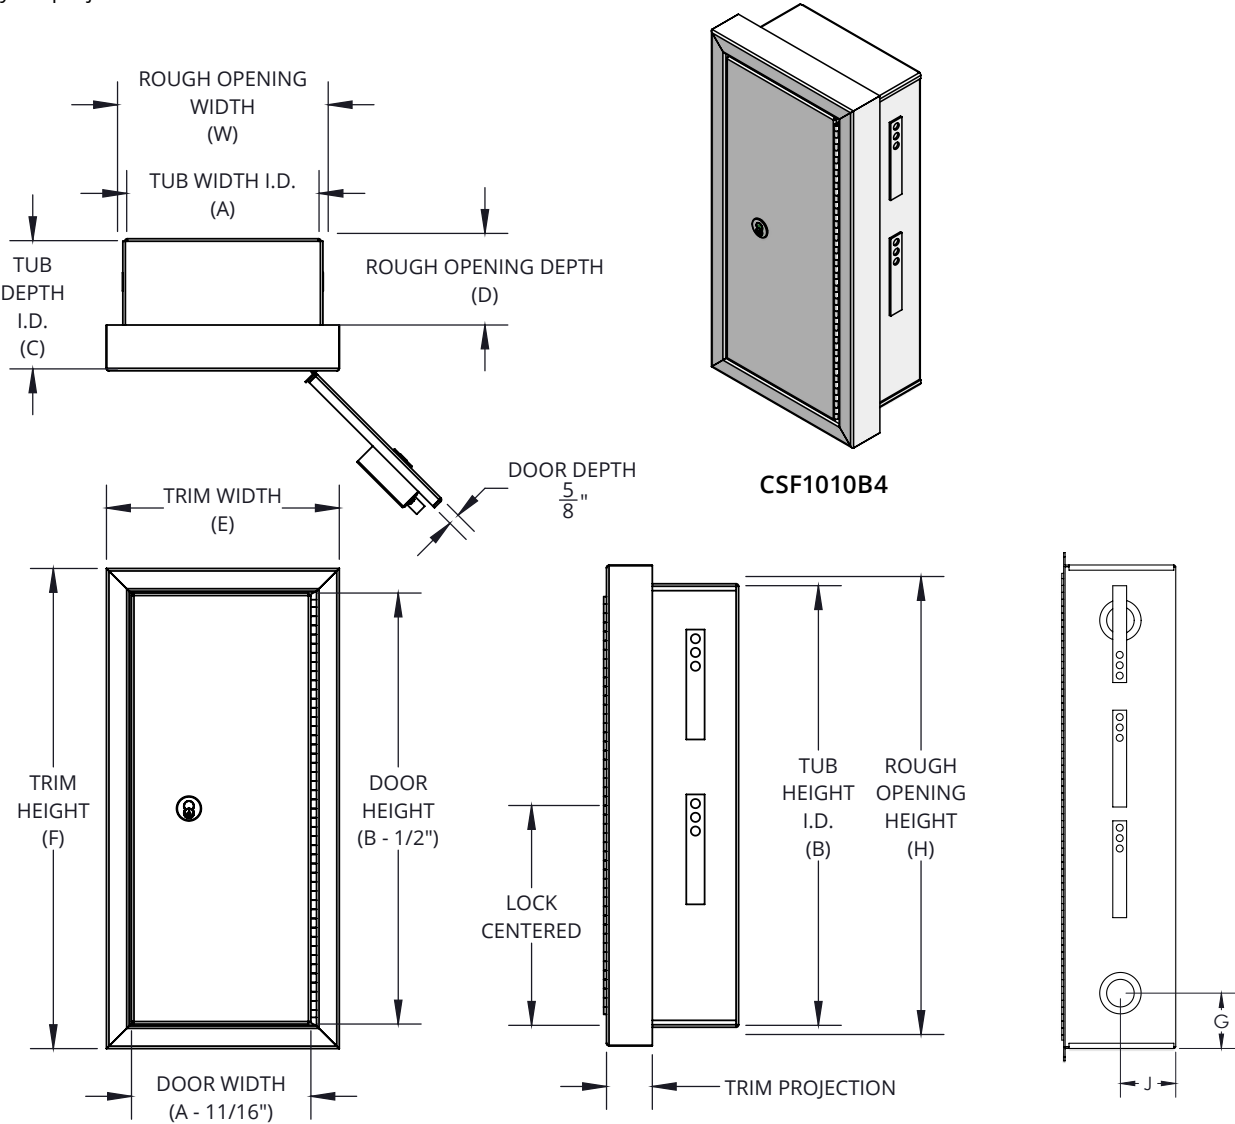


FIRE PROTECTION CABINET - SPECIALTY: SECURITY SERIES - Steel

As a leader in the industry, JL Industries offers security and detention cabinets for fire extinguishers, fire hoses or fire department valves to meet security requirements. Available with a wide variety of lock options, this cabinet will meet your project needs.



SPECIFICATIONS:

- Tub Material:** 12 gauge cold rolled steel (CRS) with masonry anchors
- Trim Material:** 12 gauge cold rolled steel (CRS), full recessed 1/8" square flat, semi-recessed 2-1/2" square trim, surface mount square trim
- Door Material & Style:** 20 gauge cold rolled steel; solid door with security prep or lock installed
- Hinge:** Continuous hinge, 12 gauge cold rolled steel, powder coat white, opens to 135°
- Lock:** Lock options, see page 3
- Finish:** White powder coat
- ADA Compliance:** Cabinet cannot protrude more than 4" and the handle cannot be mounted more than 48" above finished floor. Surface-mount does not comply with ADA.

OPTIONS:

- Lock Preps:** Mortise cam, Mortise deadbolt, detention deadbolt, detention deadbolt Mogul, detention slam, detention slam Mogul
- Finish:** Red, black, other powder coat colors
- Lettering:** Silkscreen, engraving

ADDITIONAL ACCESSORIES (sold separately)

Die cuts, decals, plastic signs
See supplemental submittals for more information on various options and accessories.

Interpretation of fire and building codes may vary. Consult with the local authority having jurisdiction (AHJ) to determine appropriate standards.



JL INDUSTRIES
7902 Newton Avenue S, Bloomington, MN 55431

 800-554-6077

 sales@activarcpg.com

 www.activarcpg.com

Distributor:		Project:	
Contractor:		Approved By:	
Date:		Architect:	
Scale: N/A	Page 1 of 3	Item#:	

© 2025 Activar Construction Products Group, Inc.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION IS PROHIBITED.

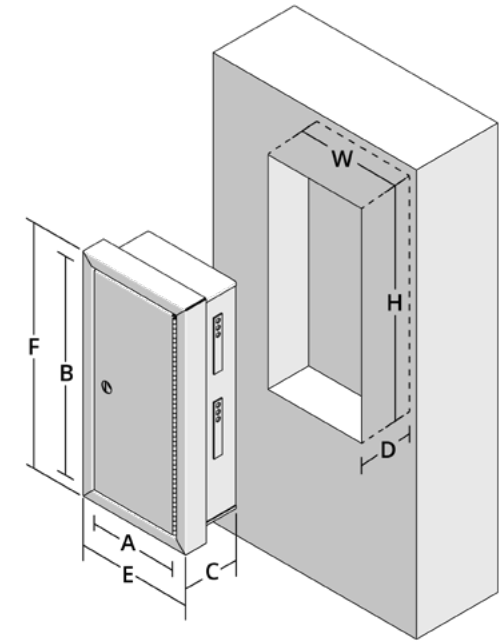
10-20-2025

FIRE PROTECTION CABINET - SPECIALTY: SECURITY SERIES - Steel

*Confirm wall rough opening depth prior to ordering

QTY	MODEL & TRIM		ADA	TUB I. D.			TRIM O. D.		WALL ROUGH OPENING*			KNOCKOUT LOCATIONS		WT	COMPATIBLE FIRE EXTINGUISHERS
	MODEL	TRIM PROJECTION	≤4"	WIDTH (A)	HEIGHT (B)	DEPTH (C)	WIDTH (E)	HEIGHT (F)	WIDTH (W)	HEIGHT (H)	DEPTH (D)	(J)	(G)	LBS	
FIRE EXTINGUISHER CABINET															
	CSF1015	full recessed 1/8" flat square	✓	10-½"	24"	7"	12-½"	26"	11-½"	25"	7-½"	-	-	25	Cosmic, Galaxy 2.5 - 10 lb Mercury 2.5 - 5 lb, Sentinel 5 lb
	CSF1010	semi-recessed 2-½" square	✓	10-½"	24"	7"	12-½"	26"	11-½"	25"	5"	-	-	26	
	CSF1013	surface-mount square		13"	26-½"	8"	13-⅝"	26-⅝"	-	-	-	-	-	26	
	CSF2015	full recessed 1/8" flat square	✓	12"	27"	8-½"	14"	29"	13"	28"	9-½"	-	-	33	Any Cosmic/Galaxy Mercury, Saturn 15, Sentinel 5 lb
	CSF2010	semi-recessed 2-½" square	✓	12"	27"	8-½"	14"	29"	13"	28"	6-½"	-	-	34	
	CSF2013	surface-mount square		14-½"	29-½"	10"	14-⅝"	29-⅝"	-	-	-	-	-	34	
VALVE CABINET															
	CSF8515	full recessed 1/8" flat square	✓	18"	18"	8-½"	20"	20"	19"	19"	9"	5"	5"	32	1-½" or 2-½" Fire Department Valve
	CSF8510	semi-recessed 2-½" square	✓	18"	18"	8-½"	20"	20"	19"	19"	6-½"	4-¼"	4-¼"	33	
	CSF8513	surface-mount square		20-½"	20-½"	10"	20-⅝"	20-⅝"	-	-	-	-	-	33	
HOSE CABINET															
	CSF6515	full recessed 1/8" flat square	✓	32-¾"	34-¾"	8"	34-¾"	36-¾"	33-¾"	35-¾"	8-½"	4"	4"	88	1-½" or 2-½" Fire Department Valve, 100' hose rack unit
	CSF6510	semi-recessed 2-½" square	✓	32-¾"	34-¾"	8"	34-¾"	36-¾"	33-¾"	35-¾"	6"	4"	4"	95	
	CSF6513	surface-mount square		36-¾"	38-¾"	8"	36-⅞"	38-⅞"	-	-	-	-	-	104	

See page 1 for knockout view



TRIM STYLE & PROJECTION		
RECESSED	SEMI-RECESSED	SURFACE-MOUNT
5	0	3
3/8" Flat Square	2-½" Square	8" to 10" Square

FINISH OPTIONS			LETTERING OPTIONS		
QTY	MODEL	DESCRIPTION	QTY	MODEL	DESCRIPTION
	(none)	White (Std.)		SS	Silkscreen
	BK	Black		EN	Engraving
	R	Red	LETTERING - OTHER (please specify) Refer to supplemental submittal		
COLOR - OTHER (please specify) Refer to supplemental submittal				Other	
Door/Trim/ Tub					

Must be same finish color for door, trim, tub


PLASTIC SIGNS (sold separately)		
QTY	MODEL	DESCRIPTION
	22S	FE, 3D ANGLE, 4" x 12"
	23S	FE, 3D TENT, 4" x 18"
	24S	FE, 3D TENT, 5" x 6"
	25S	FE, FLUSH, 4" x 12"


LETTERING (sold separately)		
QTY	MODEL	"FIRE EXTINGUISHER" DESCRIPTION
	LDCVRF	DIE CUT, VERT, RED, 3/4" x 18"
	LDCVBFE	DIE CUT, VERT, BLACK, 3/4" x 18"
	LDVRF	DECAL, VERT, RED, 3/4" x 18"
	LDCVRF-ESM-A	DIE CUT, VERT, RED, (fits 81 tub), 3/4" x 14"
	LDCHRF-2	DIE CUT, HORZ, RED, 2" HIGH, 4-½" x 21"
	Other	



FIRE PROTECTION CABINET - SPECIALTY: SECURITY SERIES - Steel



MORTISE CAM			
DOOR	PREPPED	INSTALLED	
	For Kaba Ilco 7205SC1	Kaba Ilco 7205SC1	Best Temp Green Core
	(no keys)	2 keys included	Keys sold separately
	M1 	M2 	M5 

MORTISE DEADBOLT			
DOOR	PREPPED	INSTALLED	
	For Kaba Ilco 7205SC2	Kaba Ilco 7205SC2	Best Temp Green Core
	(no keys)	2 keys included	Keys sold separately
	B1 	B2 	B4 

DETENTION SLAM		
DOOR	PREPPED	INSTALLED
	For Airteq 5017	Airteq 5017
	(no keys)	Keys sold separately
	J1P 	J1E 

DETENTION DEADBOLT		
DOOR	PREPPED	INSTALLED
	For Airteq 5010	Airteq 5010
	(no keys)	Keys sold separately
	K1P 	K1E 

DETENTION SLAM - MOGUL		
DOOR	PREPPED	INSTALLED
	(no keys)	Keys sold separately
	JM1P 	JM1E 

DETENTION DEADBOLT - MOGUL		
DOOR	PREPPED	INSTALLED
	For Airteq 5010M	Airteq 5010M
	(no keys)	2 keys included
	KM1P 	KM1E 

Locks come standard as Left Hand operated. For Right Hand operation please contact Customer Service.

LOCK PARTS - SOLD SEPARATELY

QTY	LOCK TYPE	MODEL	DESCRIPTION
MORTISE CAM/DEADBOLT			
	M2	06431	Kaba Ilco 7205SC1, 1-1/8" Dia x 1-1/4" long mortise cylinder with standard cam
		06431-KEY	Key for 06431
	M2/M5	0646	Lock nut ring (req. for cylinders if supplied by others)
	M5	08356	Best 1E74C4RP3626, 1-1/4" long mortise cylinder with C4 cam
	B2	06441	Kaba Ilco 7205SC2, 1-1/8" Dia x 1-1/4" long mortise cylinder with Adams Rite cam
		06441-KEY	Key for 06441
	B4	SL-1E74	Temporary green construction core, Best 1E74C181RP3626, 1-1/8" diameter x 1-1/4" long mortise cylinder with C181 Adam Rite cam
	M5/B4	040004	Key, Operation
		040005	Key, Control to remove core
	Other	Specify:	

QTY	LOCK TYPE	MODEL	DESCRIPTION
DETENTION SLAM/DEADBOLT			
	J1E	DDI-5017	Airteq 5017 medium security, latchbolt 1" x 7/16" bolt throw
		DDK-5017	Key for DDI-5017 (sold separately)
	JM1E	DDI-5017M	Airteq 5017M, Mogul, medium security, stainless steel 1" x 7/16" bolt
		DDK-5017M	Keys for DDI-5017M
DETENTION DEADBOLT			
	K1E	DDI-5010	Airteq 5010, zinc plated steel bolt 1-1/2" x 3/4" and 5/8" bolt throw
		DDK-5010	Key for DDI-5010 (sold separately)
	KM1E	DDI-5010M	Airteq 5010M, Mogul zinc plated steel bolt 1- 1/2" x 1/2" and 5/8" throw
		DDK-5010M	Keys for DDI-5010M
	Other	Specify:	