
## **GLAZING TAPE**

Please refer to detailed installation instructions for your particular vision lite product to assure that you are using the correct glazing tapes for your application.

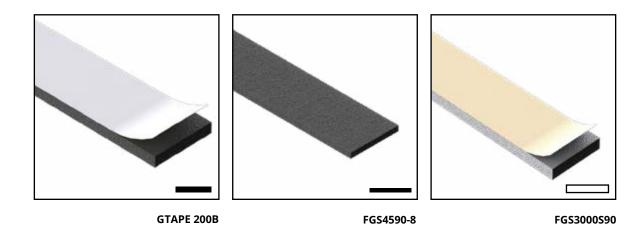

**INSTALLATION:** See detailed installation instructions for your product. Place exposed adhesive side directly on to clean surface of vision frame as directed by the installation instructions for the product that it will be applied to. Do not stretch material, as product can retract or shrink if stretched. Remove release liner when properly positioned. This product has a shelf life of 6 months. Store and install product at temperatures between 50°F and 100°F. Adhesive is fully set in 24 hours.

QTY	MODEL	WIDTH	HEIGHT	ROLL LENGTH	MATERIAL	COLOR	UL RATING (LISTED	USES
	GTAPE 200B	3/8"	1/16"	200 ft	Medium density closed cell polyvinyl chloride foam glazing tape with adhesive backing.	Black	N/A	Standard glazing & PAKs
	FGS4590-8	7/16"	3/64"	8 ft	Fire rated intumescent tape with adhesive backing on one side.	Black	WH/UL/UL10C	Installed to vision lite pocket in addition to the 1/16" std. tape. Required for UL10C positive pressure installations.
	FGS3000S90	7/16"	5/64"	16 ft	Aluminum hydroxide intumescent with adhesive backing	White	UL10B/UL10C	Use with Wireshield Glazing. Installed to vision lite pocket in addition to the 1/16" standard tape. Required for UL10C positive pressure installations and for larger exposed glazing areas.

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.



800-554-6077

sales@activarcpg.com

www.activarcpg.com

Distributor:		Project: Approved By:		
Contractor:				
Date:		Architect:		
Scale: N/A	Pages: 1 of 1	Item #:		