
BEVELED VISION LITE FOR 3/16"-1/4" GLAZING: VLFEZ™

Self-Attaching, Beveled Vision Lite with Single Side Fasteners For Fire Rated Doors for 3/16" to 1/4"Glass

SPECIFICATIONS:

| Material: | 20 gauge CRS frame. Min Size 4" x 4", Max 60" x 104". See Fire Rating Below. | | | | | |
|--|---|--|--|--|--|--|
| Construction: | 1-1/4" trim, with mitered and welded corners. Continuous glass retainer, countersunk mounting holes in the bevel on non-corridor side. 1/4" projection from door. | | | | | |
| Door: | For 1-3/4" door. For other sizes, see models VSIG, VLFIG & VLFEZIG. Door cutout = order size. | | | | | |
| Fasteners: | #8 x 1" flathead phillips SMS to match finish. | | | | | |
| Powder Coat Finishes: | (B) Mineral Bronze(G) Gray (stock colors)(BK) Black(FB) Flat Black(W) White(SB) SC Beige(SI) Silver(BA) Brass(S) Sand(AB) AMS Beige View Colors Online | | | | | |
| Glass: | 3/16" - 1/4" glazing to be ordered separately from glazing submittals. Visible light is 2" under rough opening size. Glass is 1" under order size. Use fire rated glazing with Warnock Hersey (WHI) or UL classification markings for fire rated applications. Fire-Rated Air Louvers Glazing to fit this vision frame: WS, KFRF, PPF. | | | | | |
| Fire-Rating, Testing & Listings: | When installed in properly rated and approved door, ratings up to 3 hours can be achieved, depending on the glazing used. See glazing ratings for max exposed area. Tested and Listed for UL 10C and Criteria of UBC 7-2 Positive Pressure. See detailed installation instructions. | | | | | |
| OPTIONS AT | ADDITIONAL COST: | | | | | |
| PAK: | Includes Vision Lite, Glass Sized to Fit, Applied Glazing tape for UL10B Installations, Securely Packaged Individually. See First Page in Vision Lite Catalog. | | | | | |
| UBC 7-2 Installation: | Additional intumescent tape for Positive Pressure UL10C . See detailed installation instructions. | | | | | |
| Finishes & Materials: | (S) 20 Gauge Stainless Steel: #4 Finish(G) Galvanneal(E) Zinc Plated | | | | | |
| Fasteners: | Torx Other: | | | | | |
| Mullions: | Factory welded to vision lite & painted. See Mullions Page in this section to order. | | | | | |
| Privacy Screen: | Add the Velo Privacy Screen to This Vision Lite—See Web Page for Details | | | | | |
| Custom: | Leadlined or special order—contact customer service. | | | | | |



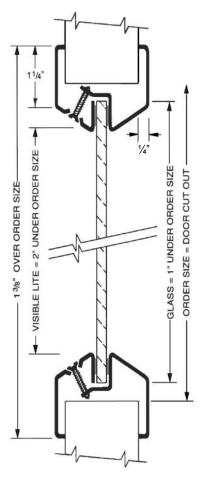

STOCK ITEM - MANY STANDARD SIZES OF VLFEZ IN STOCK FOR NEXT DAY SHIPMENT FROM ALL WAREHOUSES

| Order Format: VLFEZ | Option S,G,E | W | Н | Color | Example: VLFEZ 1212AB | |
|---------------------|--------------|---|---|-------|-----------------------|--|
|---------------------|--------------|---|---|-------|-----------------------|--|

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

| | Distributor: | | Width: x Height: | | | | | | | |
|---|--|--|----------------------|--------------------------|--|--|--|--|--|--|
| AIR LOUVERS | Architect: | | Quantity: | | | | | | | |
| | Contractor: | | Model: | | | | | | | |
| © 2023 Activar Construction Products Group, Inc. | Project: | | Date: | Version: 11/17/23 | | | | | | |
| 800-554-6077 <u>Q</u> иоте | S@ACTIVARCPG.COM ORDERS@ACTIVARCPG.COM | | SALES@ACTIVARCPG.COM | | | | | | | |
| WWW.ACTIVARCPG.COM | | | | | | | | | | |
| MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: SEE WEBSITE FOR LOCATIONS | | | | | | | | | | |